


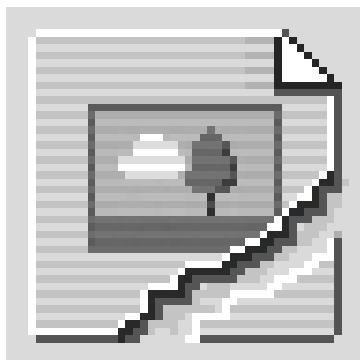

SKU: 31322-B10

UPC:

Features & Benefits:

Description: Crimp 'N Seal Fork Terminal, Conductor Range 14-16, #6 Bolt Size, Bag of 10

Specs

Additional Class Attributes

Conductor Entry	Funnel wire
Connection	Compression
Construction Type	Brazed
Installation Tooling	NA
Installing Dies	NA
Insulation Flared End	Yes
Insulation Grip	Yes
Mounting Hole Type	Thru
Number of Conductors	1
Number of Mounting Holes	1
Tongue Type	Fork

Dimensions

Height (IN)	0
Height BX (IN)	2
Length (IN)	0
Maximum Wire Insulation Diameter (IN)	0.190
Mounting Bolt/Stud Size (mm)	152.4
Weight (LB)	0.085
Weight BX (LB)	0.997
Width (IN)	0
Width BX (IN)	6.1875

Material and Finish

Conductor Material	Copper
Connector Finish	Tin
Fully Insulated	No
Insulation	Polyolefin
Material	Copper

General

Bag Quantity	10
Carton Quantity Description	STD PACK QTY 10
Dual Rated	No
NEMA Code	S-588-1



UPC Code

78366999845

Bolt and Screw Sizes

Mounting Bolt/Stud Size

#6

Testing Standards

Prop65 Compliance

WARNING: Cancer and Reproductive Harm -
www.P65warnings.ca.gov

UL Control Number

8M24

UL File Number

E158587

Environment and Temperature

Temperature Rating

90°C

Color

Color

Silver

Color Code

Blue

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load) NA

Conductor Range AL Stranded (Primary, run, main, line) NA

Conductor Range AL Stranded (Secondary, tap, load) NA

Conductor Range CU Solid (Primary, run, main, line) 14 Sol - 16 Sol

Conductor Range CU Solid (Secondary, tap, load) NA

Conductor Range CU Stranded (Primary, run, main, line) 14 Str - 16 Str

Conductor Range CU Stranded (Secondary, tap, load) NA

Conductor Range AL Solid (Primary, run, main, line) NA

Voltage

Voltage Rating

600 V