


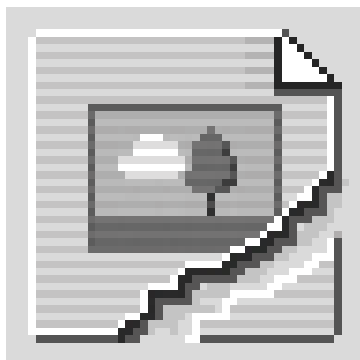

**SKU:** ACMN-500

**UPC:** 0783669021455

**Features & Benefits:**

**Description:** Aluminum Compression Pigtail Adaptor Conductor size 500, Tin Plated, cULus

## Specs

### Additional Class Attributes

|                         |             |
|-------------------------|-------------|
| Barrel Marking          | Ink         |
| Connecting Angle        | 180°        |
| Connection              | Compression |
| Contains DE-OX®         | Yes         |
| Flared End              | Yes         |
| ILSCOs Die Index Number | 300         |
| Number of Conductors    | 1           |
| Replacement Part(s)     | Cover       |

### Dimensions

|                |      |
|----------------|------|
| Height BX (IN) | 2.75 |
| Weight BX (LB) | 2.52 |
| Width BX (IN)  | 6    |

### Material and Finish

|                    |                                |
|--------------------|--------------------------------|
| Conductor Material | Copper/Aluminum                |
| Connector Finish   | Tin                            |
| Insulation         | Supplied with insulating cover |
| Material           | Aluminum                       |

### Additional Technical Specifications

|                |          |
|----------------|----------|
| Conductor Type | Stranded |
|----------------|----------|

### General

|                             |                 |
|-----------------------------|-----------------|
| Bag Quantity                | 1               |
| Carton Quantity Description | STD PACK QTY 10 |
| Dual Rated                  | No              |
| NEMA Code                   | S-588-3         |
| UPC Code                    | 78366902145     |

### Testing Standards



#### Prop65 Compliance

WARNING: Cancer and Reproductive Harm -  
[www.P65warnings.ca.gov](http://www.P65warnings.ca.gov)

UL Control Number

941R

UL / CULUS Specification

UL/cUL 486A/B Listed

UL File Number

E62547

### Environment and Temperature

Temperature Rating

90°C

### Color

Color

Silver

Color Code

Pink

### Voltage

Voltage Rating

600 V

Voltage Rating without cover

35 kV

### Conductor Ranges

Approximate Pin Size

350 kcmil