


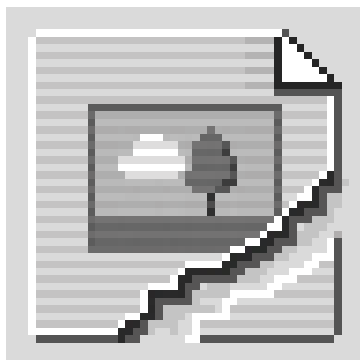

SKU: CSBS-10-P25

UPC: 0783669203417

Features & Benefits:

Description: CoolSeal Butt Splice, Conductor Range 10-12, Bag of 25

Specs

Dimensions

Height (IN)	0.256
Height BX (IN)	3.625
Height (mm)	6.5024
Length (IN)	1.245
Length (mm)	31.623
Maximum Wire Insulation Diameter (IN)	0.252
Outside Diameter (IN)	0.256
Outside Diameter (mm)	6.5024
Weight (LB)	0.225
Weight BX (LB)	13.5
Width (IN)	0.256
Width BX (IN)	6.375
Width (mm)	6.5024

Additional Class Attributes

Conductor Entry	Funnel wire
Connection	Compression
Construction Type	Butted
Installation Tooling	ILST-22K
Installing Dies	Die Set A
Insulation Flared End	No
Mounting Hole Type	NA
Number of Conductors	1

Material and Finish

Conductor Material	Copper
Connector Finish	Tin
Fully Insulated	Yes
Insulation	Nylon
Material	Copper

General

Bag Quantity	25
Carton Quantity Description	STD PACK QTY 1
Dual Rated	No

NEMA Code	S-588-3
UPC Code	78366920341

Bolt and Screw Sizes

Mounting Bolt/Stud Size	NA
-------------------------	----

Testing Standards

Prop65 Compliance	WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov
UL Control Number	453G
UL / CULUS Specification	UL/cUL 486C Listed
UL File Number	E6207

Color

Color	Silver
Color Code	Yellow

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	10 Sol - 12 Sol
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	10 Str - 12 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA

Voltage

Voltage Rating	600 V
----------------	-------

Environment and Temperature

Halogen Free	Yes
Temperature Rating	105°C