


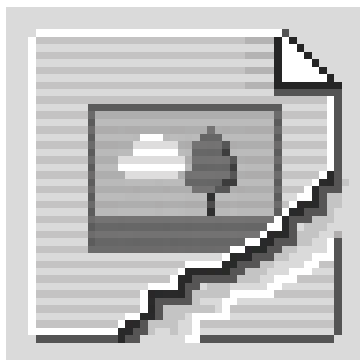

SKU: CSBS-18-P50

UPC: 0783669203394

Features & Benefits:

Description: CoolSeal Butt Splice, Conductor Range 18-22, Bag of 50

Specs

Dimensions

Height (IN)	0.165
Height BX (IN)	3.625
Height (mm)	4.191
Length (IN)	1.035
Length (mm)	26.289
Maximum Wire Insulation Diameter (IN)	0.157
Outside Diameter (IN)	0.165
Outside Diameter (mm)	4.191
Weight (LB)	0.2
Weight BX (LB)	12
Width (IN)	0.165
Width BX (IN)	6.375
Width (mm)	4.191

Additional Class Attributes

Conductor Entry	Funnel wire
Connection	Compression
Construction Type	Butted
Installation Tooling	ILST-22K
Installing Dies	Die Set A
Insulation Flared End	No
Mounting Hole Type	NA
Number of Conductors	1

Material and Finish

Conductor Material	Copper
Connector Finish	Tin
Fully Insulated	Yes
Insulation Material	Nylon
	Copper

General

Bag Quantity	50
Carton Quantity Description	STD PACK QTY 1
Dual Rated	No

NEMA Code	S-588-3
UPC Code	78366920339

Bolt and Screw Sizes

Mounting Bolt/Stud Size	NA
-------------------------	----

Testing Standards

Prop65 Compliance	WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov
UL Control Number	453G
UL / CULUS Specification	UL/cUL 486C Listed
UL File Number	E6207

Color

Color	Silver
Color Code	Red

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	18 Sol - 22 Sol
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	18 Str - 22 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA

Voltage

Voltage Rating	600 V
----------------	-------

Environment and Temperature

Halogen Free	Yes
Temperature Rating	105°C