


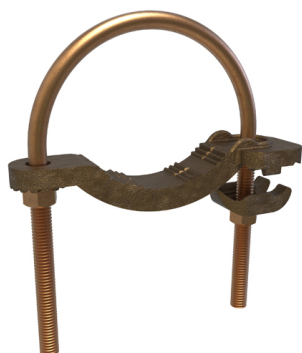

SKU: GPL3904BU

UPC: 0783669945485

Features & Benefits:

Description:Permaground Copper Waterpipe Ground Clamp, Conductor Range 4/0-4, Pipe Size 2-1/2 to 3-1/2in, UL

Specs

Additional Class Attributes

Connection	Mechanical
Number of Conductors	1
Number of Ports / Wireways	1
Wire Orientation	Perpendicular

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	NA
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	4/0 Str - 4 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA
Fits Pipe O.D. Range	2.88 - 4.00
NPS/IPS Pipe Size	3-1/2

Dimensions

Drive Size Main	3/8
Drive Type Main	External Hex
Height (IN)	6.5
Height BX (IN)	4.5
Height (mm)	165.1
Length (IN)	5.958
Length (mm)	151.3332
Weight (LB)	1.06
Width (IN)	1.475
Width BX (IN)	6.875
Width (mm)	37.465

Material and Finish

Conductor Material	Copper
Connector Finish	Bronze
Insulation	NA
Material	Copper



Wire Binding Hardware Material

Silicon bronze

Additional Technical Specifications

Conductor Type

Stranded

Bolt and Screw Sizes

Clamping Bolt Size	1/4
Number of Wire Binding Screws per Port	0
Wire Binding Screw Size	NA

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 5
Direct Burial	Yes
Dual Rated	No
NEMA Code	S-573-2
UPC Code	78366994548

Testing Standards

Prop65 Compliance	WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov
UL Control Number	667P
UL / CULUS Specification	UL 467 Listed
UL File Number	E34440