


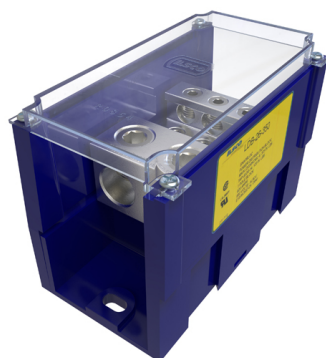

**SKU:** LDB-26-350

**UPC:** 0783669595307

**Features & Benefits:**

**Description:** Snapbloc Power Distribution Block, Modular Design, Dual Rated, Line Conductor Range 350-6, Load Range 2/0-14, 2 Ports Per Pole Line Side, 6 Ports Per Pole Load Side, 1 Pole, UL, CSA, Includes Cover

## Specs

### Additional Class Attributes

|                                    |            |
|------------------------------------|------------|
| Block Size                         | NA         |
| Connection                         | Mechanical |
| Mounting Hole Type                 | Thru       |
| Number of Conductors               | 8          |
| Number of Poles                    | 1          |
| Number of Ports Per Pole Primary   | 2          |
| Number of Ports Per Pole Secondary | 6          |
| Number of Ports / Wireways         | 8          |

### Dimensions

|                             |              |
|-----------------------------|--------------|
| Drive Size Main             | 3/8          |
| Drive Size Tap              | 3/16         |
| Drive Type Main             | Internal Hex |
| Drive Type Tap              | Internal Hex |
| Height (IN)                 | 3.925        |
| Height BX (IN)              | 3.75         |
| Height (mm)                 | 99.695       |
| Length (IN)                 | 5.5          |
| Length (mm)                 | 139.7        |
| Mounting Hole Diameter (IN) | 0.28         |
| Mounting Hole Diameter (mm) | 7.112        |
| Mounting Hole Spacing (IN)  | 4.75         |
| Mounting Hole Spacing (mm)  | 120.65       |
| Weight (LB)                 | 1.88         |
| Weight BX (LB)              | 2.0751       |
| Width (IN)                  | 3.055        |
| Width BX (IN)               | 6            |
| Width (mm)                  | 77.597       |

### Material and Finish

|                                |               |
|--------------------------------|---------------|
| Conductor Material             | Aluminum      |
| Connector Finish               | Tin           |
| Enclosure Material             | Thermoplastic |
| Insulation Material            | Aluminum      |
| Wire Binding Hardware Finish   | Tin           |
| Wire Binding Hardware Material | Aluminum      |

## Bolt and Screw Sizes

|                                        |     |
|----------------------------------------|-----|
| Mounting Bolt/Stud Size                | 1/4 |
| Number of Wire Binding Screws per Port | 1   |
| Wire Binding Screw Size                | 3/4 |
| Wire Binding Torque                    | 120 |

## General

|                             |                |
|-----------------------------|----------------|
| Bag Quantity                | 1              |
| Carton Quantity Description | STD PACK QTY 1 |
| Dual Rated                  | Yes            |
| NEMA Code                   | S-588-4        |
| UPC Code                    | 78366959530    |

## Testing Standards

|                          |                                                                                                            |
|--------------------------|------------------------------------------------------------------------------------------------------------|
| CSA File Number          | LR-29601                                                                                                   |
| CSA Standard             | C22.2 No. 65-03                                                                                            |
| Prop65 Compliance        | WARNING: Cancer and Reproductive Harm - <a href="http://www.P65warnings.ca.gov">www.P65warnings.ca.gov</a> |
| RUS Listed               | No                                                                                                         |
| UL Control Number        | NA                                                                                                         |
| UL / CULUS Specification | UL 1059 Recognized                                                                                         |
| UL File Number           | E84782                                                                                                     |

## Color

|       |      |
|-------|------|
| Color | Blue |
|-------|------|

## Conductor Ranges

|                                                        |                   |
|--------------------------------------------------------|-------------------|
| Conductor Range AL Solid (Secondary, tap, load)        | 10 Sol - 14 Sol   |
| Conductor Range AL Stranded (Primary, run, main, line) | 350 kcmil - 6 Str |
| Conductor Range AL Stranded (Secondary, tap, load)     | 2/0 Str - 14 Str  |
| Conductor Range CU Solid (Primary, run, main, line)    | NA                |
| Conductor Range CU Solid (Secondary, tap, load)        | 10 Sol - 14 Sol   |
| Conductor Range CU Stranded (Primary, run, main, line) | 350 kcmil - 6 Str |
| Conductor Range CU Stranded (Secondary, tap, load)     | 2/0 Str - 14 Str  |
| Conductor Range AL Solid (Primary, run, main, line)    | NA                |

## Additional Technical Specifications

|                                                         |          |
|---------------------------------------------------------|----------|
| Connector Amperage Rating CU (Derated where applicable) | 620 Amps |
| Conductor Type                                          | Stranded |

## Voltage

|                |       |
|----------------|-------|
| Voltage Rating | 600 V |
|----------------|-------|

## Environment and Temperature

|                     |      |
|---------------------|------|
| Flammability Rating | NA   |
| Temperature Rating  | 90°C |