

C

Iberville® - Commercial grade fittings



—
C

Iberville - Commercial grade fittings



Table of contents

Section C

Nonmetallic sheathed cable fittings	C4
Armoured cable/flexible conduit fittings	C7
Service entrance cable fittings	C12
Nonmetallic liquidtight conduit fittings	C13
Liquidtight conduit fittings	C14
Flexible cord fittings	C16
EMT fittings	C18
Rigid conduit fittings	C26
Roughing-in accessories	C34
Grounding accessories	C35
Specification guide	C39
Imperial dimensions	C41
Teck cable specifications	C42
AMC series fittings	C44
Non-watertight fittings	C50

Nonmetallic sheathed cable fittings



		Trade size (in.)	Clamping range (in.)		Suggested application
Cat. no.			Min.	Max.	NMD90 (loomex)
One-screw fittings (zinc alloy)					
	L-16	3⁄8	0.12	0.63	14⁄2, 10⁄2, 14⁄3, 10⁄3
	CI70	3⁄8	0.13	0.70	14⁄2, 12⁄2, 10⁄2, 14⁄3, 10⁄3
	CI71	1⁄2	0.33	0.95	10⁄2, 6⁄2, 12⁄3, 6⁄3
	CI72	3⁄4	0.60	1.15	4⁄2-3⁄2; 4⁄3-3⁄3
	CI73	1	0.93	1.47	2⁄2; 2⁄3
Two-screw fittings (zinc alloy)					
	CI804	3⁄8	0.18	0.64	14⁄2-10⁄2; 2# 14⁄2 and 2# 12⁄2
	CI806	3⁄4	0.41	0.82	8⁄2-6⁄3
	CI808	1	0.50	1.04	4⁄2-2⁄2; 8⁄3-4⁄3
	CI810	1 1⁄4	0.56	1.06	4⁄2-2⁄2; 8⁄3-4⁄3
	CI812	1 1⁄2	0.63	1.60	4⁄2-2⁄2; 8⁄3-2⁄3
	CI816	2	0.86	2.06	3⁄2-2⁄2; 6⁄3-2⁄3
	CI808 / CI816				
Two-screw fittings (steel)					
	CI2060	3⁄8	0.11	0.60	14⁄2-10⁄2; 14⁄3-10⁄3
	CI2061	3⁄4	0.15	0.90	10⁄2-6⁄2; 10⁄3-6⁄3
One-screw fittings (zinc alloy)					
	CI2163	3⁄8	0.35	0.61	10⁄3

CI2060 / CI2061

This product does not have a cast locknut

CI2163

Zinc die cast locknut

See specification guide section for dimensions (pages 39-40).

All NMD90 fittings are also suitable for NMWU90 of equivalent diameters, in dry locations. **NOTE:** $\frac{3}{8}$ in. trade size connectors require a $\frac{1}{2}$ in. knockout

Technical improvements are constantly taking place in the electrical industry. Cable manufacturers are changing their products from time to time. Accordingly, it is strongly suggested that you verify the cable size with the cable manufacturer prior to selecting a fitting.

Nonmetallic sheathed cable fittings



	Cat. no.	Trade size (in.)	Clamping range (in.)		Suggested application
			Min.	Max.	NMD90 (loomex)
One-screw fittings (aluminum)					
	CI2166	½	0.50	0.90	8/3–6/3
	CI2167	¾	0.71	1.10	6/3–4/3
Zinc die cast locknut					
Duplex fittings (zinc alloy) One-screw					
	CI2175	⅜	0.15	0.65	14/2–10/2; 14/3–10/3
Zinc die cast locknut					
Nonmetallic fittings					
	CI3360	½	0.30	0.60	14/2–10/2; 14/3–10/3 2 cables: 14/2–12/2
	CI4004 [†]	½	0.21	0.42	14/2–12/2–10/2– 14/3–12/3–10/3
	W100LX-D [†]	½	0.21	0.42	2 cables: 2 x 14/2–2 x 12/2 1 x 14/2 + 1 x 12/2
	CI4006 ^{*†}	¾	0.22	0.65	12/2–10/2–8/2–6/2–14/3– 12/3–10/3–8/3–6/3
	W101LX ^{*†}	¾	0.22	0.65	2 cables: 2 x 12/2–2 x 10/2 1 x 12/2 + 1 x 10/2
One-screw fittings (steel)					
	CI4040	⅜	0.19	0.57	14/2–10/2; 14/3–10/3 2 cables: 14/2
	CI9049	⅜	0.13	0.37	14/2–10/2; 14/3–12/3
					
CI9049					

* For a complete catalogue number add, suffix JAR 40, JAR 80 or JAR200 according to the desired quantity (i.e.: W101LX-JAR40, W101LX-JAR80 or W101LX-JAR200).

† UL Listed

See specification guide section for dimensions (pages 39–40).

All NMD90 fittings are also suitable for NMWU90 of equivalent diameters, in dry locations. **NOTE:** 3/8 in. trade size connectors require a 1/2 in. knockout

Technical improvements are constantly taking place in the electrical industry. Cable manufacturers are changing their products from time to time. Accordingly, it is strongly suggested that you verify the cable size with the cable manufacturer prior to selecting a fitting.

Nonmetallic sheathed cable

Accessories



		Dimensions (in.)		Hole	Suggested application
Cat. no.		H	W	size (in.)	NMD90 (loomex)
Cable straps (aluminum)					
  	CI10 / CI11	0.44	0.63	3/16	14/3-12/3
	CI1	0.50	0.56	3/16	10/3
	CI1-C	0.50	0.50	3/16	14/2-12/2; 14/3-12/3
	CI2	0.50	0.63	3/16	14/3-10/3
	CI3	0.57	0.68	3/16	14/3-10/3
	CI4	0.81	1.06	3/16	4/3
	CI5	1.06	1.25	7/32	3/3-2/3
	CI10	0.19	0.44	3/16	14/2
	CI11	0.31	0.56	3/16	12/2-10/2
	Nailing straps (zinc-plated steel)				
	CI1544	0.25	0.51	–	14/2-12/2
Nailing straps (polyethylene)					
	CI1544-P**	0.25	0.49	–	14/2-12/2
	CI1546-P**	0.25	0.75	–	14/2-8/2
Cable staples (galvanized steel)					
	CIS-1	0.25	0.48	–	14/2-12/2
	CIS-2	0.44	0.54	–	2 cables 14/2; 2 cables 12/2; 14/2-14/3-12/2-12/3-10/2-10/3
	CIS-3*	0.49	0.70	–	10/2-8/2; 14/3-10/3
	CIS-4*	0.76	0.86	–	14/2-8/2, 14/3-8/3, 14/4-10/4
Double cable staples (galvanized steel)					
	CIS-1X2	0.25	0.48 x 2	–	14/2-12/2
	CIS-1X2-FP3	0.25	0.48 x 2	–	14/2-12/2
	CIS-1X2-FP5	0.25	0.48 x 2	–	14/2-12/2

*Also suitable for application AC90(BX). See page 10.
Also suitable for NMWU90 of equivalent diameters.

** cULus Listed



		Cat. no.	Suggested application
Protector plates (galvanized steel)			
      		CI66	For wood stud
		CI66-FPP	For forenze
		CI66-PPH	For exterior wall, in front of wood stud
		CI66-SS	For metal stud
		CI66-T	For wood stud (stainless steel)
		CI66-XL	For wood stud (stainless steel)
		CI66-XL-2	For wood stud (stainless steel)

Armoured cable/flexible conduit

Fittings



	Cat. no.	Trade size (in.)	Clamping range (in.)		Suggested application	Flex. conduit
			Min.	Max.	AC90 (BX)	
One-screw fittings (zinc alloy)						
  	L-16	$\frac{3}{8}$	0.12	0.63	14/2-10/2-14/3-10/3-14/4-10/4	$\frac{5}{16}$ - $\frac{3}{8}$
	CI70	$\frac{3}{8}$	0.13	0.70	14/2, 12/2, 10/2, 14/3, 12/3, 10/3, 14/4	$\frac{3}{8}$
	CI71	$\frac{1}{2}$	0.33	0.95	14/2-10/2; 14/3-10/3; 14/4-8/4	$\frac{5}{16}$, $\frac{3}{8}$, $\frac{1}{2}$
	CI72	$\frac{3}{4}$	0.60	1.15	6/2; 8/3-3/3; 8/4-3/4	$\frac{1}{2}$, $\frac{3}{4}$
	CI73	1	0.93	1.47	3/3-3/0/3; 2/4-1/4	$\frac{3}{4}$, 1
Duplex fitting (zinc alloy)						
 	CI2175	$\frac{3}{8}$	0.15	0.65	14/2-10/2; 14/3-10/3; 14/4-12/4	$\frac{3}{8}$
	CI2275*	$\frac{3}{8}$	0.45	0.58	14/2-10/2; 14/3-10/3; 14/4-12/4	$\frac{3}{8}$
90° fittings (zinc alloy)						
 	CI2210	$\frac{3}{8}$	0.40	0.63	14/2-10/2; 14/3-10/3 14/4-12/4	$\frac{3}{8}$
	CI2211	$\frac{1}{2}$	0.65	0.97	8/2; 8/3; 10/4	$\frac{1}{2}$
	CI2214	$\frac{3}{4}$	0.77	1.12	1/0/1-4/0/1; 6/2-4/2; 8/3-3/3; 8/4-6/4	$\frac{3}{4}$
	CI2216	1	1.06	1.40	4/0/1-350/1; 2/2; 4/3-2/3; 6/4-4/4	1
	CI2218	$1\frac{1}{4}$	1.34	1.65	500/1-750/1; 1/3-3/0/3; 1/4-1/0/4	$1\frac{1}{4}$
	CI2234	$1\frac{1}{2}$	1.70	2.15	600/1-1,000/1; 2/0/3; 1/4-3/0/4	$1\frac{1}{2}$
	CI2236	2	1.51	2.47	600/1-1,000/1; 2/0/3-400/3; 1/4-4/0/4	$1\frac{1}{2}$ -2
	CI2238	$2\frac{1}{2}$	2.50	3.08	600/3-750/3	$2\frac{1}{2}$
	CI2240	3	2.95	3.55	1,000/3	3
	CI4090	4	4.17	4.62	—	4

Also suitable for ACWU90 (of equivalent diameters) in dry locations. A non-ferrous connector and locknut must be used to terminate a single conductor cable when nominal current exceeds 200 A.

* Suitable for AC90 and ACG90: Clamping range for AC90 is 0.45–0.58 inch and for ACG90 is 0.47–0.57 inch.

NOTE: $\frac{3}{8}$ in. trade size fittings require a $\frac{1}{2}$ in. knockout

Technical improvements are constantly taking place in the electrical industry. Cable manufacturers are changing their products from time to time. Accordingly, it is strongly suggested that you verify the cable size with the cable manufacturer prior to selecting a fitting.

See specification guide section for dimensions (pages 39–40).

Armoured cable/flexible conduit

Fittings



	Cat. no.	Trade	Clamping range (in.)		Suggested application	Flex. conduit
		size (in.)	Min.	Max.	AC90 (BX)	
 CI2104 / CI2124 Zinc or aluminium die cast locknut	Two-screw fittings (cast aluminium body and clamp)					
	CI2104	½	0.45	0.59	14/2-10/2; 14/3-10/3; 14/4-12/4 ACWU90: 10/2; 12/3-10/3; 12/4; 12/5	⅝ ₁₆
	CI2106	¾	0.55	0.78	10/2-8/2; 10/3-8/3; 12/4-10/4 ACWU90: 3/1-2/1; 8/2; 10/3-8/3; 10/4; 12/5	⅝-⅞ ₁₆
	CI2108	1	0.69	1.01	1/0/1-2/0/1; 8/2-6/2; 8/3-6/3; 8/4 ACWU90: 3/1-3/0/1; 6/2-4/2; 8/3-4/3; 8/4-6/4	½
	CI2110	1¼	0.84	1.33	1/0/1-350/1; 6/2-2/2; 6/3-2/3; 8/4-4/4 ACWU90: 1/0/1-400/1 6/2-1/2; 6/3-2/3; 8/4-2/4	¾
	CI2112	1½	1.06	1.57	4/0/1-600/1; 2/2-1/2; 4/3-2/0/3; 4/4-1/4 ACWU90: 4/0/1-600/1; 1/0/2-3/0/2; 4/3-2/0/3; 6/4-1/0/4	1
	CI2116	2	1.38	2.06	500/1-1000/1; 1/0/3-300/3; 1/4-3/0/4 ACWU90: 500/1-1000/1; 2/0/2-350/2; 1/0/3-300/3; 1/4-4/0/4	1¼, 1½
	CI2120	2½	1.95	2.47	400/3-500/3 300/4-500/4	1½, 2
	CI2124	3	2.25	3.57	500/4-750/4	2, 2½
	One-screw fitting (zinc alloy)					
 CI2163 Zinc die cast locknut	CI2163	⅝	0.35	0.61	14/2-10/2; 14/3-10/3; 14/4-12/4	⅝
	One-screw fittings (aluminum)					
 CI2166 / CI2172 Zinc die cast locknut	CI2166	½	0.50	0.90	12/2-8/2; 12/3-8/3; 14/4-10/4	½
	CI2167	¾	0.71	1.10	1/0/1-4/0/1; 6/2-4/2; 8/3-3/3; 8/4-6/4	¾
	CI2169	1	1.16	1.40	250/1-300/1; 2/3; 4/4	1
	CI2170	1¼	1.32	1.77	400/1-600/1; 1/2; 1/3-2/0/3; 1/4	1¼
	CI2171	1½	1.77	2.05	1000/1; 4/0/3 ACWU90: 1000/1; 4/0/3; 3/0/4	1½
	CI2172	2	2.10	2.54	350/3-400/3 ACWU90: 1500/1; 500/2; 350/3-400/3; 250/4-300/4	2

Also suitable for ACWU90 (of equivalent diameters) in dry locations. CI2104/CI2116 fittings may also be used for RA90 cables of equivalent diameters. A non-ferrous connector and locknut must be used to terminate a single conductor cable when nominal current exceeds 200 A

NOTE: ⅝ in. trade size fitting require a ½ in. knockout

Technical improvements are constantly taking place in the electrical industry. Cable manufacturers are changing their products from time to time. Accordingly, it is strongly suggested that you verify the cable size with the cable manufacturer prior to selecting a fitting.

See specification guide section for dimensions (pages 39-40).

Armoured cable/flexible conduit

Fittings



			Clamping range (in.)		Suggested application	Flex.
	Cat. no.	Trade size (in.)	Min.	Max.	AC90 (BX)	conduit
	Two-screw fittings (zinc alloy)					
	CI2173	2½	2.05	3.07	250/3–600/3; 250/4–300/4 ACWU90: 1500/1; 500/2	2, 2½
	CI2174	3	2.25	3.57	350/3–600/3; 4/0/4–300/4 ACWU90: 1500/1; 500/2	2½, 3

CI2173 / CI2174

Zinc die cast locknut

Two-screw fitting (aluminum)						
	CI4000	4	4.40	4.55	—	4

CI4000

Aluminum locknut and plastic bushing

See specification guide section for dimensions (pages 39–40).



	Cat. no.	Trade size (in.)	Description
Cable Lok one-screw fittings (galvanized steel)			
	XC-730 *	½	Single connector
	XC-731	½	Single connector
	XC-732	¾	Single connector
	XC-7300	½	Duplex connector

XC-730

* Not CSA certified

	XC-730 ½ in. single	XC-731 ½ in. single	XC-732 ¾ in. single	XC-7300 ½ in. duplex
Conduit / cable selection guide				
Armoured cable	14/2; 14/3; 14/4 12/2; 12/3; 12/4	14/2; 14/3; 14/4 12/2; 12/3; 12/4	10/4 8/2; 8/3 6/2	14/2; 14/3; 14/4 12/2; 12/3; 12/4
Flexible conduit	¾	—	½	¾



	Cat. no.	Description
Snap-in fitting for MC cable – steel		
	XC-130	Steel snap-in fitting for MC cable (14/2 + G to 10/3 + G)

XC-130

Armoured cable/flexible conduit

Accessories



		Trade size (in.)		Clamping range (in.)	
		EMT	Flex.	Min.	Max.
EMT / flex. couplings (zinc alloy)					
 CI5153	CI5153	1/2	3/8	0.17	0.63
	CI5154	1/2	1/2	0.75	0.95
	TX-212	3/4	3/4	0.78	1.20



	Cat. no.	Dimensions (in.)		Hole size (in.)	Suggested application	Flex. conduit (in.)
		H	W		AC90 (BX)	
 CI0 / CI5	Cable straps (aluminum)					
	CI0	0.44	0.63	3/16	14/2	–
	CI1	0.50	0.56	3/16	12/2–10/2; 14/3–12/3; 14/4	5/16
	CI2	0.50	0.63	3/16	10/3; 12/4	3/8
	CI3	0.57	0.68	3/16	10/2; 10/3; 12/4	–
	CI4	0.81	1.06	3/16	6/2; 6/3; 8/4	1/2
	CI5	1.06	1.25	7/32	4/2–2/2; 4/3–2/3; 6/4–4/4	3/4
 CIS-3 / CIS-4	Cable staples (galvanized steel)					
	CIS-3	0.49	0.70	–	14/2–12/2; 14/3–12/3	5/16
	CIS-4	0.76	0.86	–	14/2–8/2; 14/3–8/3; 14/4–10/4	3/8, 7/16



	Cat. no.	Trade size (in.)	Max. flex. conduit dia. (in.)	Hole size (in.)
Flexible conduit strap (galvanized steel)				
 CI38	CI38	3⁄8	0.61	3⁄16



	Cat. no.	Max. flex. conduit dia. (in.)	Hole size (in.)
	One-hole double-sided strap (galvanized steel)		
	CI7538*	1.05	3/16

* Any combination of 3/8 in., 1/2 in. and 3/4 in. EMT, rigid conduit, flexible conduit or teck cables

Armoured cable/flexible conduit

Accessories



			Cat. no.	Application
Protector plates (galvanized steel)				
 CI66  CI66-FPP  CI66-PPH  CI66-T  CI66-SS  CI66-XL-2  CI66-XL			CI66	For wood stud
			CI66-FPP	For forenze
			CI66-PPH	For exterior wall, in front of wood stud
			CI66-SS	For metal stud
			CI66-T	For wood stud
			CI66-XL	For wood stud
			CI66-XL-2	For wood stud

As required by CEC rules 12-516 and 12-616



	Cat. no.	AC cable size	Size	Pkg. qty.
 IT-100-SC	Anti-short bushings			
	IT-100-SC	14/2, 14/3, 12/2	0	35
	IT-101	14/4, 12/3, 6/1, 4/1	1	35
	IT-102	12/4, 10/2, 10/3, 2/1	2	35
	IT-103	10/4, 8/2, 8/3, 1/1	3	20
	IT-104	8/4, 6/2, 6/3, 4/2, 4/3, 6/4	4	16

Service entrance cable fittings

Connectors and entrance heads




			Clamping range (in.)		Throat (in.)		
			Min.	Max.			
Two-screw fittings (zinc alloy)							
 CI808 / CI816 Zinc die cast locknut	 CI806 Zinc die cast locknut	 CI804	CI804	3/8	0.18	0.64	0.64
			CI806	3/4	0.41	0.82	0.83
			CI808	1	0.50	1.04	1.05
			CI810	1 1/4	0.56	1.06	1.37
			CI812	1 1/2	0.63	1.60	1.81
			CI816	2	0.86	2.06	2.05

NOTE : 3/8 in. trade size connectors require a 1/2 in. knockout.



	Cat. no.	Trade size (in.)
Service entrance heads (cast aluminum) rigid conduit		
 CIEFA-1/2 / CIEFA-4	CIEFA-1/2	1/2
	CIEFA-3/4	3/4
	CIEFA-1	1
	CIEFA-1-1/4	1 1/4
	CIEFA-1-1/2	1 1/2
	CIEFA-2	2
	CIEFA-2-1/2	2 1/2
	CIEFA-3	3
	CIEFA-3-1/2	3 1/2
	CIEFA-4	4
Service entrance heads (cast aluminum) EMT		
 CIEFSA-1/2 / CIEFSA-4	CIEFSA-1/2	1/2
	CIEFSA-3/4	3/4
	CIEFSA-1	1
	CIEFSA-1-1/4	1 1/4
	CIEFSA-1-1/2	1 1/2
	CIEFSA-2	2
	CIEFSA-2-1/2	2 1/2
	CIEFSA-3	3
	CIEFSA-3-1/2	3 1/2
	CIEFSA-4	4

Service entrance head KO configuration

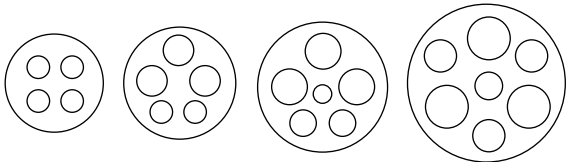Diagrams	Trade size (in.)	KO dimensions (in.)		
		Small	Large	Center
	1/2	0.312	—	—
	3/4	0.375	0.400	—
	1	0.438	0.500	—
	1 1/4	0.438	0.625	—
	1 1/2	0.610	0.750	0.400
	2	0.750	1.000	0.525
	2 1/2	0.875	1.300	1.000
	3	1.125	1.750	1.125
	3 1/2	1.125	1.750	1.125
	4	1.125	1.750	1.125

Nonmetallic liquidtight conduit fittings

Time saving and cost effective.

Nonmetallic liquidtight conduit may be used with nonmetallic, malleable iron or zinc liquidtight fittings, offering a combination of benefits not available from traditional metal liquidtight conduit.

Features

- Chemical resistant
- Corrosion-free
- No metal fatigue or jacket separation
- Crush and abrasive resistant
- Insulated for safety
- Extra rugged and flexible
- Temperature range: -18 °C to 75 °C (0 °F to 167 °F)
- Cold impact resistant
- Lightweight
- Cuts easily
- Prevents hand injuries
- Marked at 1-foot intervals for easy measurement and cutting

Applications

- Electrical motors and controls
- Plating applications
- Water treatment
- Marine equipment
- Heating and refrigeration
- Computer equipment
- Robotics
- Machine tools
- Chemical processing
- Printing equipment
- Fiber optics
- Pumps and related equipment
- Air conditioning
- Etc.

Nonmetallic liquidtight conduit fittings





	Cat. no.	Trade size (in.)	KO size (in.)	Throat (in.)
 CILTCC-03 / CILTCC-08 Supplied with locknut	Straight			
	CILTCC-03	3/8	1/2	0.54
	CILTCC-04	1/2	1/2	0.54
	CILTCC-06	3/4	3/4	0.74
	CILTCC-08	1	1	0.98
 CILTCC-903 / CILTCC-908 Supplied with locknut	90°			
	CILTCC-903	3/8	1/2	0.54
	CILTCC-904	1/2	1/2	0.54
	CILTCC-906	3/4	3/4	0.74
	CILTCC-908	1	1	0.98

Liquidtight conduit fittings

Malleable iron fittings

- Heavy-duty malleable iron
- Zinc electroplated for corrosion resistance
- Tapered threaded hub complete with flange gasket and steel locknut
- Temperature range: -25 °C to 90 °C



		Trade		Dimensions (in.)			
		Cat. no.	size (in.)	KO size (in.)			
				A	B		
					C		
Straight liquidtight fittings (steel)							
 CI6103 (-IT) / CI6116 (-IT) IT: with insulated throat		CI6103	3/8	1/2	1 1/16	9/16	1 5/8
		CI6104	1/2	1/2	1 3/16	9/16	1 3/4
		CI6106	3/4	3/4	1 7/16	9/16	1 5/16
		CI6108	1	1	1 11/16	1 1/16	2 3/16
		CI6110	1 1/4	1 1/4	2 1/8	1 1/16	2 3/8
		CI6112	1 1/2	1 1/2	2 3/8	1 1/16	2 9/16
		CI6116	2	2	2 15/16	1 3/16	2 3/4
Straight liquidtight fittings – insulated throat (malleable iron)							
		CI6103-IT	3/8	1/2	1 1/16	9/16	1 5/8
		CI6104-IT	1/2	1/2	1 3/16	9/16	1 3/4
		CI6106-IT	3/4	3/4	1 7/16	9/16	1 5/16
		CI6108-IT	1	1	1 11/16	1 1/16	2 3/16
		CI6110-IT	1 1/4	1 1/4	2 1/8	1 1/16	2 3/8
		CI6112-IT	1 1/2	1 1/2	2 3/8	1 1/16	2 9/16
		CI6116-IT	2	2	2 15/16	1 3/16	2 3/4
90° liquidtight fittings (malleable iron)							
 CI6303 (-IT) / CI6316 (-IT) IT: with insulated throat		CI6303	3/8	1/2	1 1/16	9/16	2
		CI6304	1/2	1/2	1 3/16	9/16	2 1/16
		CI6306	3/4	3/4	1 7/16	9/16	2 1/2
		CI6308	1	1	1 11/16	1 1/16	2 15/16
		CI6310	1 1/4	1 1/4	2 1/8	1 1/16	3 3/16
		CI6312	1 1/2	1 1/2	2 3/8	1 1/16	3 1/2
		CI6316	2	2	2 15/16	1 3/16	4 5/16
90° liquidtight fittings – insulated throat (malleable iron)							
		CI6303-IT	3/8	1/2	1 1/16	9/16	2
		CI6304-IT	1/2	1/2	1 3/16	9/16	2 1/16
		CI6306-IT	3/4	3/4	1 7/16	9/16	2 1/2
		CI6308-IT	1	1	1 11/16	1 1/16	2 15/16
		CI6310-IT	1 1/4	1 1/4	2 1/8	1 1/16	3 3/16
		CI6312-IT	1 1/2	1 1/2	2 3/8	1 1/16	3 1/2
		CI6316-IT	2	2	2 15/16	1 3/16	4 5/16


Liquidtight conduit fittings

Zinc alloy fittings



CI6603 (-IT) / CI6632 (-IT)

IT: with insulated throat



Cat. no.	Trade size (in.)	KO size (in.)	Dimensions (in.)		
			A	B	C
Straight liquidtight fittings (zinc alloy)					
CI6603	3⁄8	1⁄2	1.58	0.53	1.18
CI6604	1⁄2	1⁄2	1.52	0.53	1.29
CI6606	3⁄4	3⁄4	1.69	0.53	1.57
CI6608	1	1	2.06	0.58	1.81
CI6610	1 1⁄4	1 1⁄4	2.06	0.61	2.18
CI6612	1 1⁄2	1 1⁄2	2.09	0.63	2.51
CI6616	2	2	2.15	0.63	3.03
CI6620	2 1⁄2	2 1⁄2	3.54	1.02	3.68
CI6624	3	3	4.05	1.07	4.38
CI6632	4	4	4.99	1.15	5.54


Straight liquidtight fittings – insulated throat (zinc alloy)

CI6603-IT	3/8	1/2	1.66	0.63	1.18
CI6604-IT	1/2	1/2	1.62	0.63	1.29
CI6606-IT	3/4	3/4	1.79	0.63	1.57
CI6608-IT	1	1	2.16	0.68	1.81
CI6610-IT	1 1/4	1 1/4	2.16	0.71	2.18
CI6612-IT	1 1/2	1 1/2	2.19	0.73	2.51
CI6616-IT	2	2	2.25	0.73	3.03
CI6620-IT	2 1/2	2 1/2	3.64	1.12	3.68
CI6624-IT	3	3	4.15	1.17	4.38
CI6632-IT	4	4	5.09	1.25	5.54



CI6703 (-IT) / CI6716 (-IT)

IT: with insulated throat



90° liquidtight fittings (zinc alloy)

CI6703	3/8	1/2	2.11	0.53	2.53
CI6704	1/2	1/2	2.24	0.53	2.46
CI6706	3/4	3/4	2.47	0.55	2.79
CI6708	1	1	3.46	0.58	3.86
CI6710	1 1/4	1 1/4	3.37	0.67	3.99
CI6712	1 1/2	1 1/2	4.28	0.61	5.04
CI6716	2	2	4.21	0.71	5.06
LT-297	2 1/2	2 1/2	4.32	0.88	3.65
LT-298	3	3	4.81	0.88	4.32
LT-2910	4	4	5.32	0.88	5.32

90° liquidtight fittings – insulated throat (zinc alloy)

CI6703-IT	3/8	1/2	2.27	0.63	2.53
CI6704-IT	1/2	1/2	2.24	0.63	2.46
CI6706-IT	3/4	3/4	2.54	0.65	2.79
CI6708-IT	1	1	3.25	0.68	3.86
CI6710-IT	1 1/4	1 1/4	3.50	0.77	3.99
CI6712-IT	1 1/2	1 1/2	4.30	0.71	5.04
CI6716-IT	2	2	5.16	0.81	5.06


Tapered threaded hub complete with zinc die cast locknut

Flexible cord

Steel fittings


- Made of corrosion-resistant, zinc-plated machined steel
- Raintight and strain relieving
- Neoprene rubber bushing ensures a permanent raintight seal around the cord outer jacket.
- Galvanized steel pressure ring prevents distortion of the bushing when subjected to the tightening of the gland nut

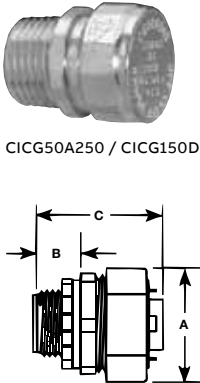

	Cat. no.	Trade	KO	Cable dimensions (in.)		Throat (in.)	Dimensions (in.)		
		size (in.)	size (in.)	Min.	Max.		A	B	C
 CICG50A250 / CICG150D1375	Cord grip fittings (machined steel / zinc plated)								
	CICG50A250	1/2	1/2	0.150	0.250	0.640	1 1/32	13/16	1 5/16
	CICG50A350	1/2	1/2	0.250	0.350	0.640	1 1/32	13/16	1 5/16
	CICG50A450	1/2	1/2	0.350	0.460	0.640	1 1/32	13/16	1 5/16
	CICG50A560	1/2	1/2	0.450	0.560	0.640	1 1/32	13/16	1 5/16
	CICG50A650	1/2	1/2	0.560	0.650	0.640	1 1/32	13/16	1 5/16
	CICG75A250	3/4	3/4	0.150	0.250	0.687	1 1/32	13/16	1 5/16
	CICG75A350	3/4	3/4	0.250	0.350	0.687	1 1/32	13/16	1 5/16
	CICG75A450	3/4	3/4	0.350	0.460	0.687	1 1/32	13/16	1 5/16
	CICG75A560	3/4	3/4	0.450	0.560	0.687	1 1/32	13/16	1 5/16
	CICG75A650	3/4	3/4	0.550	0.650	0.687	1 1/32	13/16	1 5/16
	CICG75B750	3/4	3/4	0.650	0.750	0.845	1 1/4	1 1/32	1 9/16
	CICG75B850	3/4	3/4	0.750	0.850	0.845	1 1/4	1 1/32	1 9/16
	CICG100B560	1	1	0.450	0.560	0.937	1 1/4	1 1/8	1 3/4
	CICG100B650	1	1	0.560	0.650	0.937	1 1/4	1 1/8	1 3/4
	CICG100B750	1	1	0.650	0.750	0.937	1 1/4	1 1/8	1 3/4
	CICG100B850	1	1	0.750	0.850	0.937	1 1/4	1 1/8	1 3/4
	CICG100C950	1	1	0.850	0.950	1.050	1 1/2	1 3/16	1 7/8
	CICG100C1050	1	1	0.950	1.050	1.050	1 1/2	1 3/16	1 7/8
	CICG125C850	1 1/4	1 1/4	0.750	0.850	1.187	1 1/2	1 1/4	1 5/16
	CICG125C950	1 1/4	1 1/4	0.850	0.950	1.187	1 1/2	1 1/4	1 5/16
	CICG125D1050	1 1/4	1 1/4	0.950	1.050	1.375	2	1 1/4	1 5/16
	CICG125D1150	1 1/4	1 1/4	1.050	1.150	1.375	2	1 1/4	1 5/16
	CICG125D1250	1 1/4	1 1/4	1.150	1.250	1.375	2	1 1/4	1 5/16
	CICG125D1375	1 1/4	1 1/4	1.250	1.375	1.375	2	1 1/4	1 5/16
	CICG150D1050	1 1/2	1 1/2	0.950	1.050	1.375	2	1 5/16	2
	CICG150D1150	1 1/2	1 1/2	1.050	1.150	1.375	2	1 5/16	2
	CICG150D1250	1 1/2	1 1/2	1.150	1.250	1.375	2	1 5/16	2
	CICG150D1375	1 1/2	1 1/2	1.250	1.375	1.375	2	1 5/16	2



CICG50A250 / CICG150D1375




90° cord grip fittings (malleable iron)

CICG9050-A250	1/2	1/2	0.150	0.250	0.609	1 1/8	9/16	1 21/32
CICG9050-A350	1/2	1/2	0.250	0.350	0.609	1 1/8	9/16	1 21/32
CICG9050-A450	1/2	1/2	0.350	0.450	0.609	1 1/8	9/16	1 21/32
CICG9050-A560	1/2	1/2	0.450	0.560	0.609	1 1/8	9/16	1 21/32
CICG9050-A650	1/2	1/2	0.550	0.650	0.609	1 1/8	9/16	1 21/32
CICG9075-A250	3/4	3/4	0.150	0.250	0.813	1 3/8	19/32	1 25/32
CICG9075-A350	3/4	3/4	0.250	0.350	0.813	1 3/8	19/32	1 25/32
CICG9075-A450	3/4	3/4	0.350	0.450	0.813	1 3/8	19/32	1 25/32
CICG9075-A560	3/4	3/4	0.450	0.560	0.813	1 3/8	19/32	1 25/32
CICG9075-A650	3/4	3/4	0.550	0.650	0.813	1 3/8	19/32	1 25/32
CICG9075-B750	3/4	3/4	0.650	0.750	0.813	1 3/8	19/32	1 25/32
CICG9075-B850	3/4	3/4	0.750	0.850	0.813	1 3/8	19/32	1 25/32



CICG9050-A250 / CICG9075-B850





Flexible cord

Nonmetallic fittings

- Liquidtight and strain relieving (IP68)
- Corrosion-resistant polyamide (nylon)
- Superior anti-vibration protection
- Acme threads on body prevent skipping and speed installation
- Indoor or outdoor use
- Quick installation
- Working temperatures:
Static: -40 °C to 115 °C
Dynamic: -20 °C to 100 °C
- Resistant to: Salt water, weak acids, gasoline, alcohol, oil, grease and common solvents



	Cat. no.	Trade	KO	Dia. over cable jacket (in.)		Throat (in.)	Dimensions (in.)		
		size (in.)	size (in.)	Min.	Max.		A	B	C
 	"Skintight" straight cord fittings (nylon)								
	CISLR-9-03*	3/8	3/8	0.069	0.187	0.375	3/4	31/32	17/32
	CISL-9-03*	3/8	3/8	0.115	0.312	0.375	3/4	31/32	17/32
	CISLR-13-04	1/2	1/2	0.170	0.450	0.500	15/16	1 3/32	5/8
	CISL-13-04	1/2	1/2	0.230	0.546	0.500	1 1/16	1 7/32	5/8
	CISLR-21-04	1/2	1/2	0.250	0.485	0.600	1 9/32	1 11/32	5/8
	CISL-21-04	1/2	1/2	0.450	0.709	0.600	1 9/32	1 11/32	5/8
	CISLR-21-06	3/4	3/4	0.250	0.485	0.667	1 5/16	1 11/32	5/8
	CISL-21-06	3/4	3/4	0.450	0.709	0.667	1 5/16	1 11/32	5/8
 	90° "skintight" cord fittings (nylon)								
	CISLFR-9-03*	3/8	3/8	0.065	0.230	0.375	3/4	2 7/16	7/32
	CISLF-9-03*	3/8	3/8	0.105	0.315	0.375	3/4	2 7/16	7/32
	CISLFR-13-04	1/2	1/2	0.095	0.290	0.500	15/16	3 15/32	5/8
	CISLF-13-04	1/2	1/2	0.170	0.450	0.500	15/16	3 15/32	5/8
	CISLFR-21-06	3/4	3/4	0.250	0.490	0.667	1 5/16	4 17/32	5/8
	CISLF-21-06	3/4	3/4	0.435	0.705	0.667	1 5/16	4 17/32	5/8

* UL Recognized



	Cat. no.	Trade size (in.)	KO size (in.)	Clamping range (in.)	
				Min.	Max.
Nonmetallic fittings					
Dry location	CI3360	½	½	0.30	0.60



CI3360

CI3360



Complete with metric locknut. Working temperatures : -30 °C (-22 °F) to 80 °C (176 °F)

	Cat. no.	Trade size (in.)
	Nylon locknuts	
	CI1703-PL*	3/8
	CI1704-PL*	1/2
	CI1706-PL*	3/4
CI1703-PL* / CI1706-PL*		



CI1703-PL* / CI1706-PL*

* Not CSA certified

EMT

Set screw fittings



	Cat. no.		Trade size (in.)
	Regular	Insulated	
EMT set screw fittings (steel)			
	CI5404	CI5404-IT	½
	CI5406	CI5406-IT	¾
	CI5408	CI5408-IT	1
	CI5410	CI5410-IT	1¼
	CI5412	CI5412-IT	1½
	CI5416	CI5416-IT	2
	CI5420	CI5420-IT	2½
	CI5424	CI5424-IT	3
	CI5432	CI5432-IT	4

CI5404 (-IT) /
CI5408 (-IT)

CI5410 (-IT) /
CI5432 (-IT)

Concrete-tight



	Cat. no.		Trade size (in.)
	Regular (zinc)	Insulated (zinc)	
EMT set screw fittings (zinc)			
	CI5004	CI5004-IT	½
	CI5006	CI5006-IT	¾
	CI5008	CI5008-IT	1
	CI5010	CI5010-IT	1¼
	CI5012	CI5012-IT	1½
	CI5016	CI5016-IT	2
	CI5020	CI5020-IT	2½
	CI5024	CI5024-IT	3
	CI5032	CI5032-IT	4

CI5004 (-IT) /
CI5008 (-IT)

CI5010 (-IT) /
CI5016 (-IT)

CI5020 (-IT) /
CI5032 (-IT)

Concrete-tight. Zinc die cast locknut. IT: with insulated throat.



	Cat. no.	Trade size (in.)	Offset (in.)
	EMT set screw offset body fittings (zinc alloy)		
	CI5054	½	¾
	CI5056	¾	¾
	CI5058	1	¾

CI5054 / CI5058

Concrete-tight.



	Cat. no.			Std. pkg. qty.
	Regular	Insulated	Trade size (in.)	
	EMT / fire alarm set screw fittings (red steel)			
	TC121A-FA	TC721A-FA	½	50
TC122A-FA	TC722A-FA	¾	50	
TC123A-FA	TC723A-FA	1	25	



TC121A-FA

EMT

Set screw couplings



		Cat. no.		Trade size (in.)
		Steel	Zinc alloy	
EMT set screw couplings				
	CI5504 / CI5508	CI5504*	CI5104	1/2
		CI5506*	CI5106	3/4
	CI5120 / CI5132	CI5508*	CI5108	1
		CI5510*	CI5110	1 1/4
	CI5104 / CI5116	CI5512*	CI5112	1 1/2
		CI5516*	CI5116	2
	CI5510 / CI5532	CI5520*	CI5120	2 1/2
		CI5524*	CI5124	3
		CI5532*	CI5132	4

* cULus Listed only
Concrete-tight when taped



		Trade size (in.)	
		EMT	Rigid
EMT / rigid couplings (zinc alloy)			
	CI5164 / CI5168	1/2	1/2
		3/4	3/4
		1	1

Concrete-tight



		Trade size (in.)	Std. pkg. qty
		Cat. no.	
EMT / fire alarm set screw couplings (red steel)			
	TK121A-FA	1/2	50
		3/4	50
		1	25

TK121A-FA

EMT

Compression fittings and couplings

- Models from 2½ to 4 in. are also suitable for rigid and IMC conduit



		Cat. no.		Trade size (in.)
		Regular	Insulated	
EMT compression fittings (zinc-plated steel)				
 TC111A	 TC711A	TC111A	TC711A	½
		TC112A	TC712A	¾
		TC113A	TC713A	1
		TC114A*	TC714A	1¼
		TC115A*	TC715A	1½
		TC116A*	TC716A	2
		TC117A	TC717A	2½
		TC118A	TC718A	3
		TC119A	TC719A	3½
		TC1110A	TC7110A	4

UL file no. E-16592. * O-rings are supplied.
Concrete-tight.



		Trade Size (in.)
Cat. no.		
EMT compression couplings (zinc-plated steel)		
 TK111A	TK111A	½
	TK112A	¾
	TK113A	1
	TK114A	1¼
	TK115A	1½
	TK116A	2
	TK117A	2½
	TK118A	3
	TK119A	3½
	TK1110A	4

UL file no. E-16592.
Concrete-tight.



	Cat. no.		Trade size (in.)
	Regular	Insulated	
	EMT compression fittings (zinc alloy)		
 CI5804 (-IT) / CI5832 (-IT) Zinc Die Cast Locknut IT: with insulated throat	CI5804	CI5804-IT	½
	CI5806	CI5806-IT	¾
	CI5808	CI5808-IT	1
	CI5810	CI5810-IT	1¼
	CI5812	CI5812-IT	1½
	CI5816	CI5816-IT	2
	CI5820	CI5820-IT	2½
	CI5824	CI5824-IT	3
	CI5832	CI5832-IT	4

Concrete-tight.



	Cat. no.	Trade size (in.)
	EMT compression couplings (zinc alloy)	
 CI5904 / CI5932	CI5904	½
	CI5906	¾
	CI5908	1
	CI5910	1¼
	CI5912	1½
	CI5916	2
	CI5920	2½
	CI5924	3
	CI5932	4

Concrete-tight.

EMT

Wet-location fittings



CI5620-WL



CI5612-IT-WL



CI5706-WL

Specifications

Material: Steel body and steel locknut

Finish: Electro zinc plated

Liner (insulated fittings only): Nylon

Threads: Hub threads (NPS)

Sealing gasket: Neoprene

Sealing ring: Nylon

Use: Wet locations, concrete-tight

UL Listed raintight (File E-16592)

UL514B / CSAC22.2-No.18.3

NEMA FB-1


NEMA 3R

Wet-location EMT compression fittings



Hub size		Dimensions (in.)			Std. ctn.
Cat. no.	(in.)	A	B	C	
Non-insulated					
CI5604-WL	½	1.22	0.47	1.14	100
CI5606-WL	¾	1.21	0.48	1.38	50
CI5608-WL	1	1.30	0.50	1.67	25
CI5610-WL	1¼	1.50	0.60	2.06	25
CI5612-WL	1½	1.53	0.65	2.27	20
CI5616-WL	2	1.67	0.73	2.77	10
CI5620-WL	2½	2.77	0.87	3.65	5
CI5624-WL	3	2.75	0.87	4.30	5
CI5632-WL	4	3.12	0.92	5.23	5
Insulated					
CI5604-IT-WL	½	1.22	0.54	1.14	100
CI5606-IT-WL	¾	1.21	0.55	1.38	50
CI5608-IT-WL	1	1.30	0.57	1.67	25
CI5610-IT-WL	1¼	1.50	0.69	2.06	25
CI5612-IT-WL	1½	1.53	0.74	2.27	20
CI5616-IT-WL	2	1.67	0.82	2.77	10
CI5620-IT-WL	2½	2.77	0.99	3.65	5
CI5624-IT-WL	3	2.75	0.99	4.30	5
CI5632-IT-WL	4	3.12	1.04	5.23	5

Diagrams




Wet-location EMT compression couplings



Cat. no.	Hub size (in.)	Dimensions (in.)		Std. ctn.
		A	B	
CI5704-WL	½	1.94	1.14	100
CI5706-WL	¾	2.09	1.38	50
CI5708-WL	1	2.31	1.67	25
CI5710-WL	1¼	2.58	2.06	25
CI5712-WL	1½	2.74	2.27	20
CI5716-WL	2	2.83	2.77	10
CI5720-WL	2½	4.47	3.65	5
CI5724-WL	3	4.70	4.30	5
CI5732-WL	4	5.75	5.23	5

Diagrams



EMT

Accessories



	Cat. no.	Trade size (in.)	Max. EMT dia. (in.)	Hole size (in.)
One-hole EMT straps (galvanized steel)				
 CI1304 / CI1316	CI1304	1/2	0.71	1/4
	CI1306	3/4	0.92	1/4
	CI1308	1	1.16	5/16
	CI1310	1 1/4	1.51	7/16
	CI1312	1 1/2	1.74	7/16
	CI1316	2	2.20	9/16
Two-hole EMT straps (galvanized steel)				
 CI1404 / CI1416	CI1404	1/2	0.71	3/16
	CI1406	3/4	0.92	3/16
	CI1408	1	1.16	3/16
	CI1410	1 1/4	1.51	1/4
	CI1412	1 1/2	1.74	1/4
	CI1416	2	2.20	3/8
	CI1520	2 1/2	2.88	3/8
	CI1524	3	3.50	3/8
	CI1528	3 1/2	4.00	1/2
	CI1532	4	4.50	1/2
 CI1520 / CI1532				



	Cat. no.	Trade size (in.)		Clamping range (in.)	
		EMT	Flex.	Min.	Max.
EMT / flex couplings (zinc alloy)					
 CI5153	CI5153	1/2	3/8	0.17	0.63
	CI5154	1/2	1/2	0.75	0.95
 CI5154					




	Cat. no.	Max. flex. conduit dia. (in.)	Hole size (in.)
One-hole double-sided strap (galvanized steel)			
 CI7538	CI7538*	1.05	3/16

*Any combination of 3/8 in., 1/2 in. and 3/4 in. EMT, rigid conduit, flexible conduit or teck cables

EMT

Accessories



 500-SC / 503-SC		Cat. no.	Trade size (in.)	Jaw opening (in.)	Tap base and back	Dimensions (in.)		
						A	B	C
						Beam clamps (malleable iron)		
		500-SC	¼ NC	15⁄16	¼-20	1	1¼	17⁄16
		501	5⁄16 NC	7⁄8	5⁄16-18	1 1⁄16	1 1⁄16	1 11⁄16
		502	¾ NC	1	¾-16	2	1 7⁄8	1¾
		503-SC	½ NC	1	½-13	2½	2 3⁄8	2 3⁄8

500-SC / 503-SC





CICH-0404 / CICH-3232

	Trade size (in.)	
Cat. no.	EMT	Rigid
Conduit hangers – steel (with nuts and bolts)		
CICH-0404	½	½
CICH-0606	¾	¾
CICH-0808	1	1
CICH-0010	1¼	–
CICH-1012	1½	1¼
CICH-1200	–	1½
CICH-1616	2	2
CICH-2020	2½	2½
CICH-2424	3	3
CICH-2828	3½	3½
CICH-3232 *	4	4

CICH-0404 / CICH-3232

* Not CSA certified

EMT

Pull elbows and conduit fittings



		Trade		Dimensions (in.)		
		Cat. no.	size (in.)	A	B	C
	Pull elbows, EMT to box (zinc alloy)					
	CI5204	1/2	1 5/16	1 1/8	—	
	CI5206	3/4	1 1/2	1 1/4	—	
CI5204 / CI5206 Zinc die cast locknut						
	Pull elbows, EMT to EMT (zinc alloy)					
	CI5304	1/2	1 5/16	1 5/16	—	
	CI5306	3/4	1 5/8	1 1/4	—	
	CI5308G	1	1 15/16	1 5/8	—	
	CI5310-G	1 1/4	2 1/4	2	—	
CI5304 / CI5306 / CI5308-G / CI5310-G -G: with gasket						
	EMT conduit fittings – “C” type (cast aluminum)					
	CICA-1/2	1/2	4 7/8	1 3/8	1 3/8	
	CICA-3/4	3/4	5 9/16	1 1/2	1 7/16	
	CICA-1	1	6 1/2	1 3/4	1 3/4	
	CICA-1-1/4	1 1/4	8 5/8	1 15/16	2 1/2	
	CICA-1-1/2	1 1/2	8 5/8	2 11/16	2 1/2	
	CICA-2	2	10 15/16	3	3 3/16	
	EMT conduit fittings – “LB” type (cast aluminum)					
	CILBA-1/2	1/2	4 5/16	1 1/2	1 3/8	
	CILBA-3/4	3/4	4 15/16	1 7/8	1 9/16	
	CILBA-1	1	6 1/16	2 1/16	1 13/16	
	CILBA-1-1/4	1 1/4	7 7/8	2 15/16	2 1/2	
	CILBA-1-1/2	1 1/2	7 7/8	3 1/16	2 1/2	
	CILBA-2	2	10	3 3/4	3 3/16	
	CILBSA-2-1/2 *	2 1/2	13	7 3/8	4 1/4	
	CILBSA-3 *	3	13	7 3/8	4 1/4	
	CILBSA-3-1/2 *	3 1/2	15 1/4	9	5 1/4	
	CILBSA-4 *	4	15 1/4	9	5 1/4	

Covers and gaskets are included with all aluminum conduit fittings


Types CICA and CILBA are also suitable for use with rigid conduit (NPSM threads)

* For EMT only, not threaded

EMT

Conduit fittings, accessories and entrance heads



		Trade		Dimensions (in.)		
		Cat. no.	size (in.)	A	B	C
				EMT conduit fittings – “LRL” type (cast aluminum)		
 CILRL-1/2 / CILRL-2 Combined LL/LR left and right application		CILRL-1/2	½	4 ⁷ / ₁₆	1 ¹¹ / ₁₆	2 ¹ / ₈
		CILRL-3/4	¾	5 ³ / ₁₆	1 ⁷ / ₈	2 ¹ / ₄
		CILRL-1	1	6	2 ³ / ₁₆	2 ¹ / ₂
		CILRL-1-1/4	1¼	7 ¹⁵ / ₁₆	2¾	3½
		CILRL-1-1/2	1½	7 ¹⁵ / ₁₆	3¼	3½
		CILRL-2	2	10 ³ / ₁₆	3 ¹¹ / ₁₆	4 ¹ / ₈
		EMT conduit fittings – “T” type (cast aluminum)				
 CITA-1/2 / CITA-2		CITA-1/2	½	4 ⁷ / ₈	1 ³ / ₈	2 ¹ / ₁₆
		CITA-3/4	¾	5 ⁹ / ₁₆	1 ³ / ₄	2 ¹ / ₈
		CITA-1	1	6½	2	2½
		CITA-1-1/4	1¼	8 ¹¹ / ₁₆	2 ⁵ / ₈	3½
		CITA-1-1/2	1½	8 ¹¹ / ₁₆	3	3 ⁹ / ₁₆
		CITA-2	2	10 ⁷ / ₈	3¼	4 ³ / ₁₆

Covers and gaskets are included with all aluminum conduit fittings
 Types CILRL and CITA are also suitable for use with rigid conduit (NPSM threads)



	Cat. no.	Gros. nom. (in.)
Blank covers for aluminum conduit fittings (stamped aluminum)		
 CIBC-1/2 / CIBC-2	CIBC-1/2	1/2
	CIBC-3/4	3/4
	CIBC-1	1
	CIBC-1-1/4	1 1/4
	CIBC-2	2

For 1 1/2 inch, use CIBC-1-1/4
 Screws not included



	Cat. no.	Trade size (in.)
Gaskets for aluminum conduit fittings (neoprene)		
 CIG-1/2 / CIG-2	CIG-1/2	1/2
	CIG-3/4	3/4
	CIG-1	1
	CIG-1-1/4	1 1/4
	CIG-2	2

For 1 1/2 inch, use CIG-1-1/4



	Cat. no.	Trade size (in.)
Service entrance heads (cast aluminum)		
 CIEFSA-1/2 / CIEFSA-4	CIEFSA-1/2	1/2
	CIEFSA-3/4	3/4
	CIEFSA-1	1
	CIEFSA-1-1/4	1 1/4
	CIEFSA-1-1/2	1 1/2
	CIEFSA-2	2
	CIEFSA-2-1/2	2 1/2
	CIEFSA-3	3
	CIEFSA-3-1/2	3 1/2
	CIEFSA-4	4

Consult page C12 for technical specifications

Rigid conduit

Couplings and locknuts

Couplings



		Trade size (in.)	
	Cat. no.	EMT	Rigid
	EMT / rigid couplings (zinc alloy)		
	CI5164	½	½
	CI5166	¾	¾
	CI5168	1	1

CI5164 / CI5168

Concrete-tight



	Cat. no.	Trade size (in.)
	3-piece couplings (machined steel – zinc galvanized)	
	CI7904	½
	CI7906	¾
	CI7908	1
	CI7910	1¼
	CI7912	1½
	CI7904 / CI7912	EK-406

CI7904 / CI7912



CI1704 / CI1748*



CI1703-PL / CI1706-PL



LN-201 / LN-210



CI1704-AL / CI1732-AL



CI1704-SL / CI1732-SL

Locknuts



Cat. no.					Trade size (in.)
Steel	Aluminum	Nylon	Sealing	Zinc	
Locknuts					
–	–	CI1703-PL	–	–	¾
CI1704*	CI1704-AL	CI1704-PL	CI1704-SL	LN-201	½
CI1706*	CI1706-AL	CI1706-PL	CI1706-SL	LN-202	¾
CI1708*	CI1708-AL	–	CI1708-SL	LN-203	1
CI1710*	CI1710-AL	–	CI1710-SL	LN-204	1¼
CI1712*	CI1712-AL	–	CI1712-SL	LN-205	1½
CI1716*	CI1716-AL	–	CI1716-SL	LN-206	2
CI1720*	CI1720-AL	–	CI1720-SL	LN-207	2½
CI1724*	CI1724-AL	–	CI1724-SL	LN-208	3
CI1728*	CI1728-AL	–	CI1728-SL	LN-209	3½
CI1732*	CI1732-AL	–	CI1732-SL	LN-210	4
CI1740*	–	–	–	–	5
CI1748*	–	–	–	–	6

* cULus Listed

Rigid conduit

Bushings



	Cat. no.	Trade size (in.)
Reducing bushings – NPS (steel)		
	CIRB6R4	$\frac{3}{4} \times \frac{1}{2}$
	CIRB8R4	$1 \times \frac{1}{2}$
	CIRB8R6	$1 \times \frac{3}{4}$
	CIRB10R4	$1\frac{1}{4} \times \frac{1}{2}$
	CIRB10R6	$1\frac{1}{4} \times \frac{3}{4}$
	CIRB10R8	$1\frac{1}{4} \times 1$
	CIRB12R4	$1\frac{1}{2} \times \frac{1}{2}$
	CIRB12R6	$1\frac{1}{2} \times \frac{3}{4}$
	CIRB12R8	$1\frac{1}{2} \times 1$
	CIRB12R10	$1\frac{1}{2} \times 1\frac{1}{4}$
	CIRB16R4	$2 \times \frac{1}{2}$
	CIRB16R6	$2 \times \frac{3}{4}$
	CIRB16R8	2×1
	CIRB16R10	$2 \times 1\frac{1}{4}$
	CIRB16R12	$2 \times 1\frac{1}{2}$
Conduit bushings (zinc die cast)		
	BU-201	$\frac{1}{2}$
	BU-202	$\frac{3}{4}$
	BU-203	1
	BU-204	$1\frac{1}{4}$
	BU-205	$1\frac{1}{2}$
	BU-206	2
	BU-207	$2\frac{1}{2}$
	BU-208	3
	BU-209	$3\frac{1}{2}$
	BU-210	4

CIRB6R4 / CIRB16R12

BU-201 / BU-210



	Cat. no.	Trade size (in.)
Insulated metallic bushings (aluminum)		
	CI2404*	$\frac{1}{2}$
	CI2406*	$\frac{3}{4}$
	CI2408	1
	CI2410	$1\frac{1}{4}$
	CI2412	$1\frac{1}{2}$
	CI2416	2
	CI2420	$2\frac{1}{2}$
	CI2424	3
	CI2428	$3\frac{1}{2}$
	CI2432	4
	CI2440	5
Plastic bushings		
	CI2704	$\frac{1}{2}$
	CI2706	$\frac{3}{4}$
	CI2708	1
	CI2710	$1\frac{1}{4}$
	CI2712	$1\frac{1}{2}$
	CI2716	2
	CI2720	$2\frac{1}{2}$
	CI2724	3
	CI2728	$3\frac{1}{2}$
	CI2732	4
	CI2740	5
	CI2748	6

CI2404 / CI2440

CI2704 / CI2748
Rated 105°C

* Models CI2404 and CI2406 are in zinc





	Cat. no.	Trade size (in.)	Ground wire size (AWG)
Insulated grounding bushings (aluminum)			
	CI2604	$\frac{1}{2}$	14–6
	CI2606	$\frac{3}{4}$	14–6
	CI2608	1	14–6
	CI2610	$1\frac{1}{4}$	14–4
	CI2612	$1\frac{1}{2}$	14–4
	CI2616	2	6–1/0
	CI2620	$2\frac{1}{2}$	6–1/0
	CI2624	3	2–4/0
	CI2628	$3\frac{1}{2}$	2–4/0
	CI2632	4	2–4/0

CI2604 / CI2632
With solid copper lug

Rigid conduit

Pull elbows and conduit fittings



	Cat. no.	Trade size (in.)	A	B	Dimensions (in.) C
	Pull elbows, rigid to box (zinc alloy)				
	CI7204	1/2	1 5/16	1 1/8	—
	CI7206	3/4	1 5/8	1 5/16	—
CI7204 / CI7206 Zinc die cast locknut					
	Pull elbows, rigid to rigid (zinc alloy)				
	CI7304	1/2	1 5/16	1 1/8	—
	CI7306	3/4	1 7/16	1 5/16	—
	CI7304-G	1/2	1 5/16	1 1/8	—
	CI7306-G	3/4	1 7/16	1 5/16	—
	CI7308-G	1	2	1 5/8	—
	CI7310-G	1 1/4	2 1/4	2	—
CI7304 (-G) / CI7310 (-G) -G: with gasket					
  	Rigid conduit fittings – “C” type (cast aluminum)				
	CICA-1/2	1/2	4 7/8	1 3/8	1 3/8
	CICA-3/4	3/4	5 9/16	1 1/2	1 7/16
	CICA-1	1	6 1/2	1 3/4	1 3/4
	CICA-1-1/4	1 1/4	8 5/8	1 15/16	2 1/2
	CICA-1-1/2	1 1/2	8 5/8	2 11/16	2 1/2
	CICA-2	2	10 15/16	3	3 3/16
	CICA-2-1/2	2 1/2	12 3/4	5 1/8	4 1/4
	CICA-3	3	12 3/4	5 1/8	4 1/4
	CICA-3-1/2	3 1/2	15	6 1/2	5 1/4
	CICA-4	4	15	6 1/2	5 1/4
		Rigid conduit fittings – “LRL” type (cast aluminum)			
CILRL-1/2		1/2	4 7/16	1 11/16	2 1/8
CILRL-3/4		3/4	5 3/16	1 7/8	2 1/4
CILRL-1		1	6	2 3/16	2 1/2
CILRL-1-1/4		1 1/4	7 15/16	2 3/4	3 1/2
CILRL-1-1/2		1 1/2	7 15/16	3 1/4	3 1/2
CILRL-2		2	10 3/16	3 11/16	4 1/8
	Rigid conduit fittings – “LL” type (cast aluminum)				
	CILL-2-1/2	2 1/2	12 1/4	5 1/8	5 3/4
	CILL-3	3	12 1/4	5 1/8	5 3/4
	CILL-3-1/2	3 1/2	14 3/8	6 1/4	6 3/4
	CILL-4	4	14 3/8	6 1/4	6 3/4
 	Rigid conduit fittings – “LR” type (cast aluminum)				
	CILR-2-1/2	2 1/2	12 3/4	5 1/8	5 3/4
	CILR-3	3	12 3/4	5 1/8	5 3/4
	CILR-3-1/2	3 1/2	14 3/8	6 1/4	6 3/4
	CILR-4	4	14 3/8	6 1/4	6 3/4

Gaskets and covers are included with all rigid conduit fittings

CICA-1/2 to CICA-2 and all CILRL are also suitable for use with EMT conduit

Rigid conduit

Conduit fittings and accessories



		Dimensions (in.)			
		Trade size (in.)	A	B	C
Rigid conduit fittings – “LB” type (cast aluminum)					
 CILBA-1/2 / CILBA-2 CIELBA-2-1/2 / CIELBA-4	Cat. no.	Trade size (in.)	A	B	C
	CILBA-1/2	1/2	4 ⁵ / ₁₆	1 1/2	1 3/8
	CILBA-3/4	3/4	4 ¹⁵ / ₁₆	1 7/8	1 9/16
	CILBA-1	1	6 ¹ / ₁₆	2 1/16	1 ¹³ / ₁₆
	CILBA-1-1/4	1 1/4	7 7/8	2 ¹⁵ / ₁₆	2 1/2
	CILBA-1-1/2	1 1/2	7 7/8	3 ¹ / ₁₆	2 1/2
	CILBA-2	2	10	3 3/4	3 ³ / ₁₆
	CIELBA-2-1/2	2 1/2	13 3/8	5 1/4	5 1/8
	CIELBA-3	3	13 3/8	5 1/4	5 1/8
	CIELBA-3-1/2	3 1/2	16 1/8	6 ¹¹ / ₁₆	5 7/8
	CIELBA-4	4	16 1/8	6 ¹¹ / ₁₆	5 7/8
Rigid conduit fittings – “T” type (cast aluminum)					
 CITA-1/2 / CITA-4	Cat. no.	Trade size (in.)	A	B	C
	CITA-1/2	1/2	4 7/8	1 3/8	2 1/16
	CITA-3/4	3/4	5 9/16	1 3/4	2 1/8
	CITA-1	1	6 1/2	2	2 1/2
	CITA-1-1/4	1 1/4	8 ¹¹ / ₁₆	2 5/8	3 1/2
	CITA-1-1/2	1 1/2	8 ¹¹ / ₁₆	3	3 9/16
	CITA-2	2	10 7/8	3 3/4	4 ³ / ₁₆
	CITA-2-1/2	2 1/2	12 2/8	6 3/8	5 3/4
	CITA-3	3	12 2/8	6 3/8	5 3/4
	CITA-3-1/2	3 1/2	14 7/8	7 7/8	6 3/4
	CITA-4	4	14 7/8	7 7/8	6 3/4
Rigid conduit fittings – “TB” type (cast aluminum)					
 CITBA-1/2 / CITBA-2	Cat. no.	Trade size (in.)	A	B	C
	CITBA-1/2	1/2	4 3/8	1 3/8	1 3/8
	CITBA-3/4	3/4	5 1/8	2 1/8	1 9/16
	CITBA-1	1	6	2 1/2	1 ¹³ / ₁₆
	CITBA-1-1/4	1 1/4	8 3/8	3 1/2	2 1/2
	CITBA-1-1/2	1 1/2	8 3/8	3 1/2	2 1/2
	CITBA-2	2	10 1/4	4 ⁵ / ₁₆	3 3/8

Gaskets and covers are included with all rigid conduit fittings
 CILBA and CITA-1/2 to CITA-2 are also suitable for use with EMT conduit



	Cat. no.	Trade size (in.)
Blank covers for aluminum conduit fittings (stamped aluminum)		
 CIBC-1/2 / CIBC-2	CIBC-1/2	1/2
	CIBC-3/4	3/4
	CIBC-1	1
	CIBC-1-1/4	1 1/4
	CIBC-2	2

For 1 1/2 inch, use CIBC-1-1/4
 Screws not included




	Cat. no.	Trade size (in.)
Gaskets for aluminum conduit fittings (neoprene)		
 CIG-1/2 / CIG-2	CIG-1/2	1/2
	CIG-3/4	3/4
	CIG-1	1
	CIG-1-1/4	1 1/4
	CIG-2	2

For 1 1/2 inch, use CIBC-1-1/4

Rigid conduit

Accessories



	Cat. no.	Trade size (in.)
Reducing washers (steel)		
 CI6R4 / CI24R20	WA-110 *	$\frac{1}{2} \times \frac{3}{8}$
	CI6R4	$\frac{3}{4} \times \frac{1}{2}$
	CI8R4	$1 \times \frac{1}{2}$
	CI8R6	$1 \times \frac{3}{4}$
	CI10R4	$1\frac{1}{4} \times \frac{1}{2}$
	CI10R6	$1\frac{1}{4} \times \frac{3}{4}$
	CI10R8	$1\frac{1}{4} \times 1$
	CI12R4	$1\frac{1}{2} \times \frac{1}{2}$
	CI12R6	$1\frac{1}{2} \times \frac{3}{4}$
	CI12R8	$1\frac{1}{2} \times 1$
	CI12R10	$1\frac{1}{2} \times 1\frac{1}{4}$
	CI16R4	$2 \times \frac{1}{2}$
	CI16R6	$2 \times \frac{3}{4}$
	CI16R8	2×1
	CI16R10	$2 \times 1\frac{1}{4}$
	CI16R12	$2 \times 1\frac{1}{2}$
	CI20R4	$2\frac{1}{2} \times \frac{1}{2}$
	CI20R6	$2\frac{1}{2} \times \frac{3}{4}$
	CI20R8	$2\frac{1}{2} \times 1$
	CI20R10	$2\frac{1}{2} \times 1\frac{1}{4}$
	CI20R12	$2\frac{1}{2} \times 1\frac{1}{2}$
	CI20R16	$2\frac{1}{2} \times 2$
	CI24R4	$3 \times \frac{1}{2}$
	CI24R6	$3 \times \frac{3}{4}$
	CI24R8	3×1
	CI24R10	$3 \times 1\frac{1}{4}$
	CI24R12	$3 \times 1\frac{1}{2}$
	CI24R16	3×2
	CI24R20	$3 \times 2\frac{1}{2}$
Knockout closures (steel)		
 CI3504* / CI3516*	CI3504 *	$\frac{1}{2}$
	CI3506 *	$\frac{3}{4}$
	CI3508 *	1
	CI3510 *	$1\frac{1}{4}$
	CI3512 *	$1\frac{1}{2}$
	CI3516 *	2


* Not CSA certified

Rigid conduit

Accessories



					Dimensions (in.)		
Cat. no.	Trade size (in.)	Jaw opening (in.)	Tap base and back		A	B	C
Beam clamps (malleable iron)							
500-SC	¼ NC	15/16	¼-20		1	1¼	17/16
501	5/16 NC	7/8	5/16-18		1 9/16	1 9/16	1 11/16
502	¾ NC	1	¾-16		2	1 7/8	1 ¾
503-SC	½ NC	1	½-13		2 ½	2 ¾	2 ¾

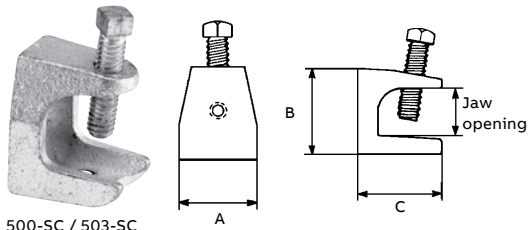

500-SC / 503-SC



Cat. no.	Trade size (in.)
RCS type beam clamps (steel)	
RCS-1/2	½
RCS-3/4	¾
RCS-1	1
RCS-1-1/4	1¼
RCS-1-1/2	1½
RCS-2	2
PC type beam clamps (malleable iron)	
PC-3/8	¾
PC-1/2	½
PC-3/4	¾
PC-1	1
PC-1-1/4	1¼
PC-1-1/2	1½
PC 2SC	2
PC-2-1/2	2½
PC-3	3
PC-3-1/2	3½
PC-4	4



RCS-1/2 / RCS-2



PC-3/8 / PC-4



Cat. no.	Trade size (in.)
EC type beam clamps (malleable iron)	
EC-1/2	½
EC-3/4	¾
EC-1	1
EC-1-1/4	1¼
EC-1-1/2	1½
EC-2	2
EC-2-1/2	2½
EC-3	3
RC type beam clamps (malleable iron)	
RC-1/2	½
RC-3/4	¾
RC-1	1
RC-1-1/4	1¼
RC-1-1/2	1½
RC-2-SC	2
RC-2-1/2	2½
RC-3	3
RC-3-1/2	3½
RC-4-SC	4



EC-1/2 / EC-3



RC-1/2 / RC-4-SC

Rigid conduit

Accessories




	Cat. no.	Trade size (in.)
Insulated conduit nipples (zinc alloy)		
 HA-801 / HA-810	HA-801	½
	HA-802	¾
	HA-803	1
	HA-804	1¼
	HA-805	1½
	HA-806	2
	HA-807	2½
	HA-808	3
	HA-809	3½
	HA-810	4
Conduit nipples (zinc alloy)		
 CI8004 / CI8008 HA-204 / HA-210	CI8004	½
	CI8006	¾
	CI8008	1
	HA-204	1¼
	HA-205	1½
	HA-206	2
	HA-207	2½
	HA-208	3
	HA-209	3½
	HA-210	4
¾" offset nipples (zinc alloy)		
 CI8104 / CI8116	CI8104	½
	CI8106	¾
	CI8108	1
	CI8110	1¼
	CI8112	1½
	CI8116	2
Flange plates		
 FP-401 / FP-406	FP-401 *	½
	FP-402 *	¾
	FP-403 *	1
	FP-404 *	1¼
	FP-405 *	1½
	FP-406 *	2

* Not CSA certified

Rigid conduit

Accessories and entrance heads



	Cat. no.	Trade size (in.)	Max. EMT dia. (in.)	Hole size (in.)
One-hole rigid straps (galvanized steel)				
 CI1203 / CI1216	CI1203	3/8	0.68	1/4
	CI1204	1/2	0.84	1/4
	CI1206	3/4	1.05	1/4
	CI1208	1	1.32	5/16
	CI1210	1 1/4	1.66	7/16
	CI1212	1 1/2	1.90	7/16
	CI1216	2	2.38	9/16
Two-hole rigid straps (galvanized steel)				
 CI1503 / CI1548	CI1503	3/8	0.68	3/16
	CI1504	1/2	0.84	3/16
	CI1506	3/4	1.05	3/16
	CI1508	1	1.32	3/16
	CI1510	1 1/4	1.66	1/4
	CI1512	1 1/2	1.90	1/4
	CI1516	2	2.38	9/32
	CI1520	2 1/2	2.88	3/8
	CI1524	3	3.50	3/8
	CI1528	3 1/2	4.00	1/2
	CI1532	4	4.50	1/2
	CI1540	5	5.56	1/2
	CI1548	6	6.63	1/2



	Cat. no.	Trade size (in.)
Service entrance heads (Cast aluminum)		
 CIEFA-1/2 / CIEFA-4	CIEFA-1/2	1/2
	CIEFA-3/4	3/4
	CIEFA-1	1
	CIEFA-1-1/4	1 1/4
	CIEFA-1-1/2	1 1/2
	CIEFA-2	2
	CIEFA-2-1/2	2 1/2
	CIEFA-3	3
	CIEFA-3-1/2	3 1/2
	CIEFA-4	4

Consult page 12 for technical specifications



	Cat. no.	Max. flex. conduit dia. (in.)	Hole size (in.)
One-hole double-sided strap (galvanized steel)			
 CI7538	CI7538*	1.05	3/16

* Any combination of 3/8 in., 1/2 in. and 3/4 in. EMT, rigid conduit, flexible conduit or teck cables

Roughing-in
Accessories



	Cat. no.	Trade size	Working load lb (kg.)
"Lion" chain (zinc-plated steel)			
 CI8903 / CI8904 /	CI8903	#2	115 (52)
	CI8904	#3	90 (40)
"Jack" chain (zinc-plated steel)			
 CI8910 / CI8912	CI8910	#10-T	43 (19)
	CI8912	#12	29 (13)
"S" hooks (zinc-plated steel)			
 CI8905	CI8905	#105	73 (34)
"Screw" hooks (zinc-plated steel)			
 CI8920 (2-1/2 po) / CI8922 (3 po)	CI8920	#M-10	90 (40)
	CI8922	#M-12	115 (52)
Fixture hooks – 90° (zinc-plated steel)			
 CI8930 CSA not applicable	CI8930	–	115 (52)
Fixture hooks – looped (zinc-plated steel)			
 CI8932	CI8932	–	115 (52)
Tie wire (steel – gauge no. 16)			
 CI8960	CI8960 (300 ft. Coil)	0.06	125 (56)



	Cat. no.	Trade size
Duct seal compound (asbestos free)		
 CIDUCT-1 / CIDUCT-5	CIDUCT-1	1 lb
	CIDUCT-5	5 lb

Seals irregular opening from air, dust or water. Non-hardening sealant that adheres to metal, masonry, wood or plastic. Meets requirement of clause 12.018 CDN electrical code part 1. Safe and easy to use. - Non-corrosive - non-toxic - no asbestos - no unpleasant odor - will not stain or harm hands. Temperature continuous operating range: -34 °C to 88°C (-30 °F to 190 °F). Minimum temperature for installation: -12 °C (10 °F)

Grounding

Ground rod clamps



	Cat. no.	Water pipe size (in.)	Ground wire size (AWG)		Galv. steel (in.)	Copper clad (in.)
			Min.	Max.		
Ground clamp (zinc alloy body / steel screws)						
	CI3106	½ to 1	10 sol.	2 str.	⅝ to 1 *	–
Ground clamp (zinc alloy body / steel screws)						
	CI3108	½ to 1	10 sol.	2 str.	⅝ to 1 *	–
For connecting grounding conductor to either galvanized steel rod or water pipe.						
Ground clamps (brass body / brass screws)						
	CI3110U	½ to 1	10 sol.	2 str.	⅝ to 1 *	⅝ to 1
For connecting grounding conductor to either galvanized steel rod, copper-clad rod or water pipe. CSA certified for wet locations and for direct burial.						
Ground clamps (brass body / brass screws)						
	CI3112U	1¼ to 2	10 sol.	2 str.	–	–
For connecting grounding conductor to water pipe. CSA certified for wet locations and for direct burial						

* Reversible.

Grounding

Ground rod clamps



CIGRC-58

For connecting grounding conductor to either galvanized steel rod or copper-clad rod
CSA certified for wet locations and for direct burial



	Cat. no.	Water pipe size (in.)	Ground wire size (AWG)		Galv. steel (in.)	Copper clad (in.)
			Min.	Max.		
	Ground rod clamps (bronze body / brass screws)					
	CIGRC58	–	8 sol.	1/0 str.	5/8	5/8
	CIGRC34	–	8 sol.	1/0 str.	3/4	3/4



	Cat. no.	Rod size		Ground wire size				Thread size UNC-2A
		in.	mm	Min. (AWG)	Max. (AWG)	Min. (mm²)	Max. (mm²)	
 JAB12	Ground rod clamps							
	Socket type							
	JAB12	½	12.7	10 sol.	2 str.	5.2	33.6	⅞-14
	JAB34C	¾ + ⅝	15.8	8 sol.	3/0 str.	8.3	95.0	⅞-14
	JAB1	1	25.0	8 sol.	4/0 str.	8.3	107.1	⅞-14
	Hex head bolt							
	JAB12H	½	12.7	10 sol.	2 str.	5.2	33.6	⅞-14
	JAB58H	⅝	15.8	8 sol.	1/0 str.	8.3	53.4	⅞-14
	JAB34H	¾	19.0	8 sol.	1/0 str.	8.3	53.4	⅞-14
	JAB1H	1	25.0	8 sol.	4/0 str.	8.3	107.1	⅞-14

Cast of high strength corrosion-resistant copper alloy. Both hex head and socket set screw available. Long bearing surface of clamp on ground wire secures ground connection
UL listed for direct burial.



	Rod size				Ground wire size		Thread size UNC-2A	
	Cat. no.	in.	mm	Min. (AWG)	Max. (AWG)	Min. (mm²)		Max. (mm²)
	Type G budget line ground rod clamps							
	G3*	⅜	9.5	10 sol.	4 str.	5.2	21.1	⅝-18
	G4	½	12.7	10 sol.	2 str.	5.2	33.6	⅜-16
	G5	⅝	15.8	10 sol.	2 str.	5.2	33.6	⅜-16
	G6	¾	19.0	10 sol.	2 str.	5.2	33.6	⅜-16



G3

A dependable ground connection offered at a substantial saving. Cast of high strenth corrosion-resistant copper alloy. Hex head bolts. Simplified compact design will make a lasting
trouble-free connection. UL listed for direct burial.

* Not CSA certified

Grounding

Grounding bushings



			
	Cat. no.	Trade size (in.)	Ground wire size (AWG)
	Insulated grounding bushings		
	CI2604	1/2	14-6
	CI2606	3/4	14-6
	CI2608	1	14-6
	CI2610	1 1/4	14-4
	CI2612	1 1/2	14-4
	CI2616	2	6-1/0
	CI2620	2 1/2	6-1/0
	CI2624	3	2-4/0
	CI2628	3 1/2	2-4/0
	CI2632	4	2-4/0

With solid copper lug

Grounding

Ground electrode plates, boxes and wedge clamps



1016TB

- ¼ in. hot dipped galvanized steel
- As efficient as two ground rods
- Must be buried at least 24 in. below finished grade level according to CEC rule 10-700



	Cat. no.	Description	Wire range (AWG)
Ground electrode steel plates			
Diagram 600 mm min. below finished grade level 0.2 m² total surface area Plate electrode (Rule 10-700(4))	1016TB	Galvanized grounding plate	8 sol. to 3/0 str.
	1016BTB	Galvanized grounding plate (complete with ground rod clamp)	8 sol. to 3/0 str.

10 in. x 16 in. x ¼ in. thick.

	Cat. no.	Description
Ground electrode boxes		
 51628	51628	Pregalvanized steel
	51629	Hot dip galvanized steel
	51628-ALTA	Ground electrode box for Alberta only

14 gauge steel, 10 in. diameter, 12 in. depth.

	Cat. no.	Conductor range (AWG)			Typical tensile values	
		ACSR	AL	AAAC	Conductor	Value (lb)
	Type W – Aluminum service wedge clamps for use with ACSR, AL, AAAC conductor					
	W20-1	1/0	2/0 str.–2 sol.	1/0–4	1/0–6 x 1 ACSR	1,800
	W20-1-AN	1/0	2/0 str.–2 sol.	1/0–4	1/0–6 x 1 ACSR	1,800
	W40-1	4/0–2/0	4/0 str.–2/0 sol.	4/0–2/0	4/0–6 x 1 ACSR	1,900
	W40-1B	4/0–2/0	4/0 str.–2/0 sol.	4/0–2/0	4/0–6 x 1 ACSR	1,900

W20-1

W40 series clamps rated 850 lb ultimate tension for 1/0 ACSR, AL or AAAC.


Specification guide

Cable fittings



Cat. no.	Trade size (in.)	Clamping range (in.)		Dimensions (in.)		
		Min.	Max.	A	B	C
One-screw connectors (zinc alloy)						
CI70	3⁄8	0.13	0.70	1	1 1⁄8	1⁄2
L-16	3⁄8	0.12	0.63	1	—	—
CI71	1⁄2	0.33	0.95	1 3⁄8	1 1⁄2	1⁄2
CI72	3⁄4	0.60	1.15	1 1⁄2	1 13⁄16	1⁄2
Two-screw connectors (zinc alloy)						
CI804	3⁄8	0.18	0.64	7⁄8	1 1⁄16	—
CI806	3⁄4	0.41	0.82	1 3⁄8	1 3⁄16	—
CI808	1	0.50	1.04	1 1⁄8	2	—
CI810	1 1⁄4	0.56	1.06	1 5⁄16	2 3⁄16	—
CI812	1 1⁄2	0.63	1.60	1 1⁄2	2 5⁄8	—
CI816	2	0.86	2.06	1 9⁄16	3	—
Two-screw connectors (steel)						
CI2060	3⁄8	0.11	0.60	1 1⁄2	5⁄8	—
CI2061	3⁄4	0.15	0.90	1 3⁄4	1 3⁄16	—
Two-screw connectors (cast aluminum body and clamp)						
CI2104	1⁄2	0.45	0.59	1 3⁄16	1 3⁄8	19⁄32
CI2106	3⁄4	0.55	0.78	1 3⁄8	1 11⁄16	5⁄8
CI2108	1	0.69	1.01	1 1⁄2	1 15⁄16	3⁄4
CI2110	1 1⁄4	0.84	1.33	1 1⁄2	2 3⁄8	9⁄16
CI2112	1 1⁄2	1.06	1.57	1 9⁄16	2 3⁄4	5⁄8
CI2116	2	1.38	2.06	1 3⁄4	3 1⁄4	3⁄4
One-screw connector (zinc alloy)						
CI2163	3⁄8	0.35	0.61	1	1 5⁄16	7⁄16
One-screw connectors (aluminum)						
CI2166	1⁄2	0.50	0.90	1 9⁄16	1 11⁄16	7⁄16
CI2167	3⁄4	0.71	1.10	1 11⁄16	1 7⁄8	7⁄16
CI2169	1	1.16	1.50	2	2 1⁄2	1⁄2
CI2170	1 1⁄4	1.32	1.77	2 3⁄8	2 7⁄8	5⁄8
CI2171	1 1⁄2	1.77	2.05	2 1⁄2	3 1⁄4	5⁄8
CI2172	2	2.10	2.54	2 11⁄16	3 3⁄4	11⁄16

Diagrams

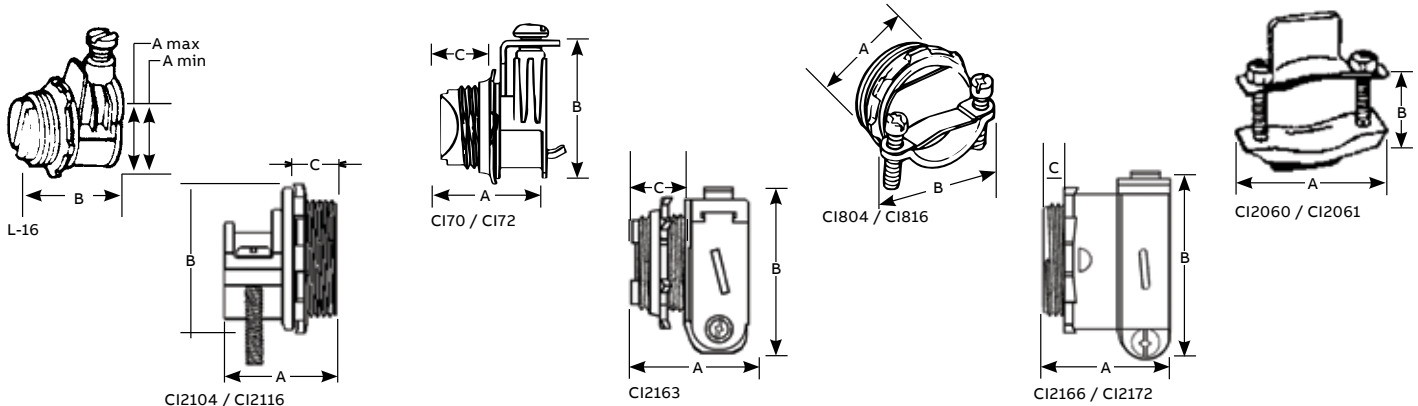

* Suitable for AC90 and ACG90: Clamping range for AC90 is 0.45–0.58 in. and for ACG90 is 0.47–0.57 in..

Technical improvements are constantly taking place in the electrical industry. Cable manufacturers are changing their products from time to time. Accordingly, it is strongly suggested that you verify the cable size with the cable manufacturer prior to selecting a fitting.


Specification guide

Cable connectors



Cat. no.	Trade size (in.)	Clamping range (in.)		Dimensions (in.)		
		Min.	Max.	A	B	C
Two-screw connectors (aluminum)						
CI2173	2½	2.05	3.07	3⅞	4⅞ ₁₆	¾
CI2174	3	2.25	3.57	3⅞	5⅞ ₁₆	1 ⁵ / ₁₆
Duplex connectors (zinc alloy)						
CI2175	¾	0.15	0.65	9 ₁₆	⅝	¾
CI2275*	¾	0.45	0.58	2	1 ⁹ / ₁₆	1 ¹³ / ₁₆
90° connectors (zinc alloy)						
CI2210	¾	0.40	0.63	1⅜	¾	¾
CI2211	½	0.65	0.97	1 ¹¹ / ₁₆	1 ¹ / ₁₆	¾
CI2214	¾	0.77	1.12	1¾	1⅞	½
CI2216	1	1.10	1.57	2	1⅞	⅝
CI2218	1¼	1.27	1.75	3⅞	2⅞	⅝
CI2234	1½	1.70	2.15	5¼	3¾	¾
CI2236	2	2.00	2.62	5⅞	3¾	¾
CI2238	2½	2.50	3.08	6¼	5½	¾
CI2240	3	2.95	3.55	7¼	6⅞	¾
CI4090	4	4.17	4.62	8-¼	6	1
Nonmetallic connector						
CI3360	½	0.30	0.60	1 ⁵ / ₁₆	1 ¹ / ₁₆	⁷ / ₁₆
Two-screw connector (aluminum)						
CI4000	4	4.40	4.55	4 ⁷ / ₈	5¾	⁷ / ₈
Nonmetallic connector						
CI4004	½	0.21	0.42	1 ⁵ / ₁₆	⁷ / ₈	¾
One-screw connectors (steel)						
CI4040	¾	0.19	0.57	1 ⁵ / ₁₆	⁷ / ₈	—
CI9049	¾	0.13	0.37	1⅜	⅝ ₁₆	—

Diagrams

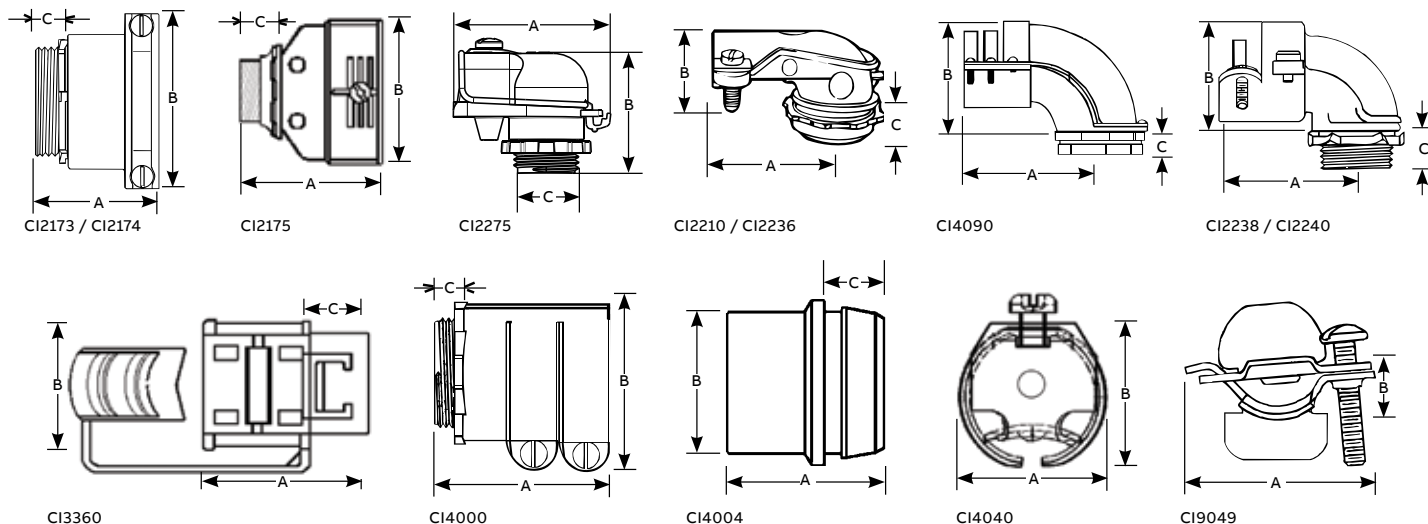

* Suitable for AC90 and ACG90: Clamping range for AC90 is 0.45–0.58 in. and for ACG90 is 0.47–0.57 in.

Technical improvements are constantly taking place in the electrical industry. Cable manufacturers are changing their products from time to time. Accordingly, it is strongly suggested that you verify the cable size with the cable manufacturer prior to selecting a fitting.

Imperial dimensions

Trade size (nominal) (in.)	I.D. (nominal) (in.)	O.D. (nominal) (in.)
EMT		
½	0.622	0.705
¾	0.823	0.921
1	1.047	1.161
1¼	1.382	1.512
1½	1.610	1.740
2	2.067	2.197
2½	2.732	2.874
3	3.354	3.500
3½	3.835	4.000
4	4.331	4.500

Trade size (nominal) (in.)	I.D. (nominal) (in.)	O.D. (nominal) (in.)	Number of threads per in.
Rigid metal conduit			
¾	0.492	0.673	18
½	0.622	0.839	14
¾	0.823	1.051	14
1	1.047	1.315	11½
1¼	1.382	1.661	11½
1½	1.610	1.902	11½
2	2.067	2.374	11½
2½	2.469	2.874	8
3	3.067	3.500	8
3½	3.547	4.000	8
4	4.028	4.500	8
5	5.047	5.563	8
6	6.067	6.626	8

KO trade size (in.)	Metric designator (mm)
¾	12
½	16
¾	21
1	27
1¼	35
1½	41
2	53
2½	63
3	78
3½	91
4	103
5	129
6	155

Trade size (nominal) (in.)	I.D. (min.) (in.)	O.D. (max.) (in.)
Liquidtight flexible metal conduit		
¾	0.484	0.710
½	0.622	0.840
¾	0.820	1.050
1	1.041	1.315
1¼	1.380	1.660
1½	1.575	1.900
2	2.020	2.375
2½	2.480	2.875
3	3.070	3.500
3½	3.500	4.000
4	4.000	4.500

PCV conduit		
½	0.574	0.848
¾	0.778	1.060
1	1.000	1.325
1¼	1.250	1.672
1½	1.500	1.912
2	2.000	2.387
2½	2.413	2.890
3	3.000	3.515
3½	3.480	4.015
4	3.941	4.515
5	4.955	5.593
6	5.896	6.660

Flexible metal conduit		
¾	0.312	0.510
¾	0.375	0.610
7/16	0.437	0.675
½	0.625	0.920
¾	0.812	1.105
1	1.000	1.380
1¼	1.250	1.630
1½	1.500	1.950
2	2.000	2.450
2½	2.500	3.060
3	3.000	3.560
3½	3.500	4.060
4	4.000	4.560

Conversion factors	
Length	Mass
inch x 25.40 = millimeter	pound x 0.4536 = kilogram
millimeter x 0.03937 = inch	kilogram x 2.205 = pound
Volume	Temperature
cubic inch x 16.39 = milliliter or cubic centimeter	(°F - 32) ÷ 1.8 = °C
milliliter or cubic centimeter x 0.06102 = cubic inch	(°C x 1.8) + 32 = °F

Teck cable fittings

Teck cable specifications

The Teck cable name is derived from one of the first users, the Teck-Hughes Gold Mines in Kirkland Lake, Ontario. Teck 90 is the CSA type designation. The trade designation is armored cable.

Teck cables with a working potential up to 5,000 volts are manufactured in accordance with CSA Standard C22.2 No. 131. The cables are provided with a bare ground conductor and an optional outer jacket. Depending on the phase conductor insulation, the cables are designated as Teck 90 (X-LINK) when the insulation is cross-linked polyethylene, and Teck 90 (EP) when it is ethylene propylene. Both cable types are rated for 90° C service (dry location) and 75° C (wet locations). When Teck cable is suitable for installation at a temperature down to minus 40° C, it is marked “Teck 90 (X-LINK) Minus 40” or “Teck 90 (EP) Minus 40.”

Teck cable with a working potential over 5,000 volts is manufactured in accordance with IPCEA standards and is certified by CSA. Cables are provided with or without ground wire, as required.

Teck cable with an outer jacket may be used for exposed or concealed wiring in wet or dry locations, indoors and outdoors, and in corrosive environments. It is suitable for use in ventilated, non-ventilated and ladder type cable troughs, and in ventilated flexible cableways in both dry and wet locations. It is also suitable for direct earth burial and for Class II, Division 2; and Class III, Divisions 1 and 2 hazardous locations, as per the Canadian Electrical Code.

Flexibility and ease of installation are key features of Teck cable. The absence of dead air space within the cable increases heat transfer and minimizes condensation. The overall protective covering provides good environmental protection. Bend radius for permanent training during installation usually varies between 7 to 12 times the cable diameter, depending on the construction of the cable and the manufacturer's recommendations. Larger radius bends are required for other conditions.

Electrical Code Requirements

Section 12-3022 of the Canadian Electrical Code requires that the terminating fittings used must provide adequate strain relief to terminal connections and ensure electrical continuity without injury to the nonmetallic sheath. Continuity is mandatory whether or not the armour is used as a grounding conductor. Except for dry locations that are free from corrosive atmosphere, the nonmetallic jacket cannot be stripped back to the point where the armour is exposed after installation.

Where single conductor cables carrying 200 amps or more enter metal boxes through separate openings, certain precautions are required to prevent overheating of the metal by induction. Use of nonferrous or nonmetallic box fittings, locknuts and bushings and installation of non-magnetic panel inserts is suggested in the code. Please refer to the following for further details and complete information:

1. CEC Section 12, Wiring Methods; CEC Section 4, Conductors
2. CSA C22.2 No. 131 and 131S (Supplement #1), Safety Standard for Type Teck Cable
3. CSA C22.2 No. 18.3, Safety Standards for Conduit, Pipes and Cables

Please Note:

The excerpts and other material herein, whether relating to the National Electrical Code, the Underwriters Laboratories, Inc. listing, to industry practice or otherwise, are not intended to provide all relevant information required for use and installation. Reference to original or primary source material and data is mandatory before any application or use is made of the product.

Teck cable fittings

Teck cable specifications

Specifications – Metal clad cable and aluminum sheathed cable

“Metal clad cable type MC is a factory assembly of one or more conductors, each individually insulated and enclosed in a metallic sheath of interlocking tape, or a smooth or corrugated tube.”

Metal clad cable type MC is rated for use up to 5,000 V. The National Electrical Code permits the use of metallic sheath as an equipment-grounding conductor.

Metal clad cables are available with a variety of phase conductor insulations such as cross-linked polyethylene, and silicone rubber ethylene propylene, depending on the rated temperature of conductors and working potential. The metallic sheath can be made with galvanized steel, aluminum, copper or bronze. A special outer covering such as PVC or neoprene over the metallic sheath is usually provided for environmental protection.

Usage

Metal clad cable is not permitted in locations where it could be subject to physical damage. Metal clad cable can be used exposed, concealed, in a cable tray, in any approved raceway, and with minor exceptions, in hazardous locations. Type MC cable can also be used for services, feeders, branch circuits, power, lighting or control and signal circuits.

Use of metal clad cable is permitted in wet locations, or exposed to destructive corrosive conditions. It can be directly buried in earth, concrete or exposed to cinder fills, strong chlorides, caustic alkalis, vapours, chlorine or hydrochloric acids, provided the construction of cable, the conductors within the metallic sheath, the metallic sheath and protective cover over metallic sheath comply with requirements enumerated in Sec. 330-10 of the National Electrical Code.

Bend radius restrictions are dependent on the size of the cable and the type of sheath, i.e. smooth, interlocked armour, corrugated sheath or shielded conductors, and varies from 7 to 15 times the external diameter of the cable.

NEC Article 330 NEC 2008 requires that approved fittings be used for cable termination. Where single-conductor cables carrying alternating current enter a ferrous metal box or enclosure, procedures described in NEC Section 300-31 must be followed to reduce the effects of heating due to induced currents. These procedures include recommended arrangements of conductors, cutting of slots in the metal between individual conductor holes, passing of conductors through insulating walls, or the use of non-magnetic aluminum sheathed cable and aluminum terminating fittings.

Portions of this section reprinted by permission from NFPA 70 Electrical Code®, ©Copyright National Fire Protection Association, Boston, MA.

Please refer to the following for further details and complete information:

1. NEC Article 330, Metal Clad Cable (Type MC)
2. UL 4, ANSI C33.9, Safety Standards for Type MC Metal Clad Cable
3. UL 514, ANSI C33.84, Safety Standards for Outlet Boxes and Fittings
4. W-F-406, Federal Specification. Fittings for Cable, Power Electrical and Conduit Metal, Flexible
5. NEMA FM-1, Standards Publication. Fittings and Supports for Conduit and Cable Assemblies

Iberville AMC Series

Aluminum cable fittings for armoured and Teck 90 cables



Metallic cable glands suitable for jacketed and non-jacketed metal clad and Teck 90 cables designed for optimum integrity in general and industrial applications.

Certifications / Standards:



Features and benefits:

- Excellent pull-out strength
- Robust metallic construction
- Quick and easy installation without disassembly
- Provides grounding continuity of cable armor via proven spring methodology
- Splined gland and gripping features for ease of installation
- Locknut included

Applications:

- Provides means for terminating jacketed and non-jacketed metal clad and Teck 90 cables to a bulkhead or enclosure in industrial applications
- Mining, oil and gas, chemical and industrial markets
- Construction and installation zones where metal clad and Teck 90 cables are specified

Conforms to:

- CSA C22.2-18.3/-94.2 and UL514B/50E
 - Wet and Dry Location
- RoHS (Restriction of Hazardous Substances Directive) 2011/65/EU/ Incorporating 2015/863 amendment to Annex II

Compatible with cable types:

- Teck 90
- Type MC (aluminum/steel)
 - Jacketed interlocking armor (MCI, MCI-A)
 - Jacketed corrugated metal clad (MCC)
- ACWU90 / ACGWU90
- AC90 / ACG90 II

Material:

- Copper-free aluminum
- Chloroprene seal
- Copper-plated stainless steel spring
- Zinc or aluminum locknut

Environmental ratings:

Ingress protection


- Type 4 (when used with jacketed cables only)

Working temperature:

- Normal use: -25 to +90°C (-13 to +194°F)

Temperature range:

°C	-65	-45	-25	-5	0	5	60	90	105	120	150	250
°F	-85	-49	-13	23	32	41	140	194	221	248	302	482
Static												

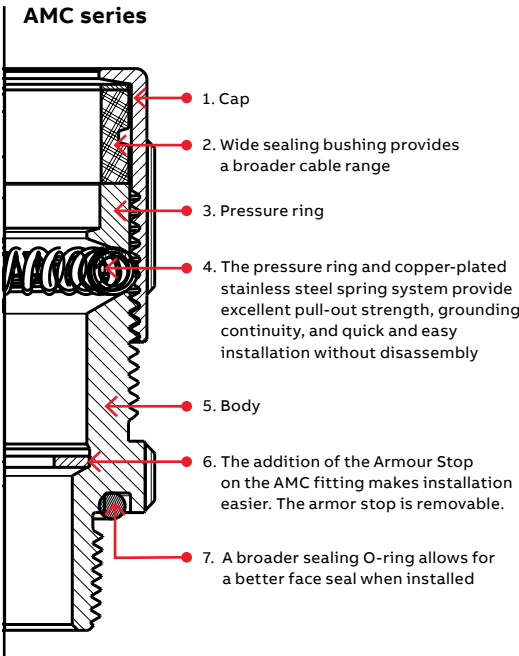


AMC

10 SKUs

Aluminium construction
Compression cable seal
Cable clamping spring

Iberville AMC Series

Specification guide

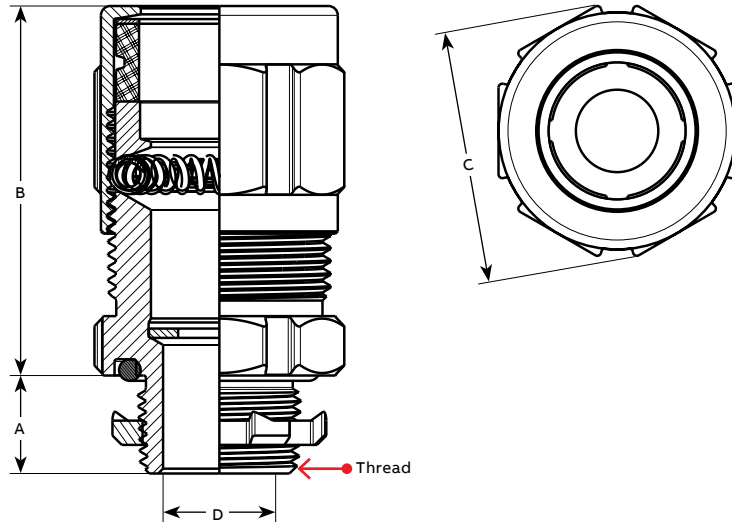

Product selection

Part no:	Thread (NPT)	Range over armour		Range over jacket		A	B	C	D	For installation	
		Min.	Max.	Min.	Max.					L	Approx. Torque
AMC-0501	½	11.18	16.76	12.45	19.81	15.88	54.10	34.54	13.87	31.75	22.60
		(0.440)	(0.660)	(0.490)	(0.780)	(0.625)	(2.130)	(1.360)	(0.546)	(1.250)	(200.0)
AMC-0751	¾	14.73	21.84	16.51	25.40	16.00	60.45	41.28	18.39	31.75	22.50
		(0.580)	(0.860)	(0.650)	(1.000)	(0.630)	(2.380)	(1.625)	(0.724)	(1.250)	(200.0)
AMC-1001	1	19.30	28.45	21.59	33.02	19.94	62.23	52.58	24.26	31.75	22.50
		(0.760)	(1.120)	(0.850)	(1.300)	(0.785)	(2.450)	(2.070)	(0.955)	(1.250)	(200.0)
AMC-1251	1¼	26.67	34.93	28.45	38.10	19.05	73.41	61.60	30.48	44.45	22.60
		(1.050)	(1.375)	(1.120)	(1.500)	(0.750)	(2.890)	(2.425)	(1.200)	(1.750)	(200.0)
AMC-1501	1½	33.27	40.89	35.56	44.96	19.05	74.42	70.10	36.58	44.45	22.60
		(1.310)	(1.610)	(1.400)	(1.770)	(0.750)	(2.930)	(2.760)	(1.440)	(1.750)	(200.0)
AMC-2001	2	39.62	50.93	42.42	54.10	20.65	93.98	92.08	47.75	50.80	42.37
		(1.560)	(2.005)	(1.670)	(2.130)	(0.813)	(3.700)	(3.625)	(1.880)	(2.000)	(375.0)
AMC-2501	2½	48.64	62.74	50.29	65.79	32.51	118.62	108.20	55.88	63.5	62.14
		(1.915)	(2.470)	(1.980)	(2.590)	(1.280)	(4.670)	(4.260)	(2.200)	(2.500)	(550.0)
AMC-3001	3	59.44	76.71	62.99	82.30	34.04	129.67	124.97	69.95	63.5	107.34
		(2.340)	(3.020)	(2.480)	(3.240)	(1.340)	(5.105)	(4.920)	(2.754)	(2.500)	(950.0)
AMC-3501	3½	74.17	88.90	76.71	95.76	34.04	126.24	141.73	82.40	63.5	158.18
		(2.920)	(3.500)	(3.020)	(3.770)	(1.340)	(4.970)	(5.580)	(3.244)	(2.500)	(1400.0)
AMC-4001	4	88.52	102.11	91.31	108.71	34.04	126.49	154.94	95.10	63.5	158.18
		(3.485)	(4.020)	(3.595)	(4.280)	(1.340)	(4.980)	(6.100)	(3.744)	(2.500)	(1400.0)

Note: Product must be installed in accordance with applicable national and local electrical codes.
 Bold numbers are metric; numbers in parenthesis are in inches.

Iberville AMC Series

Installation Instructions



01 Select the appropriate cable gland to accommodate to enclosure and cable used. Determine the working length needed inside the enclosure then prepare the cable as shown. Expose the appropriate length of armor, referring to column L of the Specification Guide table on page C45. See dimensions 'L'.



02 Install the cable gland to the enclosure. This could be in a threaded hole or using a locknut. The locknut shall be hand-tightened and then further tightened 1/4 turn with appropriate tools.



03 **The armor stop may need to be removed prior to this step** if the conductor bundle does not pass through. Feed the cable through the cable gland and push until the cable armor hits the armor stop or body.



04 Tighten the gland nut to the specified torque in the table or until you obtain an appropriate seal. The sealing ring should seal evenly around the cable's outer jacket. Ensure the cable remains centered as much as possible to obtain an optimal seal.

Iberville AMC Series

Fitting Selection Guide

Cable Specs (Voltage, AWG, # Conductors)	Belden	Decacables	General Cable	Nexans	Northern Cables	Prysmian	Shawflex	Southwire
600V 18 AWG 2C	AMC-0501						AMC-0501	
600V 18 AWG 3C	AMC-0501						AMC-0501 AMC-0751	
600V 18 AWG 4C	AMC-0501						AMC-0501 AMC-0751	
600V 16 AWG 2C	AMC-0501	AMC-0501					AMC-0501	
600V 16 AWG 3C	AMC-0501	AMC-0501 AMC-0751					AMC-0501 AMC-0751	
600V 16 AWG 4C	AMC-0501 AMC-0751	AMC-0501 AMC-0751					AMC-0501 AMC-0751	
600V 14 AWG 2C	AMC-0501	AMC-0501 AMC-0751		AMC-0501 AMC-0751	AMC-0501	AMC-0501	AMC-0501 AMC-0751	AMC-0501
600V 14 AWG 3C	AMC-0501	AMC-0501 AMC-0751		AMC-0501 AMC-0751	AMC-0501	AMC-0501	AMC-0501 AMC-0751	AMC-0501 AMC-0751
600V 14 AWG 4C	AMC-0501 AMC-0751	AMC-0751		AMC-0751	AMC-0501 AMC-0751	AMC-0501 AMC-0751	AMC-0751	AMC-0501 AMC-0751
600V 12 AWG 2C	AMC-0501 AMC-0751	AMC-0501 AMC-0751		AMC-0501 AMC-0751	AMC-0501	AMC-0501	AMC-0501 AMC-0751	AMC-0501 AMC-0751
600V 12 AWG 3C	AMC-0501 AMC-0751	AMC-0501 AMC-0751	AMC-0501 AMC-0751	AMC-0751	AMC-0501 AMC-0751	AMC-0501 AMC-0751	AMC-0751	AMC-0501 AMC-0751
600V 12 AWG 4C	AMC-0751	AMC-0751		AMC-0751	AMC-0501 AMC-0751	AMC-0501 AMC-0751	AMC-0751	AMC-0751
600V 10 AWG 2C	AMC-0751	AMC-0501 AMC-0751		AMC-0751	AMC-0501 AMC-0751	AMC-0501 AMC-0751	AMC-0751	AMC-0501 AMC-0751
600V 10 AWG 3C	AMC-0751	AMC-0751	AMC-0751	AMC-0751	AMC-0751	AMC-0751	AMC-0751	AMC-0751
600V 10 AWG 4C	AMC-0751	AMC-0751		AMC-0751 AMC-1001	AMC-0751	AMC-0751	AMC-0751 AMC-1001	AMC-0751
600V 8 AWG 2C	AMC-0751 AMC-1001						AMC-0751 AMC-1001	
600V 8 AWG 3C	AMC-0751 AMC-1001		AMC-1001				AMC-1001	
600V 8 AWG 4C	AMC-1001						AMC-1001	

Iberville AMC Series

Fitting Selection Guide (continued)

Cable Specs (Voltage, AWG, # Conductors)	Belden	Decacables	General Cable	Nexans	Northern Cables	Prysmian	Shawflex	Southwire
1000V 14 AWG 2C			AMC-0501 AMC-0751	AMC-0751	AMC-0501 AMC-0751	AMC-0501 AMC-0751		AMC-0501 AMC-0751
1000V 14 AWG 3C	AMC-0751		AMC-0751	AMC-0751	AMC-0501 AMC-0751	AMC-0501 AMC-0751		AMC-0501 AMC-0751
1000V 14 AWG 4C	AMC-0751		AMC-0751	AMC-0751	AMC-0751	AMC-0751		AMC-0751
1000V 12 AWG 2C	AMC-0751		AMC-0751	AMC-0751	AMC-0501 AMC-0751	AMC-0501 AMC-0751		AMC-0501 AMC-0751
1000V 12 AWG 3C	AMC-0751		AMC-0751	AMC-0751	AMC-0751	AMC-0751		AMC-0751
1000V 12 AWG 4C	AMC-0751		AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-0751	AMC-0751		AMC-0751 AMC-1001
1000V 10 AWG 2C	AMC-0751		AMC-0751	AMC-0751	AMC-0751	AMC-0751		AMC-0751
1000V 10 AWG 3C	AMC-0751		AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-0751		AMC-0751
1000V 10 AWG 4C	AMC-0751 AMC-1001		AMC-0751 AMC-1001	AMC-1001	AMC-0751 AMC-1001	AMC-0751 AMC-1001		AMC-0751 AMC-1001
1000V 8 AWG 2C	AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-0751 AMC-1001		AMC-0751 AMC-1001
1000V 8 AWG 3C	AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-1001	AMC-0751 AMC-1001	AMC-0751 AMC-1001	AMC-0751 AMC-1001		AMC-0751 AMC-1001
1000V 8 AWG 4C	AMC-1001	AMC-1001	AMC-1001	AMC-1001	AMC-1001	AMC-1001		AMC-1001
1000V 6 AWG 1C			AMC-0751	AMC-0751		AMC-0501 AMC-0751		
1000V 6 AWG 2C	AMC-1001	AMC-1001	AMC-1001	AMC-1001	AMC-1001	AMC-1001		AMC-1001
1000V 6 AWG 3C	AMC-1001	AMC-1001	AMC-1001	AMC-1001	AMC-1001	AMC-1001		AMC-1001 AMC-1251
1000V 6 AWG 4C	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1001 AMC-1251		AMC-1251
1000V 4 AWG 1C			AMC-0751	AMC-0751		AMC-0751		
1000V 4 AWG 2C		AMC-1001 AMC-1251	AMC-1001 AMC-1251	AMC-1001 AMC-1251	AMC-1001 AMC-1251	AMC-1001		AMC-1251
1000V 4 AWG 3C	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251		AMC-1251
1000V 4 AWG 4C	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251		AMC-1251
1000V 3 AWG 1C			AMC-0751	AMC-0751 AMC-1001		AMC-0751		
1000V 3 AWG 2C		AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251		

The fittings selection guide is based on **nominal** cable sizes provided by cable manufacturers and does not account for cable manufacturing tolerances.

Copyright© 2019 ABB / 19CP06-101

Iberville AMC Series

Fitting Selection Guide (continued)

Cable Specs (Voltage, AWG, # Conductors)	Belden	Decacables	General Cable	Nexans	Northern Cables	Prysmian	Shawflex	Southwire
1000V 3 AWG 3C	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251		AMC-1251
1000V 3 AWG 4C		AMC-1251 AMC-1501	AMC-1251	AMC-1251 AMC-1501	AMC-1251	AMC-1251		AMC-1501
1000V 2 AWG 1C			AMC-0751 AMC-1001	AMC-0751 AMC-1001		AMC-0751		
1000V 2 AWG 2C		AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251		AMC-1251
1000V 2 AWG 3C	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251	AMC-1251		AMC-1251 AMC-1501
1000V 2 AWG 4C	AMC-1501	AMC-1251 AMC-1501	AMC-1251 AMC-1501	AMC-1501	AMC-1251 AMC-1501	AMC-1251 AMC-1501		AMC-1501
1000V 1 AWG 1C			AMC-1001	AMC-1001		AMC-1001		
1000V 1 AWG 2C		AMC-1251 AMC-1501	AMC-1251 AMC-1501	AMC-1501	AMC-1251 AMC-1501	AMC-1251 AMC-1501		
1000V 1 AWG 3C	AMC-1501	AMC-1501	AMC-1501	AMC-1501	AMC-1501	AMC-1501		AMC-1501
1000V 1 AWG 4C	AMC-1501 AMC-2001	AMC-1501	AMC-1501 AMC-2001	AMC-1501	AMC-1501	AMC-1501		AMC-2001
1000V 1/0 AWG 1C			AMC-1001	AMC-1001		AMC-1001		
1000V 1/0 AWG 2C		AMC-1501	AMC-1501	AMC-1501	AMC-1501	AMC-1501		
1000V 1/0 AWG 3C	AMC-1501	AMC-1501	AMC-1501	AMC-1501	AMC-1501	AMC-1501		AMC-2001
1000V 1/0 AWG 4C	AMC-2001	AMC-2001	AMC-2001	AMC-2001	AMC-2001	AMC-2001		AMC-2001
1000V 2/0 AWG 1C			AMC-1001	AMC-1001		AMC-1001		
1000V 2/0 AWG 2C		AMC-1501	AMC-1501	AMC-1501	AMC-1501	AMC-1501		
1000V 2/0 AWG 3C	AMC-2001	AMC-1501 AMC-2001	AMC-2001	AMC-2001	AMC-1501 AMC-2001	AMC-1501 AMC-2001		AMC-2001
1000V 2/0 AWG 4C	AMC-2001	AMC-2001	AMC-2001	AMC-2001	AMC-2001	AMC-2001		AMC-2001
1000V 3/0 AWG 1C			AMC-1001	AMC-1001 AMC-1251		AMC-1001		
1000V 3/0 AWG 2C		AMC-1501 AMC-2001	AMC-1501 AMC-2001	AMC-2001	AMC-1501 AMC-2001	AMC-1501 AMC-2001		AMC-2001
1000V 3/0 AWG 3C	AMC-2001	AMC-2001	AMC-2001	AMC-2001	AMC-2001	AMC-2001		AMC-2001
1000V 3/0 AWG 4C	AMC-2001 AMC-2501	AMC-2001	AMC-2001	AMC-2001	AMC-2001	AMC-2001		AMC-2001 AMC-2501

The fittings selection guide is based on **nominal** cable sizes provided by cable manufacturers and does not account for cable manufacturing tolerances.
Copyright© 2019 ABB / 19CP06-101

Non-watertight fittings

Two-screw fittings



These two-screw fittings have a wide array of industrial applications in dry locations. These fittings are designed to accommodate a wide range of cables and provide a means to terminate at junction boxes, control centres, panel boards and enclosures for motor control and electrical distribution equipment.

Materials

Two-screw fittings are made of sand-cast, copper-free aluminum (0.4% or less), for single- or multi-conductor cables.

Sizes

Standard trade sizes from ½ to 2 inches are available for use with cables that have outside jacket diameters of 0.18 to 3.15 inches.

Design

Two-screw fittings are specifically designed to accept a large range of armour cable with or without PVC external jacket with the proper throat acting as an armour stop.

Certifications

These aluminum non-watertight fittings are CSA certified for ordinary locations for armoured cables with or without PVC jacket for DRY LOCATION only, including:

- Teck cables
- Aluminum sheathed (corrugated) and Type RA cables
- Communication or instrumentation cables

The XC-280, CI2120 and CI2124 are CSA certified for ORDINARY LOCATIONS only, for use with armoured cables only.



Cat. no.	Trade size (in.)	KO size (in.)	Dia. over cable jacket (in.)		Throat (in.)	Dimensions (in.)	
			Min.	Max.		Overall width	Overall length
XC-280	3⁄8	1⁄2	0.18	0.64	–	–	–
CI2104	1⁄2	1⁄2	0.45	0.59	0.47	1 3⁄8	1 3⁄16
CI2106	3⁄4	3⁄4	0.55	0.78	0.62	1 11⁄16	1 3⁄8
CI2108	1	1	0.69	1.01	0.79	1 15⁄16	1 1⁄2
CI2110	1 1⁄4	1 1⁄4	0.84	1.33	1.03	2 3⁄8	1 1⁄2
CI2112	1 1⁄2	1 1⁄2	1.06	1.57	1.31	2 3⁄4	1 9⁄16
CI2116	2	2	1.38	2.06	1.75	3 1⁄4	1 3⁄4
CI2120	2 1⁄2	2 1⁄2	1.95	2.47	2.10	3 7⁄8	1 7⁄8
CI2124	3	3	2.25	3.15	2.87	4 5⁄8	1 15⁄16

