

**VuLite®**

# 5" TC REMODEL HOUSING

INCANDESCENT LAMPS

**V5TCRW**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

## PRODUCT DESCRIPTION

TC Remodel Housing designed for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the TC housing • In Canada, when insulation is present, type IC fixture must be used • TC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs.

## PRODUCT SPECIFICATIONS

**Lamp** Lamp ratings based on trim selected—see reverse.

**Socket** Medium base porcelain with nickel-plated copper screw shell • Floating socket with spring attaches to trim for installation • Shipped with socket cap to protect against paint overspray.

**Trims** Trim selection shown on reverse.

**Labels** UL/cUL listed for through-branch wiring, damp locations and IP • Product thermally protected against improper use of lamps or insulation • UL/cUL Listed • Trim V2010 is wet location approved for covered ceiling applications • Trims V2015 and V2016 are wet location approved for covered ceiling applications, **when used with outdoor rated PAR lamps.**

**Testing** All reports are based on published industry procedures; field performance may differ from laboratory performance.



Product specifications subject to change without notice.

## INSTALLATION

**Junction Box** Pre-wired junction box, UL/cUL listed for through-branch wiring, maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (8) ½" knockouts and (1) ¾" knockout, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots • Push-in electrical connectors included.

**Housing** TC housing, .03" aluminum • Remodel springs accommodate up to 1 ½" ceiling thickness.

## DIMENSIONS

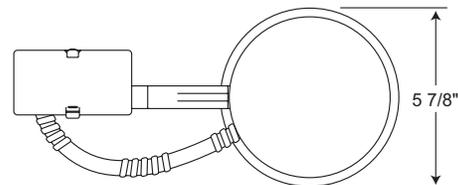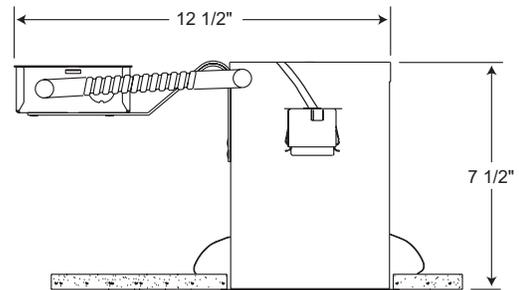

5 1/2" CEILING CUTOUT

## PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating (max.)
V5TCRW	120V	A19/PAR30/PAR30L/BR30/R20/PAR20 (See reverse for max. trim rating)

# 5" TC REMODEL HOUSING

## INCANDESCENT LAMPS

### V5TCRW

#### TRIMS/LAMPS

	Cat. No.	Description	Max. Lamp Rating
	<b>V2015W-WH◆◆</b> <b>V2015B-WH◆◆</b>	White Baffle Black Baffle	75W PAR30 (black only), 75W PAR30 (with socket extender white only), 75W PAR30L, 85W BR30, 40W A19 (white only)
	<b>V2016W-WH◆◆</b> <b>V2016C-WH◆◆</b>	White Cone Clear Cone	75W PAR30 (with socket extender), 75W PAR30L, 85W BR30, 40W A19 (white only), 60W A19 (clear only)
	<b>V2010-WH◆</b>	Stippled Opal Lens Shower with Reflector	75W PAR30L, 90W A19
	<b>V2029-WH</b>	R/ PAR20 Eyeball - White	50W R20, 50W PAR20
	<b>V2030-WH</b>	PAR30 Eyeball - White	75W PAR30

Trim Size: V2015, V2016 and V2029 - 6¼" O.D. V2010 and V2030 - 6½" O.D.

Trim Finish: WH - White.

Note: In Canada when insulation is present, Type IC fixtures must be used.

◆ UL/cUL Listed for use in wet location.

◆◆ UL/cUL Listed for use in wet location with outdoor rated PAR lamp.