John Wood®

Commercial-Grade
Residential Water Heaters

ProLine® & ProLine® Master Electric



Features

Energy Savings

- Meets and exceeds NRCan energy efficiency standards
- Styropour™ base for added energy efficiency

Designed for Performance


- ProLine® and ProLine® Master models are residential water heaters with commercial-grade quality
- Factory-installed plastic-lined heat trap nipples
- Exclusive TankSaver® design to prolong tank life
- Glass lining provides superior protection against tank corrosion
- Thermostatically controlled, long life elements
- Brass drain valve
- CFC-free foam insulation

Serviceability


- Conveniently located T&P and drain valve for ease of installation and serviceability
- Top-mounted heavy duty anode rod for added tank protection

Exclusive Design


- The exclusive TankSaver® design aids the glass lining process to ensure optimum coverage, and guards tank openings for watertight connections



With TankSaver®



Without TankSaver®

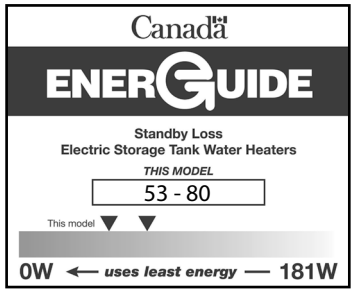

WARRANTY

6 year limited tank and parts on ProLine® models
8 year limited tank and parts on ProLine® Master models
2 or 4 year tank warranty extension kits are available for 6 year models

John Wood®


Commercial-Grade
Residential Water Heaters

SPECIFICATIONS


Model	Series	Capacity			Elements (Upper and Lower)		Standby Loss	Energy Factor	First Hour Rating	Height to Top of Tank A	Diameter B	Shipping Weight	Warranty Tank/ Parts	BC/ON/QC Compliant
		IG	USG	LITRES	WATTS	VOLTS	WATTS		USG (L)	IN (CM)	IN (CM)	LB (KG)	Years	
TOP ENTRY														
E50TE-30208	250	40	50	182	3000	208	53	0.92	50 (188)	48 ¾ (124)	22 (56)	125 (57)	6/6	√
E50TE-30240	250	40	50	182	3000+	240	53	0.92	50 (188)	48 ¾ (124)	22 (56)	125 (57)	6/6	√
E50TE-38240	250	40	50	182	3800++	240	53	0.92	53 (202)	48 ¾ (124)	22 (56)	125 (57)	6/6	√
E50TE-45208	250	40	50	182	4500	208	53	0.92	57 (214)	48 ¾ (124)	22 (56)	125 (57)	6/6	√
E50TE-45240	250	40	50	182	4500+++	240	53	0.92	57 (214)	48 ¾ (124)	22 (56)	125 (57)	6/6	√
E50TE-55208	250	40	50	182	5500	208	53	0.92	61 (231)	48 ¾ (124)	22 (56)	125 (57)	6/6	√
E50TE-60240	250	40	50	182	6000++++	240	53	0.92	63 (240)	48 ¾ (124)	22 (56)	125 (57)	6/6	√
E66TE-38240	275	50	66	250	3800++	240	79	0.88	69 (261)	60 ¼ (153)	22 (56)	146 (66)	6/6	
E66TE-45208	275	50	66	250	4500	208	79	0.88	72 (273)	60 ¼ (153)	22 (56)	146 (66)	6/6	
E66TE-45240	275	50	66	250	4500+++	240	79	0.88	72 (273)	60 ¼ (153)	22 (56)	146 (66)	6/6	
E80TE-30208	250	60	80	287	3000	208	78	0.90	74 (279)	60 ½ (154)	24 (61)	170 (77)	6/6	√
E80TE-30240	250	60	80	287	3000+	240	78	0.90	74 (279)	60 ½ (154)	24 (61)	170 (77)	6/6	√
E80TE-38240	250	60	80	287	3800++	240	78	0.90	77 (293)	60 ½ (154)	24 (61)	170 (77)	6/6	√
E80TE-45208	250	60	80	287	4500	208	78	0.90	81 (305)	60 ½ (154)	24 (61)	170 (77)	6/6	√
E80TE-45240	250	60	80	287	4500+++	240	78	0.90	81 (305)	60 ½ (154)	24 (61)	170 (77)	6/6	√
E80TE-55208	250	60	80	287	5500	208	78	0.90	85 (322)	60 ½ (154)	24 (61)	170 (77)	6/6	√
E80TE-60240	250	60	80	287	6000++++	240	78	0.90	87 (331)	60 ½ (154)	24 (61)	170 (77)	6/6	√
TOP ENTRY														
E50TEM-30240*	250	40	50	182	3000+	240	53	0.92	50 (188)	48 (122)	22 (56)	122 (55)	8/8	√
E50TEM-38240*	250	40	50	182	3800++	240	53	0.92	53 (202)	48 (122)	22 (56)	122 (55)	8/8	√
E80TEM-45240*	250	60	80	287	4500+++	240	78	0.90	81 (305)	60½ (154)	24 (61)	170 (77)	8/8	√
BOTTOM ENTRY														
E50BE-30208	250	40	50	182	3000	208	65	0.91	50 (188)	48 (122)	22 (56)	122 (55)	6/6	√
E50BE-30240	250	40	50	182	3000+	240	65	0.91	50 (188)	48 (122)	22 (56)	122 (55)	6/6	√
E50BE-45208	250	40	50	182	4500	208	65	0.91	57 (214)	48 (122)	22 (56)	122 (55)	6/6	√
E50BE-45240	250	40	50	182	4500+++	240	65	0.91	57 (214)	48 (122)	22 (56)	122 (55)	6/6	√
E80BE-30208	250	60	80	287	3000	208	80	0.90	74 (279)	60½ (154)	24 (61)	170 (77)	6/6	√
E80BE-30240	250	60	80	287	3000+	240	80	0.90	74 (279)	60½ (154)	24 (61)	170 (77)	6/6	√
E80BE-45208	250	60	80	287	4500	208	80	0.90	81 (305)	60½ (154)	24 (61)	170 (77)	6/6	√
E80BE-45240	250	60	80	287	4500+++	240	80	0.90	81 (305)	60½ (154)	24 (61)	170 (77)	6/6	√


* Model has incoloy elements
All models comply with national energy efficiency regulations.
+Model is dual-rated. At 208V wattage is 2253.
++Model is dual-rated. At 208V wattage is 2854.
+++Model is dual-rated. At 208V wattage is 3380.
++++Model is dual-rated. At 208V wattage is 4507.

PREFERRED INSTALLATION - TOP ENTRY MODELS

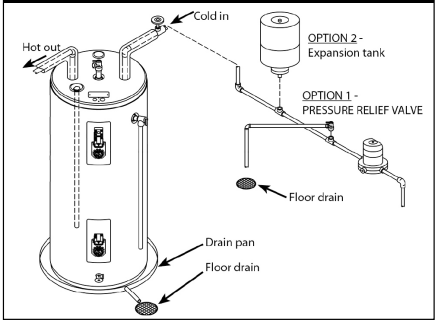

PREFERRED INSTALLATION - BOTTOM ENTRY MODELS

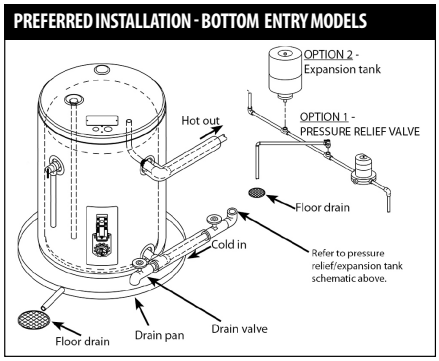

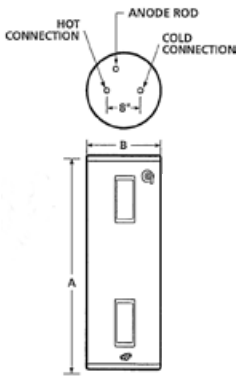

All John Wood electric water heaters listed on this spec sheet have a maximum temperature setting of 150°F.

For Technical Information/Warranty:
Call 1-888-479-8324 or email techsupport@johnwoodwaterheaters.com
www.johnwoodwaterheaters.com

© 2023 Printed in Canada JWEL100 (11-23)