

Reginox


STAINLESS STEEL TOPMOUNT AND UNDERMOUNT SINKS




KINDRED REGINOX SINKS

Kindred Reginox **topmount** and **undermount** sinks offer a wide variety of sizes and bowl configurations from small bar sink models, right up to big, single bowl laundry sinks. Shipped complete with waste fittings, and certified to CSA standards, and backed with a Limited Lifetime manufacturer's warranty, Kindred delivers great value and selection.


REGINOX UNDERMOUNT SINKS • WASTE FITTINGS INCLUDED • LIMITED LIFETIME WARRANTY

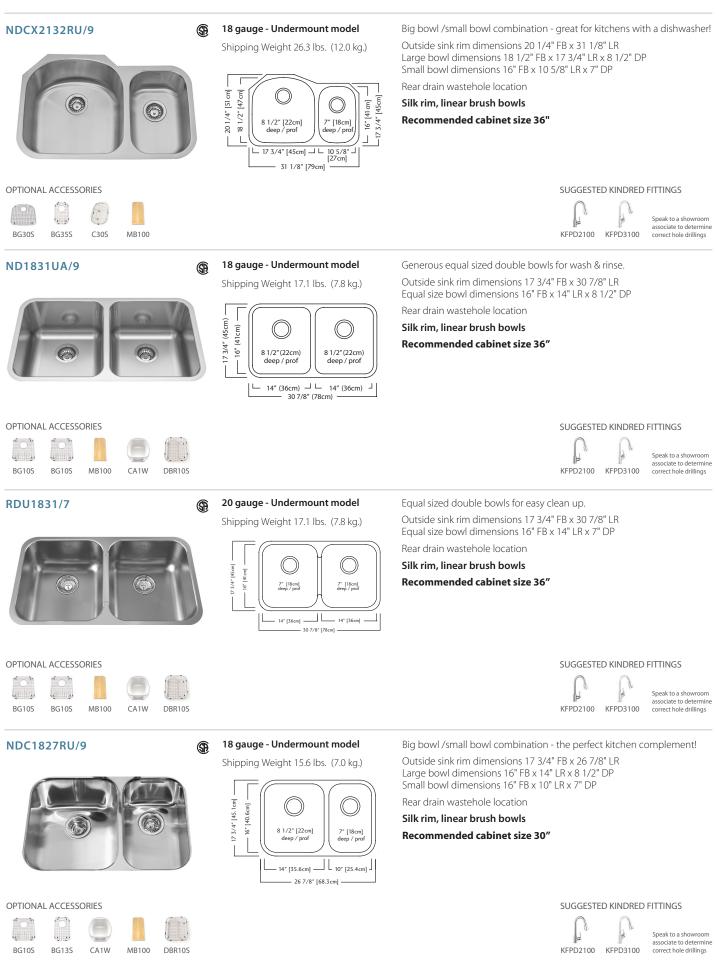

REGINOX UNDERMOUNT SINKS • WASTE FITTINGS INCLUDED • LIMITED LIFETIME WARRANTY

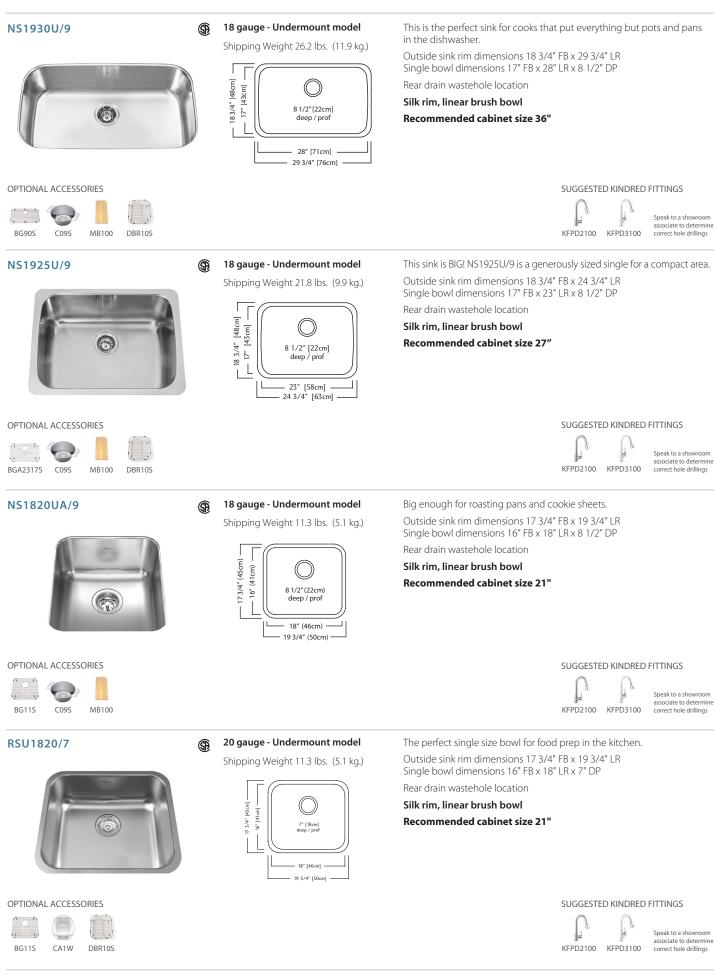

REGINOX UNDERMOUNT SINKS • WASTE FITTINGS INCLUDED • LIMITED LIFETIME WARRANTY

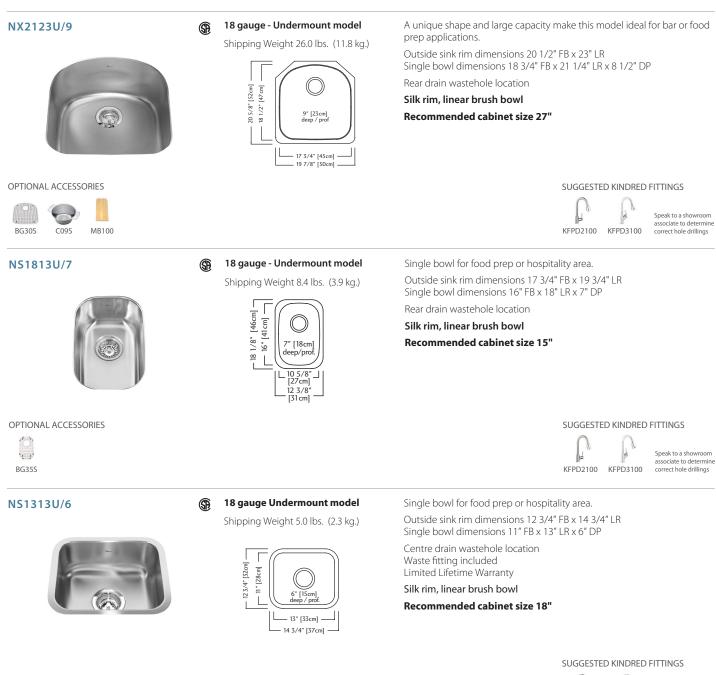


KEPD2100

Speak to a showroom associate to determine correct hole drillings

PD2100 KFPD3100

Franke Kindred Canada Limited Tel: 1-866-687-7465 Fax: 1-800-361-8408 info@kindred-sinkware.com www.kindredcanada.com

REGINOX TOPMOUNT SINKS • WASTE FITTINGS INCLUDED • LIMITED LIFETIME WARRANTY

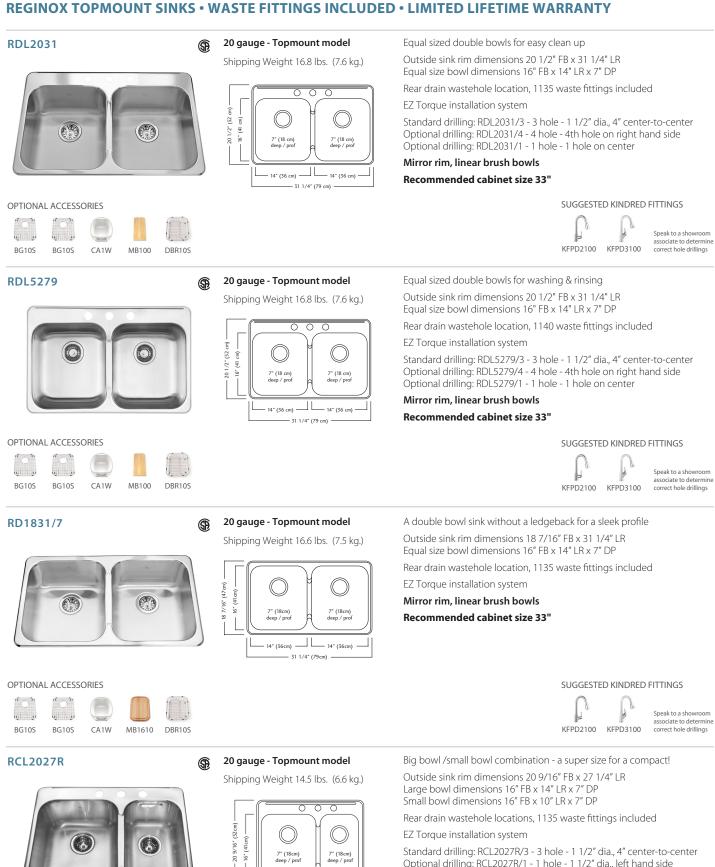

SUGGESTED KINDRED FITTINGS




Speak to a showroom associate to determine correct hole drillings





OPTIONAL ACCESSORIES





Optional drilling: RCL2027R/1 - 1 hole - 1 1/2" dia., left hand side

Mirror rim, linear brush bowls

Recommended cabinet size 30"





RCM1826	\$	20 gauge - Topmount model Shipping Weight 14.5 lbs. (6.6 kg.)	Big bowl /small bowl combination - the perfect kitchen complement! Outside sink rim dimensions 18 1/8" FB x 26 1/2" LR Large bowl dimensions 16" FB x 14" LR x 7" DP Small bowl dimensions 11 5/8" FB x 9 1/4" LR x 6" DP
			EZ Torque installation system
	2		Mirror rim, linear brush bowls
		26 1/2" [67cm]	Recommended cabinet size 30"
OPTIONAL ACCESSORIES			SUGGESTED KINDRED FITTINGS
			Speak to a showroo
BG10S CA1W MB1610 DBR10S			KFPD2100 KFPD3100 correct hole drilling
RSL2020	\$	20 gauge - Topmount model	The perfect single size bowl for food prep in the kitchen
		Shipping Weight 11.0 lbs. (5.0 kg.)	Outside sink rim dimensions 20 1/2" FB x 20" LR Single bowl dimensions 16" FB x 18" LR x 7" DP
			Center drain wastehole location, 1135 waste fitting included
		20 17 ² [52 cm]	EZ Torque installation system Standard drilling: RSL2020/3 - 3 hole - 1 1/2" dia., 4" center-to-center
		7"[18cm]	Optional drilling: RSL2020/4 - 4 hole - 4th hole on right hand side
		deep / prof	Optional drilling: RSL2020/1 - 1 hole - 1 hole on center Mirror rim, linear brush bowl
		18" [46cm] 20" [51cm]	Recommended cabinet size 24"
OPTIONAL ACCESSORIES			SUGGESTED KINDRED FITTINGS
ад — — — — — — — — — — — — — — — — — — —			KFPD2100 KFPD3100 correct hole drilling
RSL5251	\$	20 gauge - Topmount model	A single bowl model ideal for food prep applications
		Shipping Weight 11.0 lbs. (5.0 kg.)	Outside sink rim dimensions 20 1/2" FB x 20" LR Single bowl dimensions 16" FB x 18" LR x 7" DP
			Center drain wastehole location, 1140 waste fitting included
			EZ Torque installation system
		20 1/2, [3 [2] [3 [3 [2] [3 [2] [3 [2] [3 [2] [3 [2] [3 [2] [3 [2] [3 [2] [3 [3 [3 [3 [3 [3 [3 [3 [3 [3 [3 [3 [3	Standard drilling: RSL5251/3 - 3 hole - 1 1/2" dia., 4" center-to-center Optional drilling: RSL5251/1 - 1 hole - 1 hole on center
		deep/prof	Mirror rim, linear brush bowl
		18" [46cm] 20" [51cm]	Recommended cabinet size 24"
DPTIONAL ACCESSORIES			SUGGESTED KINDRED FITTINGS
			Speak to a showroo
BG110S			KFPD2100 KFPD3100 correct hole drilling
\$\$1820	Æ	20 gauge - Topmount model	A large capacity sink make this model ideal for bar or food prep application
	Ś	Shipping Weight 10.3 lbs. (4.7 kg.)	Outside sink rim dimensions 18" FB x 20" LR Single bowl dimensions 16" FB x 14" LR x 7" DP
			Center drain wastehole location, 1135 waste fitting included
		18. [49cm] -	EZ Torque installation system
		⁸ <u>6</u> 7″[18cm]	Mirror rim, linear brush bowl
		deep / prof	Recommended cabinet size 24"
		18" [46cm]	

OPTIONAL ACCESSORIES


BG110S SUGGESTED KINDRED FITTINGS

B

1 KFPD2100 KFPD3100 Speak to a showroom associate to determine correct hole drillings

H B


REGINOX TOPMOUNT SINKS • WASTE FITTINGS INCLUDED • LIMITED LIFETIME WARRANTY

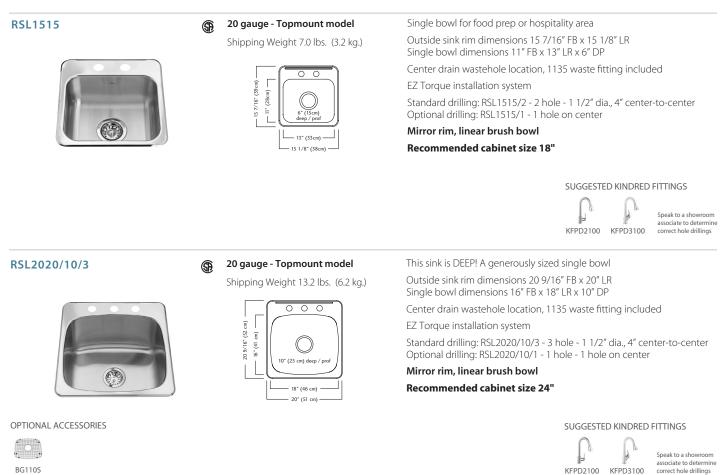

KINDRED FAUCETS

Kindred EZ Torque Faucet

Select Kindred faucets feature our innovative EZ Torque installation system. This simplified installation process allows you to easily attach your faucet from above the counter top with just a few tools. The supply hoses are fed through the EZ Torque faucet base in the sink hole. As the base is tightened in place, two mounting cleats rise and connect with the mounting surface, guaranteeing a custom, secure fit and installation.

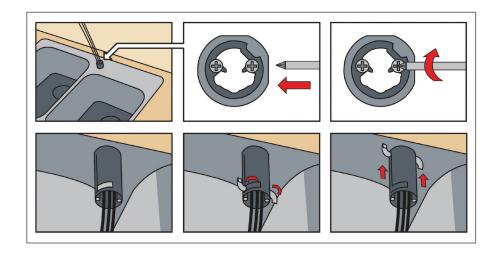


Franke Kindred Canada Limited Tel: 1-866-687-7465 Fax: 1-800-361-8408 info@kindred-sinkware.com www.kindredcanada.com

TORQUE

cUPC®

_cUPC®





High Arc Stainless Steel Gooseneck Faucet

Commercial satin finish Solid stainless steel construction Ceramic disc cartridge Flow – aerated stream 3/8" flexible braided hose x 22" long Requires 1 1/2" diameter hole Faucet can accommodate a countertop thickness up to 1 1/2" Water saver faucet rated at 2.2 USGPM, 8.3 L/min.

FINISHES AVAILABLE




KF10A

KF10B



Shipping Weight 10.4 lbs. (4.7 kg.)



Pro Style Pull Down Spray Faucet Commercial satin finish Solid stainless steel construction Ceramic disc cartridge Flow – aerated stream and spray 3/8" flexible braided hose x 22" long Requires 1 1/2" diameter hole Faucet can accommodate a countertop thickness up to 1 1/2" Water saver faucet rated at 2.2 USGPM, 8.3 L/min.

FINISHES AVAILABLE




KF10C



cUPC®

Shipping Weight 7.9 lbs. (3.6 kg.)



Cube High Arc Stainless Steel Faucet Commercial satin finish Solid stainless steel construction Ceramic disc cartridge Flow – aerated stream 3/8" flexible braided hose x 22" long Requires 1 1/2" diameter hole Faucet can accommodate a countertop thickness up to 1 1/2" Water saver faucet rated at 2.2 USGPM, 8.3 L/min.


FINISHES AVAILABLE



NEW! KF10G



Shipping Weight 8.4 lbs. (3.8 kg.)




Semi-Pro Single Handle Pull-Down Spray Faucet Commercial satin finish Solid stainless steel construction Ceramic disc cartridge Flow - aerated stream and spray Requires 1 3/8" diameter hole Faucet can accommodate a countertop thickness up to 1 1/2" Rated at 1.75 USGPM, 6.6 L/min

Lifetime mechanical warranty

FINISHES AVAILABLE

Commercial Satin

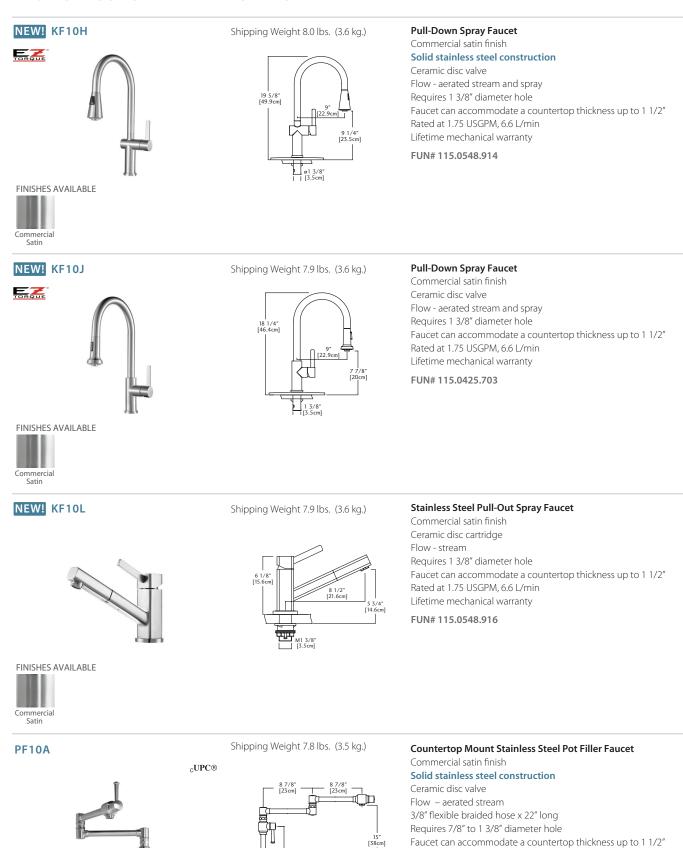

Faucet can accommodate a countertop thickness up to Water saver faucet rated at 2.2 USGPM, 8.3 L/min.

Single cold supply only

FUN# 115.0202.351

11 1/4' [29cm]

FINISHES AVAILABLE


Commercial Satin

_cUPC®

cUPC®

KFPD2100





Pull-Down Spray Faucet

Chrome finish Brass and polymer construction Backflow prevention Spray head extends to 16" long Dual spray mode (spray or stream) Requires 1 3/8" diameter hole Rated at 2.2 USGPM, 8.3 L/min. Lifetime mechanical warranty Lifetime warranty on chrome finish

FUN# 115.0342.366

KFPD3100

FINISHES AVAILABLE



Shipping Weight 7.9 lbs. (3.6 kg.)

6 1/16" [15.4cm]

3/8" [3.5cm] MA

Pull-Down Spray Faucet

Chrome finish Brass and polymer construction Backflow prevention Spray head extends to 16" long Dual spray mode (spray or stream) Requires 1 3/8" diameter hole Rated at 2.2 USGPM, 8.3 L/min. Lifetime mechanical warranty Lifetime warranty on chrome finish FUN# 115.0342.367

Pull-Down Spray Faucet

Rated at 2.2 USGPM, 8.3 L/min Lifetime mechanical warranty

Polished chrome finish Ceramic disc cartridge Flow - aerated stream and spray Requires 1 3/8" diameter hole Baseplate included

FUN# 115.0547.750

FINISHES AVAILABLE



NEW! KFPD6100



FINISHES AVAILABLE



NEW! KFPD7100



FINISHES AVAILABLE




Shipping Weight 4.0 lbs. (1.8 kg.)

Shipping Weight 4.0 lbs. (1.8 kg.)

5 5/16* [13.5cm


2" [15.1 c



Pull-Down Spray Faucet

Polished chrome finish Ceramic disc cartridge Flow - aerated stream and spray Requires 1 3/8" diameter hole Baseplate included Rated at 2.2 USGPM, 8.3 L/min Lifetime mechanical warranty

FUN# 115.0547.801




NEW! KFPOS3000

Chro

Satin Nicke Shipping Weight 5.0 lbs. (2.3 kg.)





Pull-Out Swivel Spray Faucet

Ceramic disc cartridge Flow - aerated spray and stream Requires 1 3/8" diameter hole Rated at 1.8 USGPM, 6.8 L/min Lifetime mechanical warranty FUN# 115.0547.747

