


## Crimping Pliers

with front loading mechanism for wire ferrules (end sleeves)

97  
8

- > for crimping ferrules (end sleeves) according to DIN 46228 parts 1 + 4 in the range 0.5 to 6 mm<sup>2</sup>
- > ideal for work in confined areas, e.g. in narrow and deep switch boxes
- > special tool steel; forged, oil-hardened

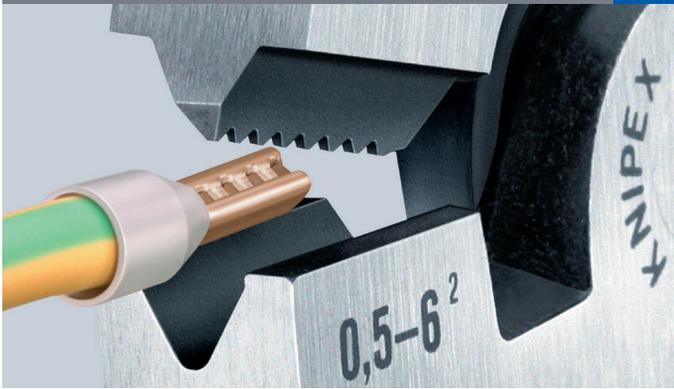

97 81 180



Product Number	Packaging	↔ Inch mm			Head	Handles	Applications	Capacity mm <sup>2</sup>	AWG	Number of crimping positions	⚖ lbs
97 81 180		7 1/4 180			polished	plastic coated	ferrules (end sleeves)	0.5 - 6.0	24 - 0	1	0.45

