

A Complete Floor Box System for Concrete

Leviton has it all.

From the floor box itself to the devices inside, our system delivers superior electrical power, AV and networking solutions.







Delivering The Power You Need, Where You Need It

This is not just a floor box. Leviton delivers the whole solution; providing access to power connectivity and high-performance network infrastructures for every commercial setting.

To be used with finished floors made of:

- Wood Tile
- Vinyl
- TerrazzoConcrete
- Carpet

Maximum Compatibility

Accommodates any standard or Decora, single or duplex receptacle or QuickPort® insert



Ease of Adjustment

Leveling ring allows for adjustment up to 3/4" after installation

Elevation screws offer up to 3" of adjustment before installation

Superior Performance

Forged brass ultra heavy-duty cover plates can withstand a beating



ompliant

WARRANTY



Offices & Health Care Facilities

Floor boxes connect people to commercial grade electrical and data networking devices in lobbies and meeting rooms, where access to power is otherwise limited.

- Provide connectivity to a variety of data and AV networks
- Enable USB charging capabilities

Education

Floor boxes are utilized in various areas of schools such as classrooms, libraries, auditoriums and gymnasiums.

- Provide students with access to the latest technologies
- Broad selection of wiring devices from USB charging receptacles to AFCI and GFCI solutions that enhance student safety
- Network solutions devices provide high-bandwidth infrastructure that support an enhanced learning curriculum





Hospitality

Floor boxes provide access to wiring devices which offer hotel guests unsurpassed comfort and convenience.

- Full power and data connectivity from USB charging receptacles to durable Cat 6 and 5e panels and modules
- Unparalleled selection of structured wiring solutions for networking, audio, video, and more

Retail

Add style, convenience and comfort for customers in public spaces with Leviton floor boxes and wiring devices.

- Unsurpassed safety and convenience
- Access to USB charging receptacles for common areas
- Provide electrical outlets in areas that enhance lighting capabilities



PHASE 1: FROM CONCRETE

The Box System

- 2-Gang PVC Box
- Conduit Reducers
- Protective Cover
- Low Voltage Divider

Protective cover seals box with



Replacement Parts & Accessories


	-
Cat No.	Description
FBDIV-GY	Low voltage divider
FBRPW-GY	Power conduit reducers
FBRDT-GY	Data conduit reducers
FBYAD-GY	'Y' conduit adapter
FB2DE-I	2-Port Decora recessed data strap
FB2DU-I	2-Port Duplex recessed data strap



Recessed straps required for taller jacks



"Y" adapter is used to split power conduit



Flip-lid cover plates with double hinged design allows doors to open 180 degrees _____

Accommodates

2 gang configurations -

6 port Wago connector

included on the ground lead

Pre-assembled gaskets for quick and easy assembly

SE 2: TO FLOORING

Cover Plate

Available in solid, forged brass with clear coat or nickel plating. Multiple plate configurations accommodate all your power, data and AV needs.

Ordering Information

Cat No.	Description		
FBC1F-B, -N	1 Decora Flip Lid & 1 Data Cap		
FBC2F-B, -N	2 Decora Flip Lids		
FBC1S-B, -N	1 Screw Cap & 2 Data Caps		
FBC1X-B, -N	2 Screw Caps & 1 Data Cap		
B Brass NI Nielrol	·		

-B Brass -N Nickel

Devices sold separately

Leveling Ring

Offering a completely grounded system, the leveling ring features adjustability and ease of installation along with brass, corrosion resistant mounting inserts for easy change out/replacement.


Ordering Information


Cat No.	Description
FBLEV-GY	Leveling ring





Dimensions

Floor Box (FBBOX)









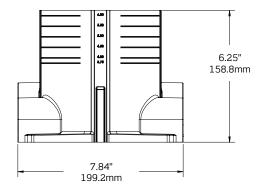

Low Voltage Divider (FBDIV)



Leveling Ring (FBLEV)

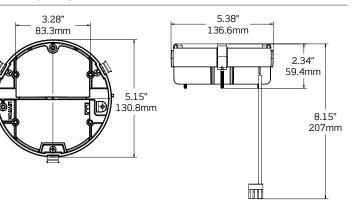


Specifications

PLASTIC COMPONENTS

Catalog #	FBBOX	FBDIV	FBLEV	FBRPW (not shown)	FBRDT (not shown)	FBYAD (not shown)			
Description	Round non-metallic floor box	Low-Voltage Divider	Leveling Ring	Power Conduit Reducers: Two 1.25" to 1.0" and Two 1.25" to 0.75"	Data Conduit Reducers: Two 2.0" to 1.50" and Two 2.0" to 1.25"	Y-Adapter			
Environmental Specification	Environmental Specifications								
Flammability	UL94, 5VA								
Operating Temperature	-35° C to 75° C								
Material Specifications									
Material	PVC	PVC	PVC	PVC	PVC	PVC			
Color	Gray (Concrete Cover is Yellow)	Gray	Gray	Gray	Gray	Gray			
Mechanical Specifications									
Minimum Depth of Pour	3.75"	NA	NA	NA	NA	NA			
Cubic Inch (cm3) Capacity	131.2 cubic inches	NA	NA	NA	NA	NA			
Conduit Feeds	Parallel	NA	NA	NA	NA	NA			
Data Hub Size/Opening	2.0"	NA	NA	NA	NA	NA			
Power Hub Size/Opening	1.25"	NA	NA	NA	NA	NA			
Conduit Selection	Accepts 0.75", 1.0", 1.25", 1.5" and 2.0" schedule 40 and schedule 80 rigid PVC conduit	NA	NA	NA	NA	NA			
Standards & Certifications									
UL File No.	E13397								
Certification Listing	cULus								
Applicable Standards	UL514C, UL 486 A-B, CSA C22.2 No. 85-14								

Dimensions

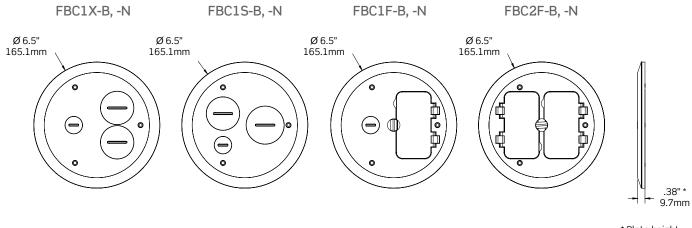

* Plate height after installation is approximately .32" [8.1mm]

Specifications

COVER PLATES

COVER FLATES							
Catalog #	FBC1X-B, -N	FBC1S-B, -N	FBC1F-B, -N	FBC2F-B, -N			
Description	Cover Plate - Duplex Receptacle Screw Caps + 1 Data Cap	Cover Plate - Single Receptacle Screw Cap + 2 Data Caps	Cover Plate - 1 Decora Flip Lid & 1 Data Cap	Cover Plate - 2 Decora Flip Lids			
Environmental Specificati	ons						
Operating Temperature	-40°C to 70°C						
Material Specifications							
Material	Forged Brass	Forged Brass	Forged Brass	Forged Brass			
Finish (Satin)	Brass or Nickel-plated brass	Brass or Nickel-plated brass	Brass or Nickel-plated brass	Brass or Nickel-plated brass			
Mechanical Specifications							
Dimensions	Ø 6.50" x 0.38" (*PLATE HEIGHT AFTER INSTALLATION IS APPROXIMATELY 0.32")						
Product Features							
Openings	Screw Cap, Ø 0.50" & (2) Ø 1.25" (NPT)	Screw Cap, Ø 0.50", Ø 1.25" & Ø 1.50" (NPT)	Flip Lid	Flip Lid			
			Doors open 180°	Doors open 180°			
Coating	Clear coat	Clear coat	Clear coat	Clear coat			
Gasket	Pre-installed on plate	Pre-installed on plate	Pre-installed on plate	Pre-installed on plate			
	O-rings included with screw caps	O-rings included with screw caps					
Ground Plate Included	Yes	Yes	Yes, with pre-installed gasket	Yes, with pre-installed gasket			
Receptacle Compatibility	Any standard duplex receptacle	Any standard single receptacle	Any standard or Decora duplex receptacle	Any standard or Decora duplex receptacle			
			QuickPort [®] Inserts	QuickPort [®] Inserts			
Standards & Certifications	5						
UL File No.	E13397						
Certifications	cULus						
Applicable Standards		UL514C, CSA C22.2 No. 85-14					

Also available in the expanding family of floor boxes from Leviton

Floor Boxes for Wood Frame Construction

Perfect for carpet, wood, tile, and vinyl finished flooring

Key Features:

- Plate gasket and rubber O-ring combine to seal out moisture and air-borne particles
- Meets NEC 2014 Article 314.27B for Floor Boxes
- Available with QuickPort® inserts
- Nickel-plated brass and brass finishes available

Each includes the following:

- Cover Plate with Screw Caps
- Heavy-Duty Specification Grade Receptacle(s)
- Duplex QuickPort® Insert (where specified)
- UL Listed 3-1/2" Deep Electrical Box
- Associated Mounting Hardware & Gaskets



All boxes shown here meet or exceed UL514A requirements including the Scrub Water Test and feature tamper-resistant receptacles to satisfy National Electrical Code[®] 2014 Article 406.12 requirements. Box heights also comply with Section 4.3.8 of the Americans with Disabilities Act specifying accessible design.

Common Applications

- Residential and MDUs Cafes and Restaurants
- Hotels
 - Offices and Meeting Rooms
 - Stages Other open concept spaces

Pop-Up Floor Box Receptacles

Power when you need it, concealed when you don't

Key Features:

- Pre-wired terminal block for easy wiring access and installation
- Low profile, stylish metal cover recesses into the floor when not in use, reducing above floor height to ¼ inch. Press button to access device

070219

Can be used with a variety of flooring types, including tile, stone, wood, laminate, carpet, concrete and vinyl

Available in:

- USB Charger/Tamper-Resistant Receptacle
- Self-Test Tamper-Resistant GFCI Receptacle
- Decora® Tamper-Resistant Receptacle 3-Port QuickPort® Insert (Leviton connectors sold separately)
- Brushed Nickel, Black, Brass and Bronze finishes

Visit our Website at:

www.leviton.com/floorboxes email: commercial@leviton.com

Leviton Manufacturing Co., Inc.

201 N Service Rd, Melville, NY 11747 Telephone: 1-800-323-8920 • FAX: 1-800-832-9538 Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday): 1-800-824-3005



© 2019 Leviton Manufacturing Co., Inc. All rights reserved.