




LEDBar™

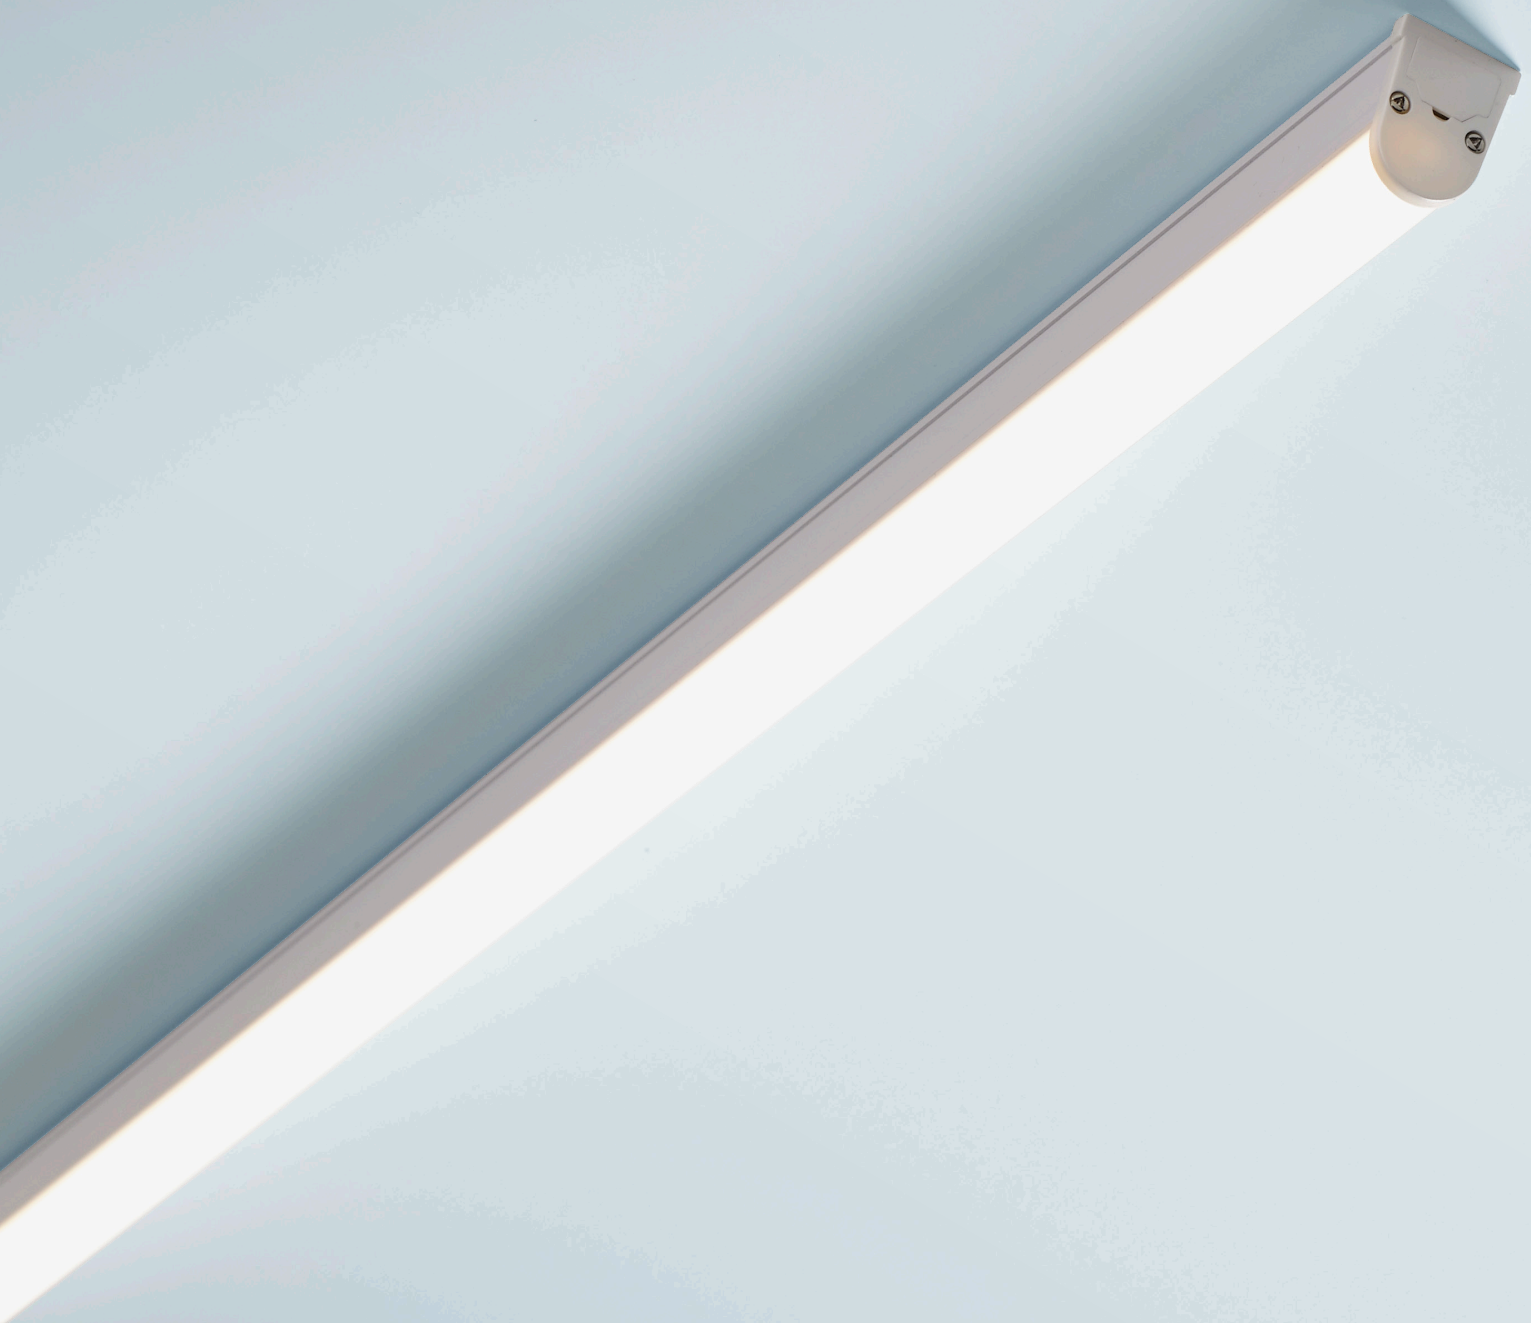

LIGHT UP

WITH LEDBAR

FEATURES

EXPANDABLE: Maximum link of 10 fixtures

120V



DIMMABLE



WITH ON/OFF
SWITCH



UV FREE



25,000
LIFE HOURS



UP TO:
90
CRI



ENERGY STAR



JA8
TITLE 24

6 LENGTH OPTIONS

9"	13-1/2"	22-5/8"	34-1/2"	46-1/4"	58"
229mm	344mm	575mm	876mm	1175mm	1473mm
3W	5W	9W	14W	18W	22W

COLOR TEMPERATURE OPTIONS



2700 K Soft White*



3000 K Warm White



4000 K Cool White



5000 K Daylight



2700 K SOFT WHITE*

LEDBAR9-27K-90	9", 3W, 2700 K, 150 Lumens
LEDBAR14-27K-90	13-1/2", 5W, 2700 K, 250 Lumens
LEDBAR23-27K-90	22-5/8", 9W, 2700 K, 550 Lumens
LEDBAR34-27K-90**	34-1/2", 14W, 2700 K, 850 Lumens
LEDBAR46-27K-90	46-1/4", 18W, 2700 K, 1000 Lumens
LEDBAR58-27K-90	58", 22W, 2700 K, 1200 Lumens



4000 K COOL WHITE

LEDBAR9-40K	9", 3W, 4000 K, 250 Lumens
LEDBAR14-40K	13-1/2", 5W, 4000 K, 400 Lumens
LEDBAR23-40K	22-5/8", 9W, 4000 K, 775 Lumens
LEDBAR34-40K	34-1/2", 14W, 4000 K, 1175 Lumens
LEDBAR46-40K	46-1/4", 18W, 4000 K, 1500 Lumens
LEDBAR58-40K	58", 22W, 4000 K, 1800 Lumens

3000 K WARM WHITE



LEDBAR9-30K	9", 3W, 3000 K, 250 Lumens
LEDBAR14-30K	13-1/2", 5W, 3000 K, 400 Lumens
LEDBAR23-30K	22-5/8", 9W, 3000 K, 775 Lumens
LEDBAR34-30K	34-1/2", 14W, 3000 K, 1175 Lumens
LEDBAR46-30K	46-1/4", 18W, 3000 K, 1500 Lumens
LEDBAR58-30K	58", 22W, 3000 K, 1800 Lumens

5000 K DAYLIGHT



LEDBAR9-50K	9", 3W, 5000 K, 250 Lumens
LEDBAR14-50K	13-1/2", 5W, 5000 K, 400 Lumens
LEDBAR23-50K	22-5/8", 9W, 5000 K, 775 Lumens
LEDBAR34-50K	34-1/2", 14W, 5000 K, 1175 Lumens
LEDBAR46-50K	46-1/4", 18W, 5000 K, 1500 Lumens
LEDBAR58-50K	58", 22W, 5000 K, 1800 Lumens

*JA8 not available for 2700K models

**LEDBAR34-27K-90 is not energy star approved, LEDBAR34-27K-90N meets energy star requirements

LINK

UP TO 10 FIXTURES



ALFT902-WH-3



CONNECTOR (INCLUDED)



ALFT6300-WH



ALFT90-WH-3



CONNECTOR (INCLUDED)

POWER CORD

ALFT6000-WH-3	6' Power cord
ALFT6000S-WH-3	6' Power cord with ON/OFF switch
ALFT6016-WH-3	16" Power cord
FBT6124-BL-WH-3	Power feed with bare lead

FLEXIBLE CORD WITH 90° CONNECTOR

ALFT90-WH-3	Cord with 90° connectors (top connection)
ALFT901-WH-3	Cord with 90° connectors (left connection)
ALFT902-WH-3	Cord with 90° connectors (bottom connection)
ALFT903-WH-3	Cord with 90° connectors (right connection)
*6' Flexible 3-wire cord with 90° connectors	

POWER CORD WITH 90° CONNECTOR

ALFT60901-WH-3	Power cord* with 90° connectors (top connection)
ALFT60902-WH-3	Power cord* with 90° connectors (left connection)
ALFT60903-WH-3	Power cord* with 90° connectors (bottom connection)
ALFT60904-WH-3	Power cord* with 90° connectors (right connection)
*6' Flexible 3-wire power cord with 90° connectors	

FLEXIBLE CORD WITH STRAIGHT CONNECTOR

FBT6106-WH-3	6" Flexible connector
FBT6100-WH-3	12" Flexible connector
FBT6124-WH-3	24" Flexible connector
FBT6136-WH-3	36" Flexible connector

MAG CLIPS

LEDBAR-MAGCLIP-3	Screwless magnetic mounting clips (3 pack)
-------------------------	--

HARDWIRE BOX


ALFT6300-WH	Hardwire box with ON/OFF switch
--------------------	---------------------------------



NO COMPROMISE CONNECTIONS

Thin, sleek and easy to install, the LEDBAR by Liteline is the ideal solution for your commercial or residential task lighting needs. With dependable features that include a durable extruded aluminum frame, you can be confident in product longevity. Suitable for dry locations, this product is an optimal choice for kitchen spaces amongst other similar applications. The built-in, non-flicker, electronic LED driver provides dimming capability with Triac, ELV and incandescent dimmers. The ability to hardwire this fixture is accompanied by the capability to link up to 10 fixtures with an added no shadow linking connector to maximize light output. With a built in on/off switch, a choice of 6 lengths and 4 color temperatures, LEDBAR gives you the perfect combination of design and functionality.

ORDERING GUIDE

	Length	Color Temp.
LEDBAR	<input type="text"/>	<input type="text"/>
	9 : 9"	27-90 : 2700 K, 90CRI
	14 : 14"	30 : 3000 K
	23 : 23"	40 : 4000 K
	34 : 34"	50 : 5000 K
	46 : 46"	
	58 : 58"	

Highlighted option denotes QuickShip.