

UP16 SERIES - 1/6 HP

APPLICATIONS

Commercial, industrial, home dewatering, and water transfer uses

FEATURES

- 1/6 hp oil-free motor with overload protection
- Designed for continuous duty
- Pumps down to 1/4"
- Removable filter screen for easy cleaning
- Garden hose adapter
- 120 °F (49 °C) liquid temperature rating
- cCSAus listed




SERIES SPECIFICATIONS

Volts	Hz	Amps		Watts	Performance (GPM @ Height in Feet)			Shut-Off (ft)	PSI
		FLA	Start		5'	10'	15'		
115	60	2.1	5	200	20	14	7	19	8.2

Item No.	Model	HP	Volts	Switch Type/ Operation	Cord	Weight
620137	UP16	1/6	115	Manual	10' 3 m	8 lbs 3.63 Kg


UP16 SERIES - 1/6 HP

ENGINEERING DATA

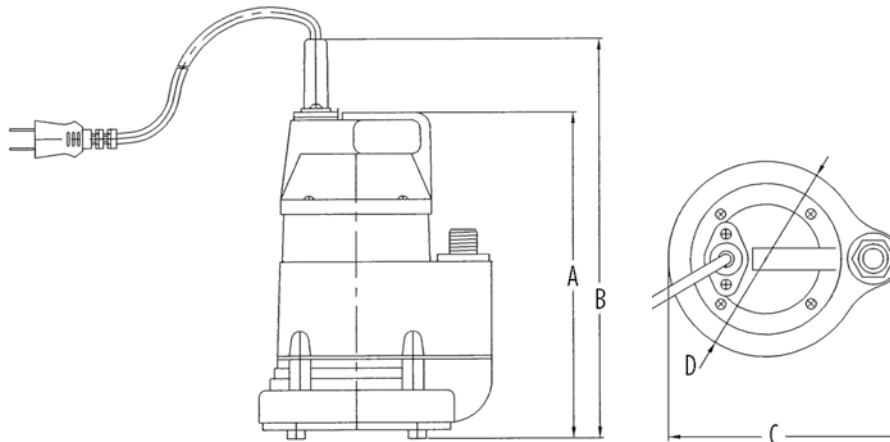

A	B	C	D
8.7"	10.67"	6.2"	5.2"
22.10 cm	27.10 cm	15.75 cm	13.21 cm

PERFORMANCE DATA

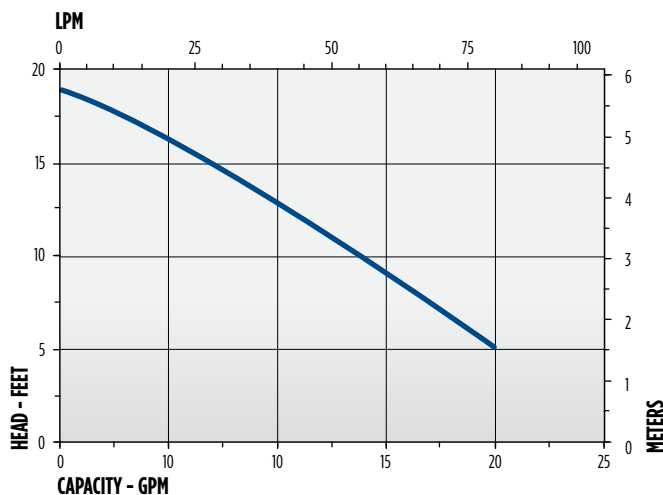

CONSTRUCTION

Motor Housing	Aluminum
Impeller Material	Thermoplastic
Impeller Type	Semi-open
Volute	Aluminum
Motor Shaft	Stainless steel
Shaft Seal	Lip
Fasteners	Stainless steel
Bearings	Upper and lower ball bearings
Power Cord	SJTW 18/3