



7 5 F " G I F 9 H 9 H " B : 5 6 @ ' D @ ; G


Plumbing and mechanical contractors agree that 7UF plugs are the most durable and reliable test plugs available.

THE G I F 9 H 9 H, 1-1/4" - 6" feature a zinc plated chain and ring. The 7UF Plugs have a test pressure rating of as much as 15 PSI, air or water.

THE G I F 9 H 9 H PLUGS were developed to block sewer lines during an air test, or for blocking flows. These are the most economical inflatable plugs available. These plugs are designed with a newly formulated natural rubber compound, making them the toughest and most dependable single size plugs available.



TYPICAL PIPE APPLICATION

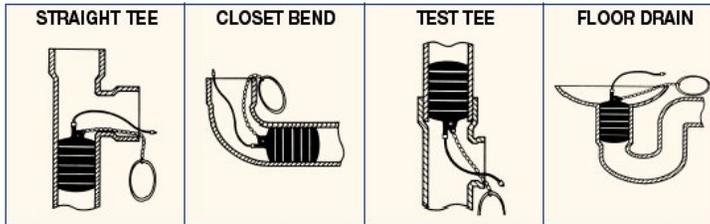

L[PECT\$UWTGVGV\$ Plugs

PART #	Pipe Size	Min Pipe	Max Pipe	Required Inflation	Max Test	Dimentions		
						LTH	DIA	WT.(LB)
4730	.70"	0.7"	1.75"	30 PSI	15 PSI	5.75"	0.625"	0.6
4731	2"	1.8"	2.25"	30 PSI	10 PSI	6"	1.5"	0.8
4732	3"	2.8"	3.25"	30 PSI	15 PSI	6"	2.6"	1
4733	4"	3.5"	4.25"	30 PSI	15 PSI	6"	3.3"	1.2
4734	6"	5.5"	6.25"	30 PSI	15 PSI	6"	4.8"	2.5
4735	8"	6.75"	8.25"	25 PSI	15 PSI	7.75"	6.69"	4.8
4736	10"	8.75"	10.25"	25 PSI	15 PSI	9.75"	8.63"	7.6
4737	12"	10.75"	12.25"	25 PSI	15 PSI	11.75"	8.63"	11