
## Location:

ИІГАВ<sup>®</sup> МІ-НИВ

## **NO HUB COUPLINGS**



Specification: MIFAB<sup>®</sup> Series MI-HUB (specify size) shielded no hub couplings are manufactured with gaskets made from neoprene that meets the requirements of ASTM C-564 housed inside a Type 301 stainless steel corrugated shield. Two (2" through 4" size), four (6" through 10" size) or six (12" and 15" sizes) Type 301 stainless steel clamps tightened with 5/16" Type 305 stainless steel hex head screws surround the shield to provide the sealing force. MI-HUB Series Couplings are tested and certified to the ASTM-#C1277-2018,, CISPI 310-2010, and CSA B602-2016 (File # 247608) Standards and are listed with IAPMO and NSF certified to CISPI 310. Also tested and certified by Intertek Testing Services to CAN/ULC S102.2-07 "Smoke Test." NSF Certified to the CISPI 310 Standard.

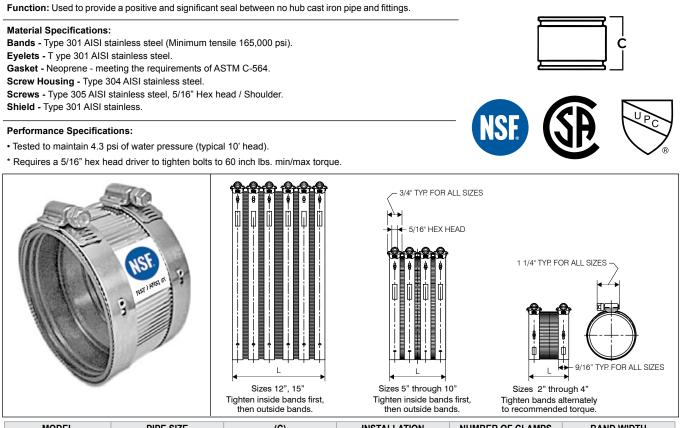

MODEL NUMBER	PIPE SIZE (NOMINAL DIA.)	(C) HEIGHT	INSTALLATION TORQUE (IN LBS)	NUMBER OF CLAMPS PER COUPLING	BAND WIDTH (CLAMP)
MI-HUB-150	1 1⁄2"	2 1/8"	60	2	9/16"
MI-HUB-2150	2 x 1 ½	2 1/8"	60	2	9/16"
MI-HUB-2	2"	2 1/8"	60	2	9/16"
MI-HUB-3	3"	2 1/8"	60	2	9/16"
MI-HUB-32	3" x 2"	2 1/8"	60	2	9/16"
MI-HUB-4	4"	2 1/8"	60	2	9/16"
MI-HUB-42	4" x 2"	2 1/8"	60	2	9/16"
MI-HUB-43	4" x 3"	2 1/8"	60	2	9/16"
MI-HUB-5	5"	3"	60	4	9/16"
MI-HUB-6	6"	3"	60	4	9/16"
MI-HUB-8	8"	4"	60	4	9/16"
MI-HUB-10	10"	4"	60	4	9/16"
MI-HUB-12	12"	5.43"	60	6	9/16"
MI-HUB-15	15"	5.43"	60	6	9/16"

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_

Page No: \_\_

Section No: \_

Schedule No: \_

Contractor: \_\_\_\_

Purchase Order No: \_\_\_\_

MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880