

INSTRUCTION SHEET

# Meter Socket

## Installation of insulated neutral in multi-gang meter socket base



**WARNING:** Risk of shock, disconnect power before installation. Confirm Meter Socket is NOT ENERGIZED.



**CAUTION:** Product should be installed by a qualified electrician in accordance with national and local electrical codes.

### Installation Instructions

1. Remove the fixing screws on the neutral bar. They will not be re-used. (Figure 1)

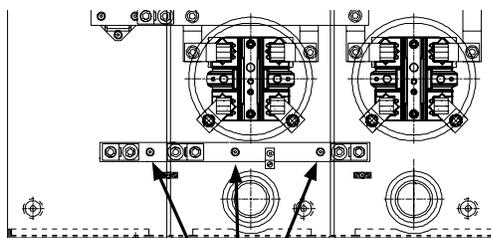


Figure 1

Fixing screws

tnb.abb.com  
tnb.ca.abb.com  
abb.com  
Warranty:  
tnb.abb.com/ecpwarranty

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.



### IMPORTANT

Read and understand all instructions and safety information before use. Be aware of proper usage and potential hazards.

2. Remove the plates with holes that are under the neutral bar.
3. Screw firmly the insulated blocks into the base by using the set-screws from the kit. (Figure 2)

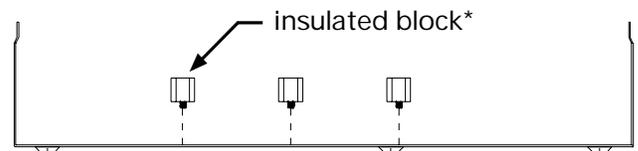


Figure 2

4. Install the neutral bar on top of the insulated blocks and fix it with the round head screws and lock washers from the kit. Screw firmly. (Figure 3)

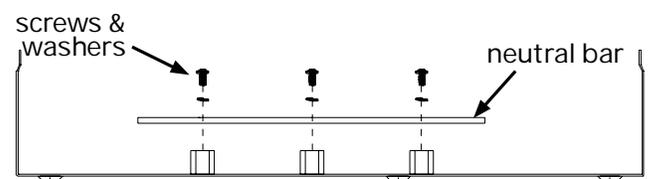


Figure 3


\*Note: The number of insulated blocks supplied with the kit differs as per the number of compartments.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction – in whole or in part – is forbidden without prior written consent of ABB  
Copyright © 2019 ABB All rights reserved.

FEUILLE D'INSTRUCTION

# Socle multi-gang

## Installation de neutre isolé dans un socle multi-gang



**AVERTISSEMENT:** Risque de décharge; déconnectez l'alimentation électrique avant l'installation. **S'ASSURER QUE LE COMPTEUR N'EST PAS SOUS TENSION.**



**ATTENTION:** Le produit doit être installé par un électricien qualifié conformément aux codes électriques nationaux et locaux.

### Instructions d'installation

1. Dévisser les vis de fixation de la barre de neutre. Elles ne seront pas réutilisées. (Figure 1)

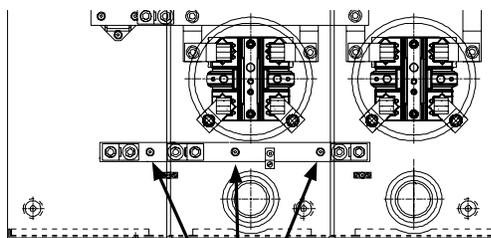


Figure 1

vis de fixation



### IMPORTANT

Veillez lire et comprendre toutes les instructions et toute l'information sur la sécurité avant d'utiliser ce produit. Assurez-vous d'être informé(e) de son utilisation appropriée de même que des risques potentiels.

2. Enlever les plaquettes trouées se retrouvant sous la barre de neutre.
3. Visser fermement les blocs isolants dans le fond du boîtier à l'aide des vis sans tête fournies avec le kit. (Figure 2)

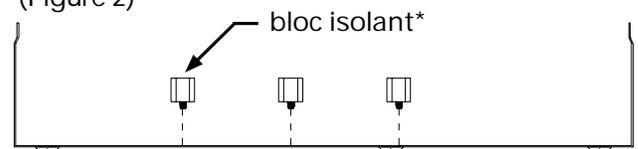


Figure 2

4. Installer la barre de neutre sur les blocs isolants et la fixer avec les vis à tête ronde et les rondelles de blocage fournies avec le kit. Visser fermement. (Figure 3)

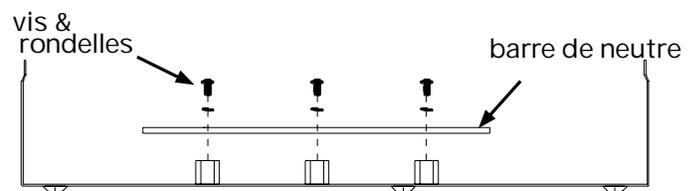


Figure 3

\*Note: Le nombre de blocs isolants diffère en fonction du nombre de compartiments à compteur.