

## DESCRIPTION

- Pressure balancing valve design with 1/2" CC/IPS connections, with 2 or 3 function transfer valve
- 2 function = 2 discrete outputs
- 3 function = 2 discrete and 1 shared output

## OPERATION

- Temperature operates through an 270° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 90° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^\circ$

## CARTRIDGE


- 1222 cartridge design

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1, ASSE 1016, and all applicable requirements referenced therein

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

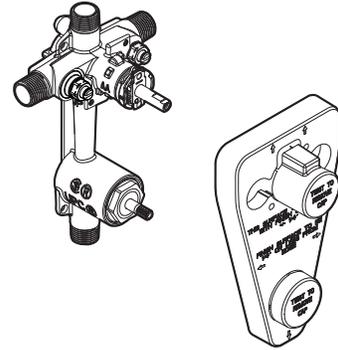

## POSI® VALVE

### 3-Function Built In Transfer Valve



<b>Models:</b>	2521	POSI-TEMP W/2F DIVERTER CC/IPS
	2551	POSI-TEMP W/3F DIVERTER CC/IPS
	2571	POSI-TEMP W/STOPS W/2F DIVERTER CC/IPS
	2581	POSI-TEMP W/STOPS W/3F DIVERTER CC/IP



**Must use twin ell with models 2521 & 2571 when installed with a diverter tub spout.**

---

**Models 2551 & 2581 cannot be installed with a diverter tub spout.**

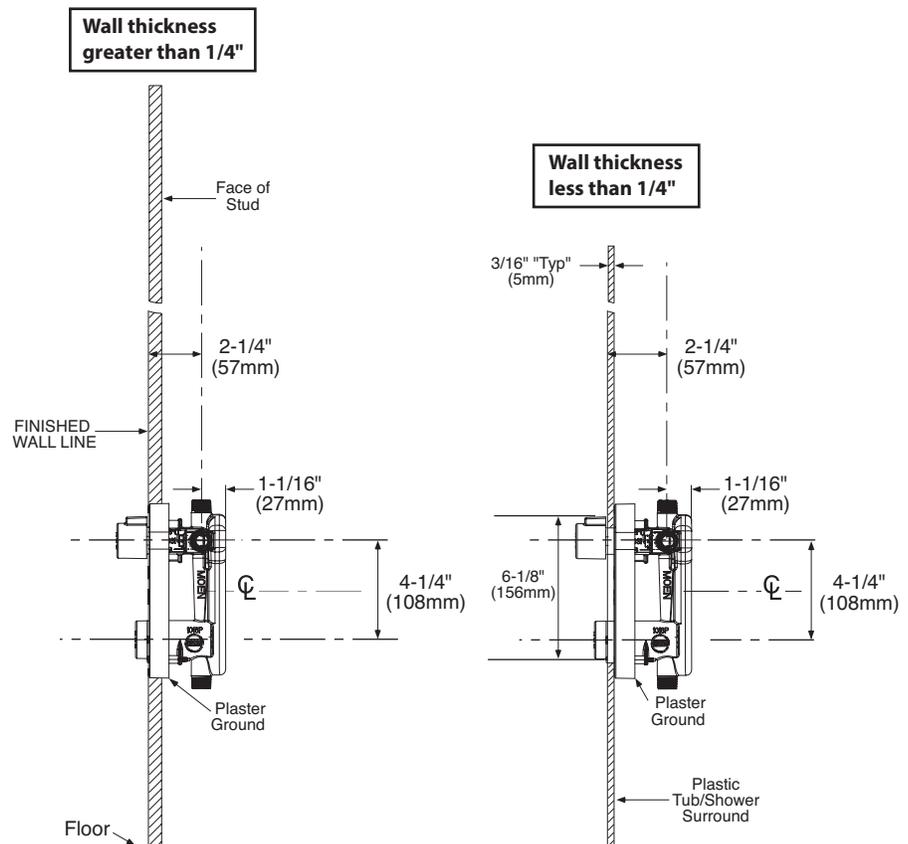

## CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)