



Buy it for looks. Buy it for life.®

**DESCRIPTION**

- Metal construction
- Installs on 10"(254mm) centers
- Designed to be installed on finished decks up to 2-5/8" (67mm)
- Integral 1/2" Pex connections
- Includes (2) 1/2" CPVC adapters
- 140715 kit available separately to connect to 1/2" cold expansion Pex
- Includes test plug

**OPERATION**

- Can be installed with any Moen deck mounted roman tub trim kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

**FLOW**

- Designed to deliver 14 gpm at 45 psi. (53L/min)

**CARTRIDGE**

- Nonmetallic and stainless steel materials

**STANDARDS**


- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1, ASTM F1807, CSA B137.5 for PEX, ASTM D2846, CSA B137.6 for CPVC and all applicable requirements referenced therein
- 1/2" PEX fittings compatible with PEX tubing manufactured to ASTM F877
- 1/2" CPVC fittings manufactured to ASTM D2846

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

**NOTE:** Plumbing codes require this product to be used with a device conforming to ASSE


# Specifications

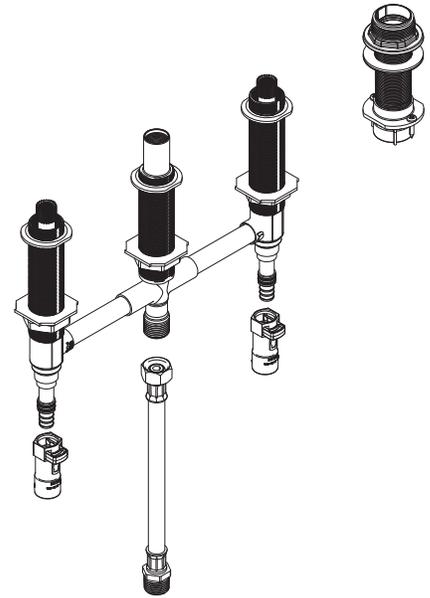

**Model: 9797**

**Moen®  
Roman Tub High Flow  
Rough-In Valve**

104465 Thermostatic mixing valve sold separately is certified to ASSE 1070 and CSA B-125.3

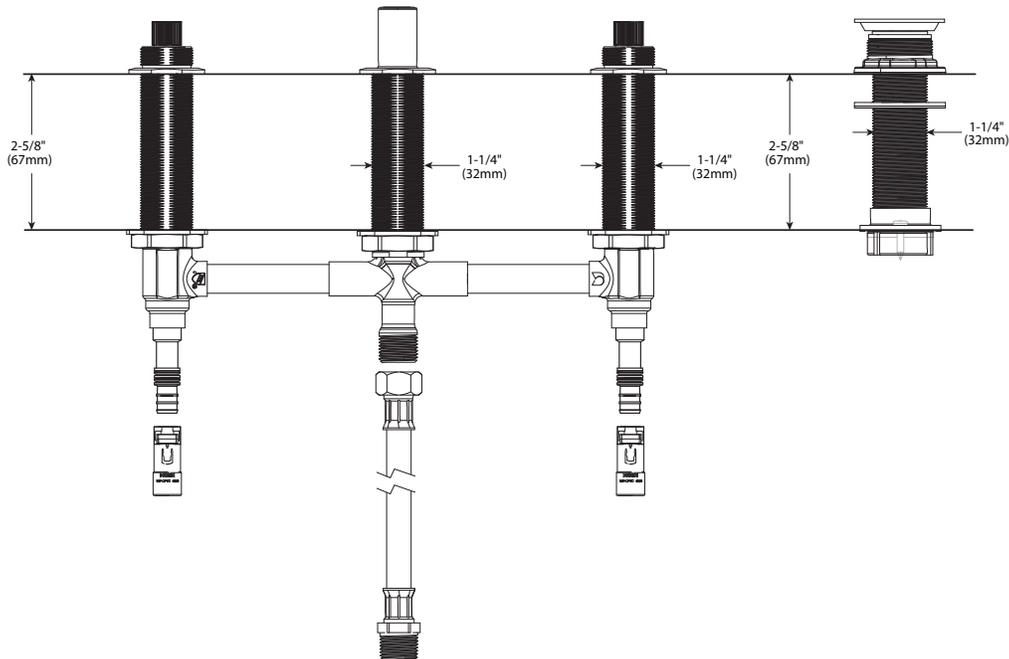

**CRITICAL DIMENSIONS**

(DO NOT SCALE)