


BBLU-D DIMENSIONS & INSTALLATION TOOLING INFORMATION (CONTINUED)

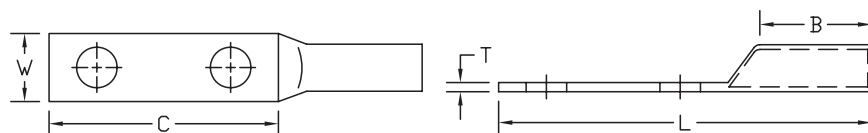

CATALOG NUMBER	COPPER CONDUCTOR SIZE	STUD HOLE SIZE	FIGURE DIMENSIONS (IN.)						INSTALLATION TOOLING				WIRE STRIP LENGTH
			STUD HOLE SPACING	TONGUE WIDTH "W"	TONGUE LENGTH "C"	TONGUE THICKNESS "T"	BARREL LENGTH "B"	OVERALL LENGTH "L"	COLOR CODE	PENN-UNION DIELESS MECHANICAL TOOLS	BURNDY DIE INDEX NO. /TOOL	PENN-UNION DIE CATALOG NO.	
BBLU-035D-2TC14E2	350 kcmil	1/4"	.75	1.28	1.36	.17	2.00	4.02	Red	TDM-500	18	T-18	2-1/8"
BBLU-035D-2TC38		3/8"	1.00	1.28	1.83	.17	2.00	4.49					
BBLU-035D		1/2"	1.75	1.28	3.00	.17	2.00	5.66					
BBLU-040D-2TC14E2	400 kcmil	1/4"	.75	1.39	1.36	.19	2.13	4.15	Blue	TDM-500	19	T-19	2-1/4"
BBLU-040D-2TC38		3/8"	1.00	1.39	1.83	.19	2.13	4.62					
BBLU-040D		1/2"	1.75	1.39	3.00	.19	2.13	5.79					
BBLU-050D-2TC14E2	500 kcmil	1/4"	.75	1.53	1.36	.21	2.25	4.39	Brown	TDM-500	20	T-20	2-3/8"
BBLU-050D-2TC38		3/8"	1.00	1.53	1.83	.21	2.25	4.86					
BBLU-050D		1/2"	1.75	1.53	3.00	.21	2.25	6.03					
BBLU-060D-2TC38	600 kcmil	3/8"	1.00	1.72	1.83	.27	2.69	5.39	Green		22	T-22	2-13/16"
BBLU-060D		1/2"	1.75	1.72	3.00	.27	2.69	6.56					
BBLU-065D-2TC38	650 kcmil	3/8"	1.00	1.78	1.83	.27	2.81	5.51	Pink		300	T-300	2-15/16"
BBLU-065D		1/2"	1.75	1.78	3.00	.27	2.81	6.68					
BBLU-075D-2TC38	750 kcmil	3/8"	1.00	1.91	2.08	.27	2.88	5.93	Black		24	T-24	3"
BBLU-075D		1/2"	1.75	1.91	3.00	.27	2.88	6.85					
BBLU-080D	800 kcmil	1/2"	1.75	1.97	3.00	.25	2.94	7.00	Orange		25	T-25P	3-1/16"
BBLU-100D-2TC38	1000 kcmil	3/8"	1.00	2.17	2.08	.33	3.00	6.24	White		27	T-27P	3-1/8"
BBLU-100D		1/2"	1.25	2.17	2.38	.33	3.00	6.50					
BBLU-100D1		1/2"	1.75	2.17	3.00	.33	3.00	7.16					
BBLU-150D	1500 kcmil	1/2"	1.37	2.68	2.50	.39	3.19	6.90	Green		31	T-31P	3-5/16"
BBLU-150D1		1/2"	1.75	2.69	3.00	.39	3.19	7.44					
BBLU-200D	2000 kcmil	1/2"	1.50	3.08	2.63	.46	3.44	7.38	Brown		34	-	3-9/16"
BBLU-200D1		1/2"	1.75	3.08	3.00	.47	3.44	7.78					

- Connectors from 8 AWG - 2000 kcmil are UL listed per UL486A-B and CSA certified per C22.2 No.65 for POWER applications
- Connectors from 8 AWG - 500 kcmil are UL listed for grounding, bonding and direct burial applications per UL467
- Connectors from 8 AWG - 250 kcmil are CSA certified for grounding, bonding and direct burial applications per C22.2 No.41