


Standard Barrel - One Hole Tongue with Inspection Window

Type BLU-S

- Manufactured from high conductivity seamless copper tubing
- Tin-plated to inhibit corrosion
- Beveled entry for easy cable insertion
- Inspection window to ensure full cable insertion
- Color coded barrels are marked with die index numbers
- Connectors are suitable for voltages up to 35 KV
- 45° and 90° angles are UL listed and CSA certified
- **Connectors are UL listed and CSA certified with Penn-Union, Burndy, T&B, Huskie, Greenlee and Versa-Crimp® style tooling**

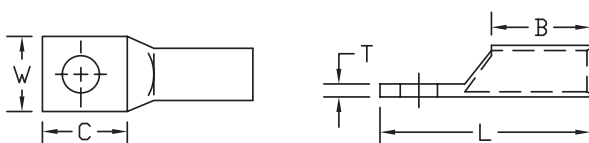

BLU-S

F

BLU-S DIMENSIONS & INSTALLATION TOOLING INFORMATION

CATALOG NUMBER	COPPER CONDUCTOR SIZE	STUD HOLE SIZE	FIGURE DIMENSIONS (IN.)					INSTALLATION TOOLING				WIRE STRIP LENGTH
			TONGUE WIDTH "W"	TONGUE LENGTH "C"	TONGUE THICKNESS "T"	BARREL LENGTH "B"	OVERALL LENGTH "L"	COLOR CODE	PENN-UNION DIELESS MECHANICAL TOOLS	BURNDY DIE INDEX NO. /TOOL	PENN-UNION DIE CATALOG NO.	
BLU-8S14	8 AWG	#10	.37	.50	.08	.41	1.09	Red	TDM-250 or TDM-500	6	T-49	1/2"
BLU-8S15		1/4"	.37	.56	.08	.41	1.14					
BLU-8S16A		5/16"	.60	.64	.07	.57	1.46					
BLU-8S17A		3/8"	.60	.64	.07	.58	1.52		-	Y644HS	-	11/16"
BLU-8S18A		1/2"	.70	1.00	.09	.57	1.72					
BLU-6S	6 AWG	#10	.41	.53	.09	.81	1.51	Blue	TDM-250 or TDM-500	7	T-7	15/16"
BLU-6S1		1/4"	.41	.69	.09	.81	1.67					
BLU-6S2		5/16"	.45	.75	.07	.82	1.78					
BLU-6S8		3/8"	.60	.88	.06	.81	1.97					
BLU-6S9+		1/2"	.70	.94	.08	.75	1.88		-	Y644HS	-	7/8"
BLU-5S	5 AWG	#10	.43	.56	.08	.81	1.61	Blue	TDM-250 or TDM-500	7	T-7	15/16"
BLU-5S1		1/4"	.43	.69	.08	.81	1.73					
BLU-5S2		5/16"	.61	.72	.06	.81	1.77					
BLU-5S3		3/8"	.61	.88	.06	.81	1.92					
BLU-4S	4 AWG	#10	.48	.56	.09	.81	1.61	Gray	TDM-250 or TDM-500	8	T-8	15/16"
BLU-4S1		1/4"	.48	.69	.09	.81	1.67					
BLU-4S10		5/16"	.48	.72	.09	.81	1.76					
BLU-4S2		3/8"	.60	.88	.08	.81	1.97					
BLU-4S4 +		1/2"	1.12	1.12	.13	.83	2.22					
BLU-3S	3 AWG	#10	.53	.56	.09	.88	1.67	White	TDM-250 or TDM-500	9	T-9	1"
BLU-3S1		1/4"	.53	.69	.09	.88	1.80					
BLU-3S2		5/16"	.53	.75	.09	.88	1.86					
BLU-3S3		3/8"	.59	.88	.08	.88	1.98					