
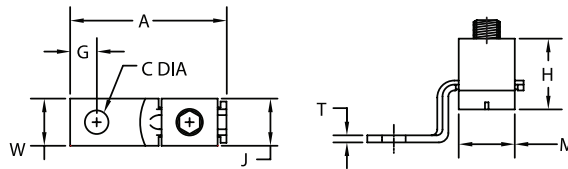


Copper Mechanical Lugs - One Hole, Single Collar

Types SLU and SAU

- Manufactured from electrolytic copper for maximum conductivity and strength
- Unique design of the concave pressure bar and V-bottom collar assures positive contact and firm permanent grip
- Offset tongue for joining a wide range of cable to equipment pads or bars
- Plated steel set screws resist corrosion
- For tin plating, suffix catalog number "-TN"



CATALOG NUMBER	COPPER CONDUCTOR RANGE	APPROXIMATE DIMENSIONS (IN.)								AMPERE RATING NEC
		A	W	G	C (DIA.)	T	M	H	J	
SLU-25†*	10 Str. - 14 Str.	.91	.31	.19	.16	.07	.28	.36	.25	25
SLU-35†	6 Str. - 14 Str.	1.31	.38	.23	.20	.07	.43	.50	.33	35-50
SAU-70†	4 Str. - 14 Str.	1.41	.50	.25	.27	.08	.43	.56	.38	70
SLU-70†	2 Str. - 8 Str.	1.55	.50	.25	.27	.09	.50	.65	.47	70-90
SLU-125	1/0 Str. - 8 Str.	1.97	.63	.50	.27	.13	.63	.88	.62	125
SLU-175	3/0 Str. - 4 Str.	2.19	.75	.44	.41	.13	.75	1.03	.71	175
SLU-225	4/0 Str. - 2 Str.	2.38	1.00	.47	.34	.13	1.00	1.17	.75	225
SLU-300	350 kcmil - 1/0 Str.	3.16	1.00	.50	.41	.19	1.23	1.39	1.00	300
SLU-400	500 kcmil - 1/0 Str.	4.25	1.50	.88	.41	.19	1.50	1.57	1.16	400
SLU-650	1000 - 600 kcmil	4.63	2.00	1.16	.53	.25	1.88	2.34	1.68	650

† Slotted screw

* UL listed and CSA certified