



# LED PAR30 S/L

## 10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.


### Product data

| General Information                   |                                    |
|---------------------------------------|------------------------------------|
| Base                                  | E26 [ Single Contact Medium Screw] |
| EU RoHS compliant                     | Yes                                |
| Nominal Lifetime (Nom)                | 25000 h                            |
| Switching Cycle                       | 25000X                             |
| Technical Type                        | 10-75W                             |
| Light Technical                       |                                    |
| Color Code                            | 830 [ CCT of 3000K]                |
| Beam Angle (Nom)                      | 25 °                               |
| Initial lumen (Nom)                   | 850 lm                             |
| Luminous Intensity (Nom)              | 3300 cd                            |
| Color Designation                     | White (WH)                         |
| Correlated Color Temperature (Nom)    | 3000 K                             |
| Luminous Efficacy (rated) (Nom)       | 85.00 lm/W                         |
| Color Consistency                     | <6                                 |
| Color Rendering Index (Nom)           | 80                                 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %                               |
| Operating and Electrical              |                                    |
| Input Frequency                       | 50 to 60 Hz                        |
| Power (Rated) (Nom)                   | 10 W                               |
| Lamp Current (Nom)                    | 86 mA                              |
| Wattage Equivalent                    | 75 W                               |

| Starting Time (Nom)             | 0.5 s                                   |
|---------------------------------|-----------------------------------------|
| Warm Up Time to 60% Light (Nom) | 0.5 s                                   |
| Power Factor (Nom)              | 0.9                                     |
| Voltage (Nom)                   | 120 V                                   |
| Temperature                     |                                         |
| T-Case Maximum (Nom)            | 70 °C                                   |
| Controls and Dimming            |                                         |
| Dimmable                        | Yes                                     |
| Approval and Application        |                                         |
| Suitable For Accent Lighting    | Yes                                     |
| Product Data                    |                                         |
| XUCDM.COPY.Product.Title        | 10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB |
| EAN/UPC - Product               | 046677529772                            |
| Order code                      | 529776                                  |
| Numerator - Quantity Per Pack   | 1                                       |
| Numerator - Packs per outer box | 6                                       |
| Material Nr. (12NC)             | 929001320504                            |
| Net Weight (Piece)              | 0.220 kg                                |

LED PAR30 S/L



Dimensional drawing



Classic PAR30S 120V 9-75W 850lm 25D 3000


| Product                                 | D     | C     |
|-----------------------------------------|-------|-------|
| 10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB | 94 mm | 93 mm |

Photometric data

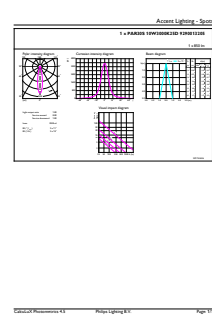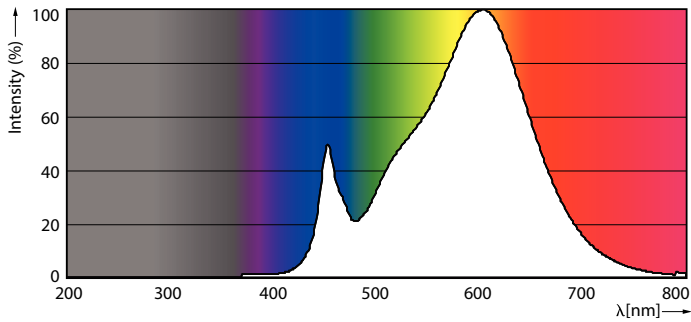

10-75W E26 PAR30S


10-75W E26 PAR30S 25D 830 3000K




10-75W E26 PAR30S 25D 830 3000K

LED PAR30 S/L

Lifetime

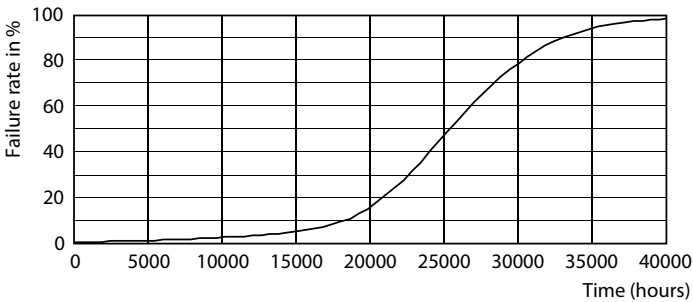

14-120W E26 PAR38

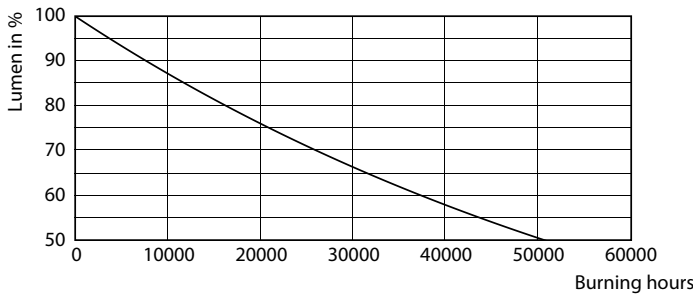

14-120W E26 PAR38

