



LED Glass HID lamps

14GC/LED/850/ND E26 BB 6/1

Philips Glass HID lamps offer you an easy, short-payback LED solution to replace High Intensity Discharge (HID) lamps. Thanks to our High-Power LED filament technology, this new generation of indoor/outdoor glass lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while providing instant savings with a low initial investment. They are designed to have the same aesthetics, lamp size and light distribution as the HID lamps they are replacing, so the upgrade to LED is easier than ever!

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	25,000 hour(s)
Switching Cycle	15,000
Lighting Technology	LED

Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	2,000 lm
Luminous Efficacy (rated) (Nom)	142.00 lm/W
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz

Power Consumption	14 W
Lamp Current (Nom)	126.5 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	120-277 V
UL Type	HIB_UL Type B (UL Listed+Classified)

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	50.4 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Bulb Shape	ED75

LED Glass HID lamps

Approval and Application

EU RoHS compliant Yes

Application Conditions

can it be used in closed luminaires Yes

Product Data

Order product name 14GC/LED/850/ND E26 BB 6/1
 Full product name 14GC/LED/850/ND E26 BB 6/1

Order code 929003507604

Material Nr. (12NC) 929003507604

Numerator - Quantity Per Pack 1


Net Weight (Piece) 0.136 kg

EAN/UPC - Product/Case 046677578831

Numerator - Packs per outer box 6



EAN/UPC - Case 50046677578836

Dimensional drawing




Product	D	C
14GC/LED/850/ND E26 BB 6/1	76 mm	183 mm

Photometric data



Light Distribution Diagram - 14GC/LED/850/ND E26 BB 6/1


General uniform lighting - 14GC/LED/850/ND E26 BB 6/1

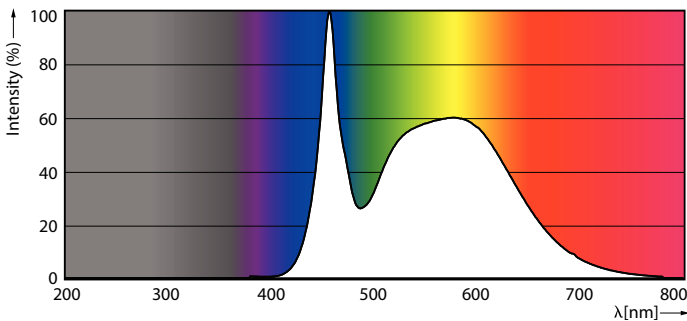

Spectral Power Distribution Colour - 14GC/LED/850/ND E26 BB 6/1

LED Glass HID lamps

Lifetime

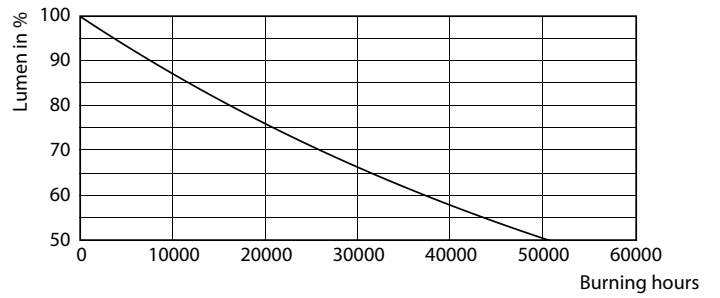

Life Expectancy Diagram

Lumen Maintenance Diagram - 14GC/LED/850/ND E26 BB 6/1

