



MasterColor CDM-T T6

MasterColor CDM-T 35W/842 T6

MasterColor CDM lamp gives a unique combination of unbeatable light quality and consistent performance over lifetime while keeping running costs low. The Philips MasterColor Tubular Single-Ended T6 lamp is a compact, energy efficient, ceramic metal halide lamp that provides crisp, sparkling light.

Product data

General Information	
Cap-Base	G12 [G12]
Operating Position	Universal [Universal]
Life To 5% Failures (Nom)	9000 h
Life To 10% Failures (Nom)	10000 h
Life To 20% Failures (Nom)	11000 h
Life To 50% Failures (Nom)	12000 h
ANSI Code HID	-
Light Technical	
Color Code	842 [CCT of 4200K]
Luminous Flux (Rated) (Nom)	3100 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	70 %
Lumen Maintenance 2000 h (Min)	80 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Min)	75 %
Lumen Maintenance 5000 h (Nom)	85 %
Chromaticity Coordinate X (Nom)	0.365
Chromaticity Coordinate Y (Nom)	0.364
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	79 lm/W

Color Rendering Index (Nom)	84
Operating and Electrical	
Power (Rated) (Min)	39.0 W
Power (Rated) (Nom)	35 W
Lamp Current Run-Up (Max)	0.720 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Peak Voltage (Min)	3500 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	93 V
Voltage (Min)	77 V
Voltage (Nom)	85 V
Controls and Dimming	
Dimmable	No
Run-Up Time 90% (Max)	3 min

MasterColor CDM-T T6


Mechanical and Housing	
Bulb Finish	Clear (CL)
Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	2.7 mg
Energy Consumption kWh/1000 h	41 kWh
UV	
Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.5
Luminaire Design Requirements	
Bulb Temperature (Max)	500 °C

Cap-Base Temperature (Max)	280 °C
Pinch Temperature (Max)	350 °C
Product Data	
Order product name	MasterColor CDM-T 35W/842 T6
EAN/UPC - Product	046677208868
Order code	208868
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928099805115
Net Weight (Piece)	0.028 kg
ILCOS Code	MT/UB-35/842-H-G12-20/90

Warnings and Safety

- R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)


Dimensional drawing



CDM-T 35W/842 G12

Product	D (max)	D	O	L (min)	L (max)	L	C (max)
MasterColor CDM-T 35W/842 T6	20 mm	0.75 in	5 mm	55 mm	57 mm	56 mm	103 mm

Photometric data

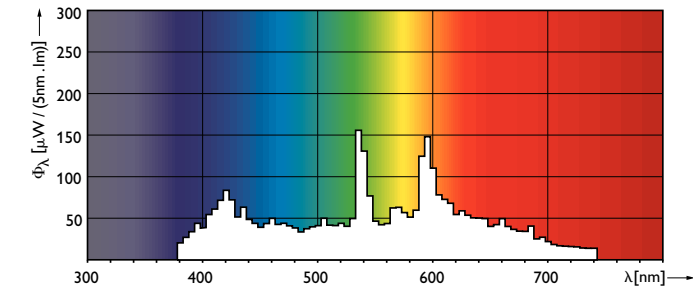

MASTERColour CDM-T 35W /842

MasterColor CDM-T T6

