

Slim LED Ceiling light with occupancy sensor that automatically detects motion and turns light On and Off.



### APPLICATIONS

**Ideal for utility rooms, work rooms, storage rooms, laundry rooms, and other small spaces.**

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

### SPECIFICATIONS

#### Construction

Durable thermoplastic housing with built in occupancy sensor. Four mounting holes on housing to position for maximum coverage.

#### Optics

The fixture delivers a total output of 956 lumens at an efficacy of 80 lumens per watt. LEDs have a colour temperature of 4000K natural white. The fixture is ideal for indoor use. LED life of 50,000 hours.

#### Electrical

Total system wattage of the unit is 12W measured, 14W maximum. The driver operates at 120V.

#### Mounting

Four mounting holes on housing to position the fixture.

#### Finish

Standard finish is white.

#### Sensor

No wall switch needed, occupancy sensor automatically detects motion and turns light on. Light is turned off after one minute once room is vacated.

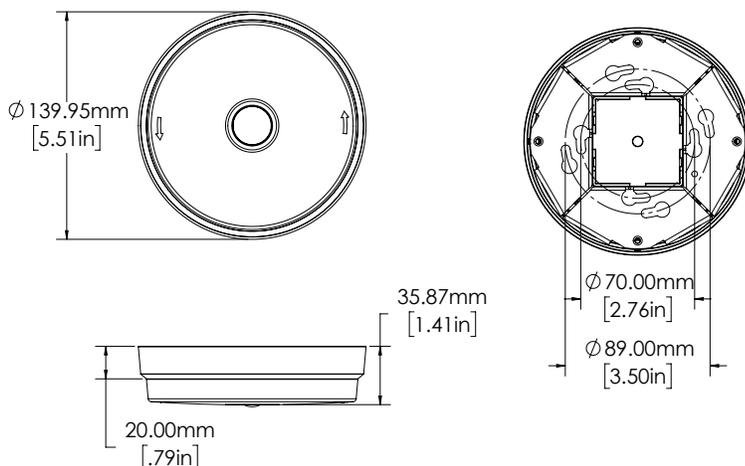
#### The SpaceLite meets NFPA: NFPA 70, NEC section 410.16, C (1) Requirements.

Note to installers: The minimum clearance between luminaires installed in clothes closets and the nearest point of a closet storage space shall be 300 mm (12 in.) for surface-mounted incandescent or LED luminaires with a completely enclosed light source installed on the wall above the door or on the ceiling.


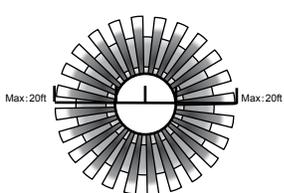

<b>Input Watts</b>	<b>12W measured 14W maximum</b>
<b>Lumens</b>	<b>956</b>
<b>Efficacy</b>	<b>80 lumens/watt</b>

<b>Warranty</b>	<b>5 Years</b>
<b>Colour Temperature</b>	<b>4000K (natural white)</b>
<b>Operating Temp.</b>	<b>-30°C to + 40°C</b>
<b>LED life</b>	<b>50,000 hours</b>
<b>Voltage</b>	<b>120V</b>
<b>Power Factor</b>	<b>0.99</b>
<b>CRI</b>	<b>&gt;80</b>
<b>THD</b>	<b>&lt;20%</b>

### DIMENSIONS



SENSOR INFORMATION

 <p>Height of installation 8~12ft</p>	 <p>(Height of installation 8ft) Detection range</p>	 <p>Detection angle</p>	<p><b>SENSOR SPECS</b></p> <p><b>Detection angle:</b> 360°</p> <p><b>Detection Range:</b> 20ft (radii.)</p> <p><b>Time:</b> 1 min</p> <p><b>Light Control:</b> 24H Lux</p>
--	---	--	--

ORDERING GUIDE

<b>SPLR1</b>	-	<b>LED12</b>	-	<b>A</b>	-	<b>4K</b>	-	<b>SMS</b>
				<b>VOLTAGE</b>		<b>COLOUR TEMP</b>		<b>MOTION SENSOR</b>
				<b>A - 120V</b>		<b>NW - (natural white) 4000K</b>		<b>SMS - Motion Sensor</b>

\* Standard configuration