



WP-LED120

LED Wall Light

SPECIFICATIONS*

Watts	118.71
Lumens	13,984
Efficacy	117.8
Replaces Up To	250W MH
Colour Temp	5,000K*
Operating Temp	-40°C to +40°C
Voltage	120-277*, 347
LED Life	100,000 hours
Lens Material	Clear Stippled Tempered Glass
Power Factor	0.916
Total Harmonic Distortion	15.3%
CRI	71.1

*Standard



DESCRIPTION

The WP-LED fixtures are energy efficient wall lights with a traditional look. Available in 3 wattages (42W, 80W, 120W), they serve as ideal replacements for 150W, 250W or 400W HID fixtures.

APPLICATIONS



Entrances



Back Doors



Loading Docks



Perimeter Lighting

FEATURES

- Side hinged die cast aluminum body.
- Replaces 400W MH wall packs.
- Clear stippled tempered glass lens.
- Durable powder coat paint finish.
- Photocell optional.

OTHER MODEL SPECIFICATIONS

MODEL DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT	CRI
WP-LED120-B-4K-XXX-XX	120-277	118.71	13984	117.8	15.3	0.916	4000	71.1
WP-LED120-B-5K-XXX-XX	120-277	118.71	13984	117.8	15.3	0.916	5000	71.1
WP-LED120-C-4K-XXX-XX	347	117.6	13970.9	118.8	10.5	0.936	4000	71.3
WP-LED120-C-5K-XXX-XX	347	117.6	13970.9	118.8	10.5	0.936	5000	71.3

LEGEND



B - 120V-277V, C - 347V

4K - 4000K, 5K - 5000K

XXX - HOUSING FINISH

XX - CL (CLEAR LENS)

DIMENSIONS

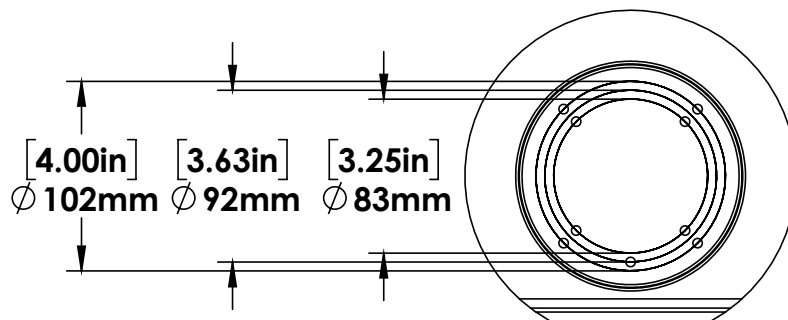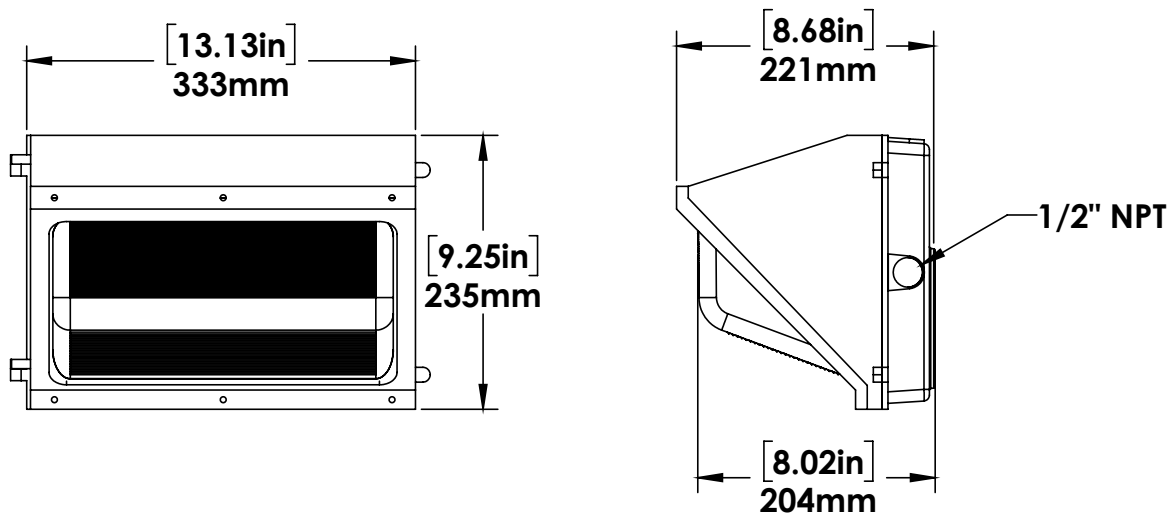

Weight = 7lbs

JUNCTION BOX MOUNTING HOLE PATTERN

ORDERING GUIDE

WP						
WATTS	VOLTAGE	COLOUR TEMP.	FINISH	LENS TYPE	OPTIONS	
LED120	B - 120 - 277V*	4K - 4000K	BRZ - BRONZE*	CL - C LEAR	PC - PHOTOCELL	
	C - 347V	5K - 5000K*	CC - CUSTOM COLOUR			

*Standard Configuration.