



# SL4-LED30

## LED Strip Light



### SPECIFICATIONS\*

Watts	32
Lumens	4,017
Efficacy	125
Replaces Up To	2 Lamp T8 32 W
Colour Temp**	Variable - 3K, 4K, 5K
Certification	cULus, IP20, DLC
Operating Temp	-30°C to +40°C
Voltage	120-277*, 347
LED Life	50,000 hours
Housing Material	Steel
Lens Material	Polycarbonate
Lens Type	Frosted
Mounting	Surface mount, suspended mounting using linear ceiling pendant mount kit.
Total Harmonic Distortion	9.05
Power Factor *Standard	0.993

\*\*Colour temperature is variable and can be changed on the fixture with a switch. The default switch setting is set to 4K on the fixture. Light output varies according to the colour temperature selected as seen in the spec table on page 2.



## DESCRIPTION

The SL4-LED30 strip light provides a highly efficient lumen output of approx. 4000 lumens ideal for replacing 2 lamp T8 32W fixtures. The frosted linear lens provides uniform light distribution ideal for use in shops, coves and general area lighting.

## APPLICATIONS



Shops



Cove Lighting



General Area  
Lighting

## FEATURES

- Fixture can be set at a color temperature of 3000K, 4000K or 5000K through a switch inside the housing
- Narrow, linear design with frosted lens for uniform light distribution
- Join up to 25 fixtures on a single circuit using easy connector steel plates.
- Options: dimming high frequency sensor, wire cage, reflector wings, linear ceiling pendant mount kit

\*The above specs apply to the standard product configuration. For spec information on other product configurations please see page 2.

## OTHER MODEL SPECIFICATIONS

DESCRIPTION	VOLTAGE (V)	INPUT POWER (W)	LIGHT OUTPUT	EFFICACY (Lm/W)	THD	PF	CCT	CRI
SL4-LED30-B-VK-DIM	120-277	32.2	3600.2	111.7	9.27	0.9936	2908	83
	120-277	32.2	4017	124.7	9.05	0.9931	3854	85
	120-277	32.6	3913	120.2	8.98	0.9936	5046	82.5
SL4-LED30-C-VK-DIM	347	32.9	3729.7	113.3	11.23	0.9429	2906	83
	347	32.9	4153	126.0	8.56	0.9448	3884	84.9
	347	32.7	3930	120.2	8.15	0.9425	5057	82.6

### LEGEND


B - 120V-277V, C - 347V

3K - 3000K, 4K - 4000K, 5K - 5000K


Colour temperature is variable and can be changed on the fixture with a switch.  
Light output varies according to the colour temperature selected as seen in above table.

DIM - DIMMABLE


## DIMENSIONS

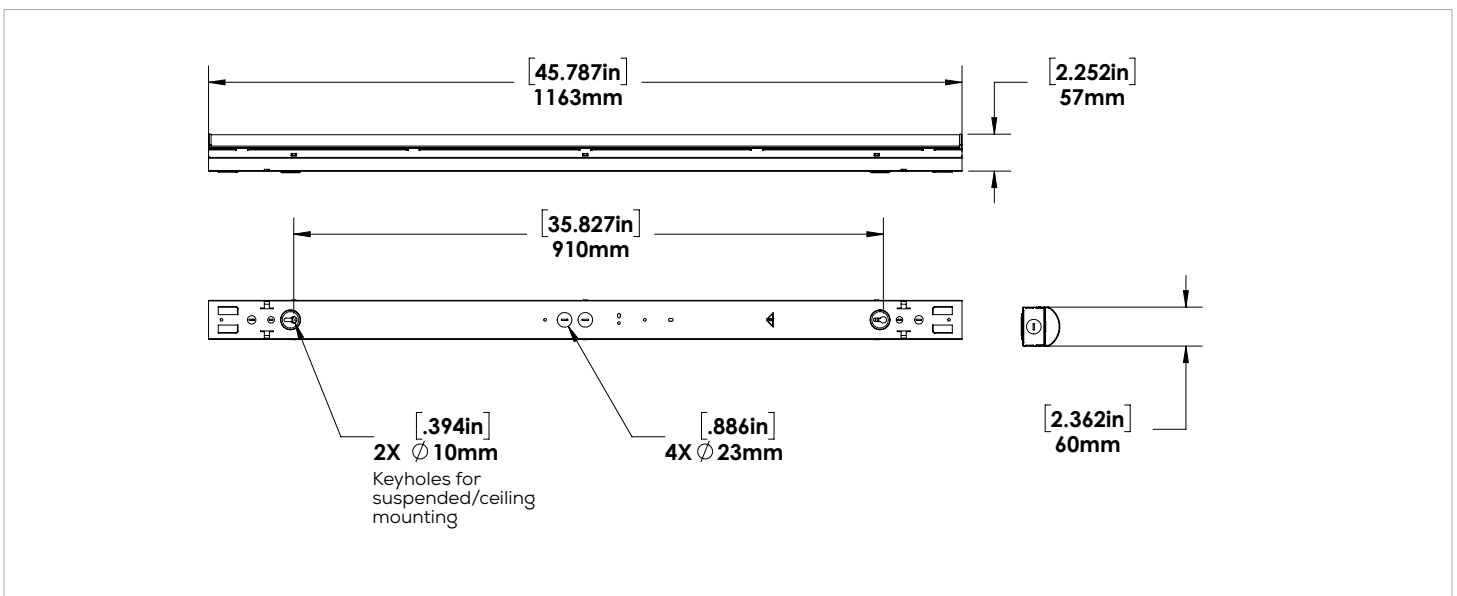

## COLOUR TUNABLE SWITCH

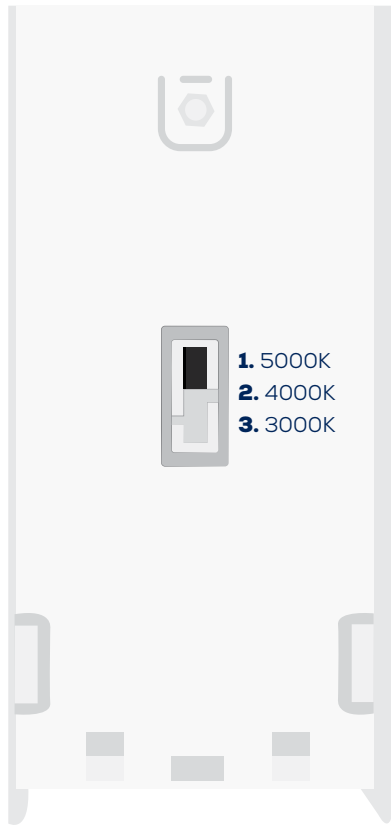

The switch is located inside of the fixture.

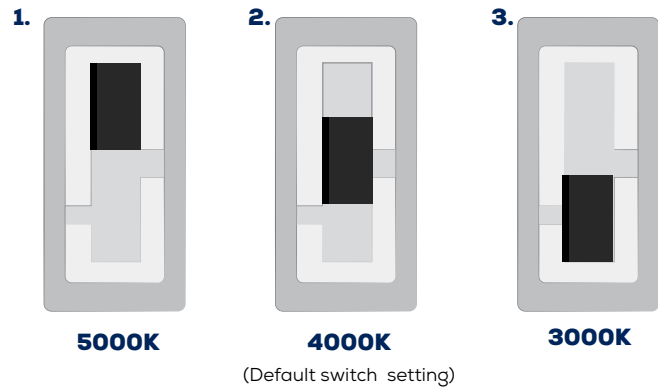

**Easily change the colour temperature with the flip of a switch.**

- 1. TOP position = 5000K**
- 2. MIDDLE position = 4000K**
- 3. BOTTOM position = 3000K**

## ACCESSORIES

### Linear Ceiling Pendant Mount Kit

Contains 2 x 5 foot aircraft cables with ceiling mounting plates, fixture mounting rod and nut, 6 drywall anchors, and 6 screws.


SKU 089814




## ACCESSORIES



**Reflector Wings Kit** - Wings attach by inserting tabs into the cutouts on the fixture.  
SKU 099513

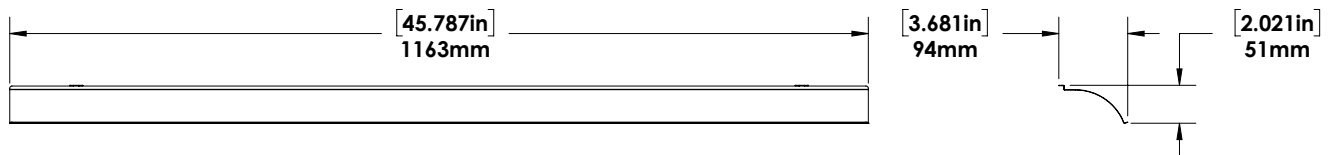

**Wings dimensions**

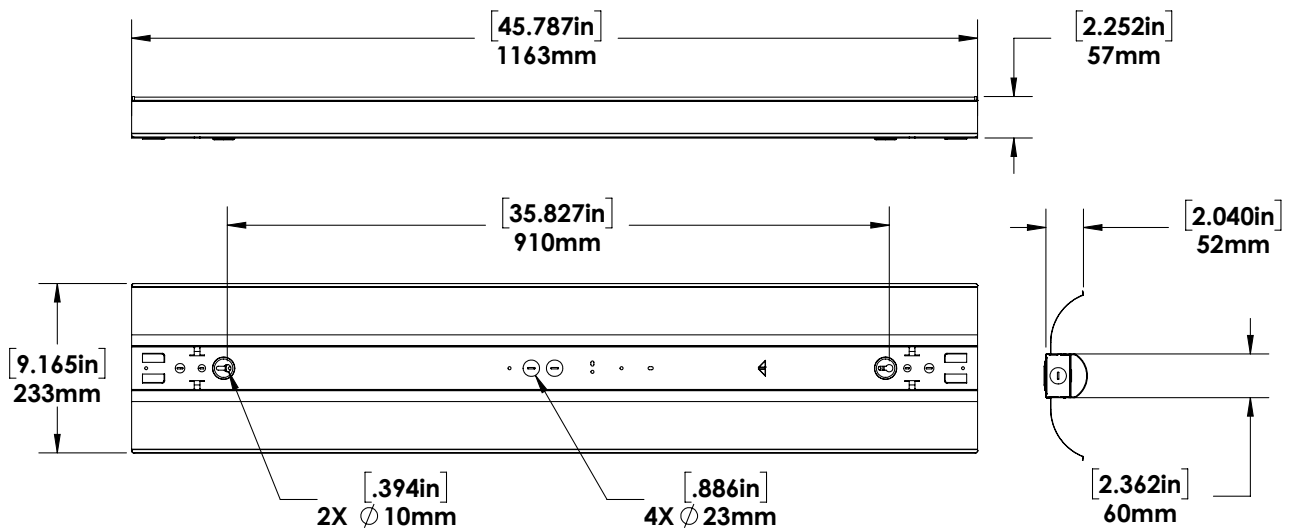


**Wings on fixture dimensions**

## ACCESSORIES

### Extension Box for Sensor


High frequency motion sensor is installed inside extension box. Motion sensor can be attached to a single fixture and connected to a row of up to 10 fixtures.

Sensor will be added in the factory.

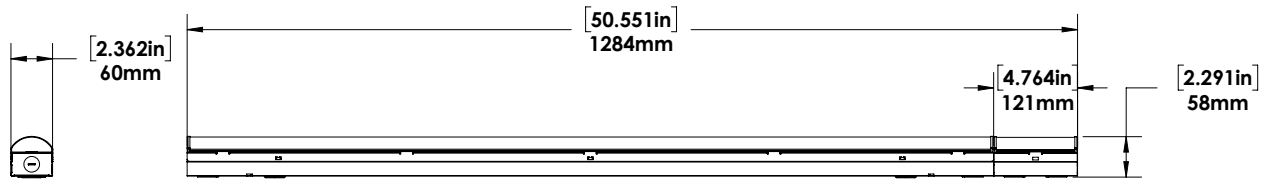

**Extension Box for Sensor - Dimensions**




## WIRE CAGE

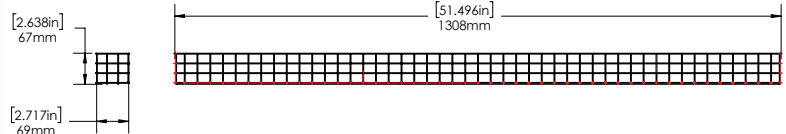

**Wire Cage** - Wire cage has been designed to accommodate the motion sensor box. To install, place wire cage over the fixture and screw the clips on to the mounting surface. SL4 has 8 clips.

SKU 02269

## CANDELA PLOTS

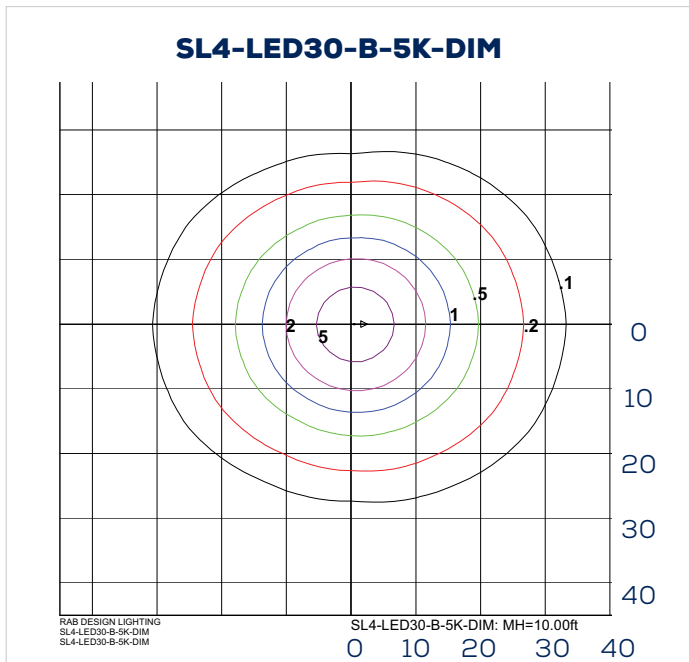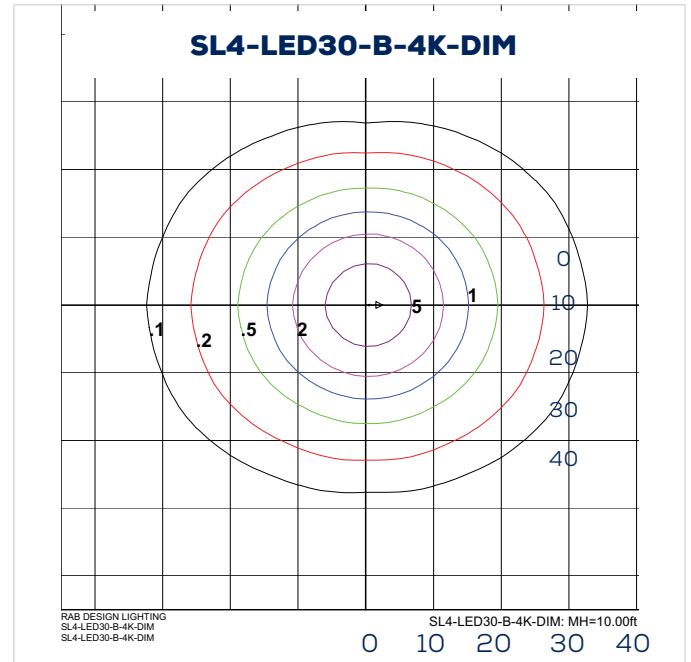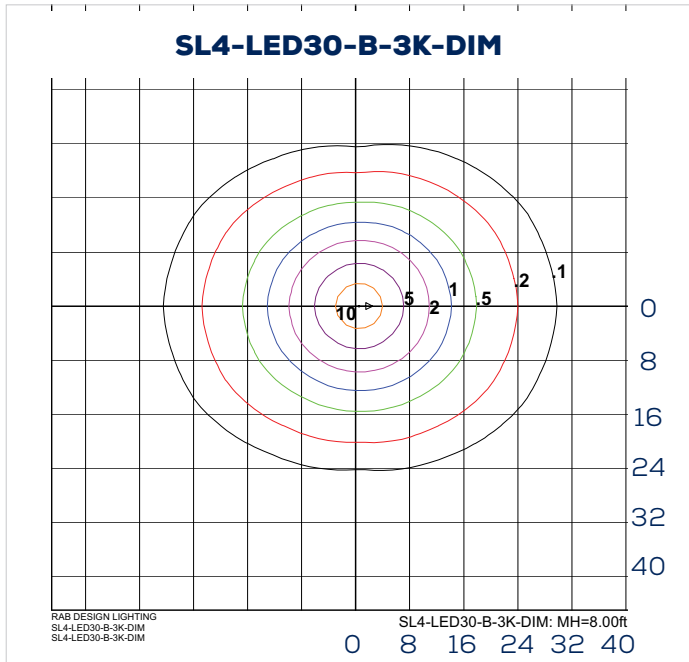

## ORDERING GUIDE

SL4	LED30				
WATTS	VOLTAGE	COLOUR TEMP.	DRIVER	OPTIONS	
	B - 120 - 277V*	VK - COLOUR TUNABLE (can be changed to 3K, 4K, or 5K)	DIM - DIMMABLE DRIVER 0-10V*	DHFS - Dimming High Frequency Sensor	
	C - 347V				

\*Standard Configuration.

## FIELD INSTALLED ACCESSORIES

### CHECK THE ACCESSORIES YOU WISH TO ORDER:

002269 SL4-LED WIRE CAGE

089814 LINEAR CEILING PENDANT MOUNT KIT

099513 SL4-LED REFLECTOR WINGS KIT - WHT