

# Halogen Lamps

STANDARD®



# Full line of premium quality, professional grade halogen lamps


Halogen lamps are designed to provide crisp white light, long life and constant lumen maintenance.

The use of halogen gas enables the filament to burn slower and to operate at a higher temperature; which allows for a whiter and brighter light output. Halogen also allows for longer life and more lumens per watt making halogen lamps more efficient than regular incandescent lamps.

The crisp white light of the halogen reflects very nicely on crystal, making it sparkle and enhancing the property of crystal chandeliers.

Halogen lamps are dimmable and can be used in the most compact and stylish fixture designs.

Many STANDARD halogen lamps do have a coating that filters UV rays; but it doesn't apply to all of them, look for the icon that identifies them.

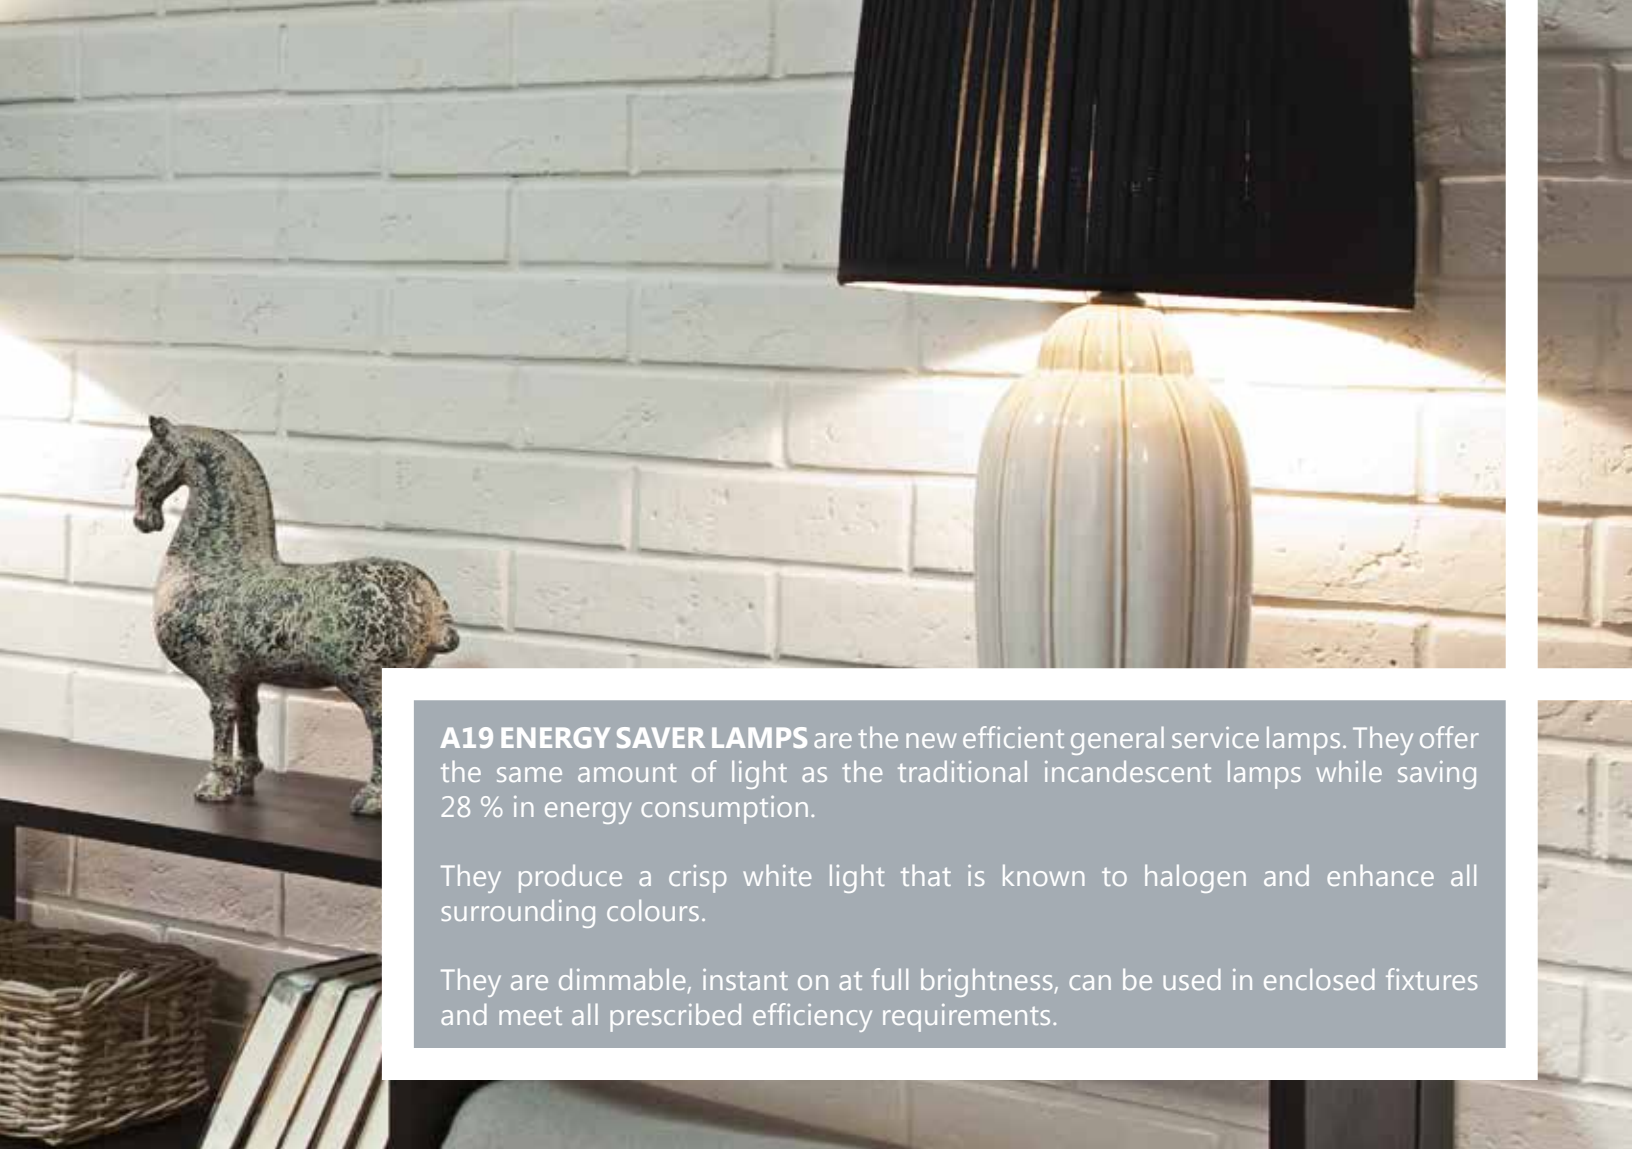

**A19 ENERGY SAVER LAMPS** are the new efficient general service lamps. They offer the same amount of light as the traditional incandescent lamps while saving 28 % in energy consumption.

They produce a crisp white light that is known to halogen and enhance all surrounding colours.

They are dimmable, instant on at full brightness, can be used in enclosed fixtures and meet all prescribed efficiency requirements.



A19

| Order code | Description | Watts (W) | Base | Volts (V) | Finish | Average life (hours) | Initial lumens (lm) | Operating burn position | Incan. equivalent (W) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|
| **A19** | | | | | | | | | | |
| MOL : 4 ¼ in. (108 mm) | Dia. : 2 ⅜ in. (60 mm) | | | | | | | | | |
| [1]62794 | H29/A19/CL/120V/STD | 29 | E26 | 120 | Clear | 1 000 | 400 | Universal | 40 | 100 |
| [1]62795 | H43/A19/CL/120V/STD | 43 | E26 | 120 | Clear | 1 000 | 750 | Universal | 60 | 100 |
| [1]62796 | H53/A19/CL/120V/STD | 53 | E26 | 120 | Clear | 1 000 | 1 050 | Universal | 75 | 100 |
| [1]62797 | H72/A19/CL/120V/STD | 72 | E26 | 120 | Clear | 1 000 | 1 490 | Universal | 100 | 100 |
| [1]62798 | H29/A19/FR/120V/STD | 29 | E26 | 120 | Frost | 1 000 | 400 | Universal | 40 | 100 |
| [1]62799 | H43/A19/FR/120V/STD | 43 | E26 | 120 | Frost | 1 000 | 750 | Universal | 60 | 100 |
| [1]62800 | H53/A19/FR/120V/STD | 53 | E26 | 120 | Frost | 1 000 | 1 050 | Universal | 75 | 100 |
| [1]62801 | H72/A19/FR/120V/STD | 72 | E26 | 120 | Frost | 1 000 | 1 490 | Universal | 100 | 100 |

*Not suitable for use in damp locations or outdoors when exposed to weather.*

*[1]Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.*

INSTANT ON ENERGY SAVING DIMMABLE C US

# A19 Energy Saver Lamps





**The ECO PAR Series** provides a high quality, crisp white light. These lamps offer the same performance as traditional halogen PAR lamps while saving up to 30% in energy. With a defined directional beam, the lamps of the ECO PAR Series will add depth and texture to your decor.

PAR20



PAR30



PAR30LN



PAR38



| Order code | Description | Watts (W) | Base | Volts (V) | Reflector Finish | Average life (hours) | Initial lumens (lm) | Operating burn position | Beam angle (°C) | Beam spread | CBCP (cd) | Incan. equivalent (W) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR20** | | | | | | | | | | | | | |
| MOL : 3 ⅛ in. (79 mm) Dia. : 2 ½ in. (63 mm) | | | | | | | | | | | | | |
| 63797 | H35/PAR20/ECO/NFL/120V/STD | 35 | E26 | 120 | Aluminum | 2 000 | 500 | Universal | 25 | Narrow Flood | 850 | 50 | 15 |
| **PAR30** | | | | | | | | | | | | | |
| MOL : 3 17/32 in. (90 mm) Dia. : 3 ¾ in. (95 mm) | | | | | | | | | | | | | |
| 63798 | H35/PAR30/ECO/FL/120V/STD | 35 | E26 | 120 | Silver | 2 000 | 500 | Universal | 30 | Flood | 900 | 50 | 15 |
| [1]63799 | H60/PAR30/ECO/FL/120V/STD | 60 | E26 | 120 | Silver | 1 500 | 1 070 | Universal | 30 | Flood | 1 100 | 75 | 15 |
| **PAR30LN** | | | | | | | | | | | | | |
| MOL : 4 11/16 in. (119 mm) Dia. : 3 ¾ in. (95 mm) | | | | | | | | | | | | | |
| 63800 | H35/PAR30LN/ECO/FL/120V/STD | 35 | E26 | 120 | Silver | 2 000 | 500 | Universal | 30 | Flood | 900 | 50 | 15 |
| [1]63801 | H60/PAR30LN/ECO/FL/120V/STD | 60 | E26 | 120 | Silver | 1 500 | 1 070 | Universal | 30 | Flood | 1 100 | 75 | 15 |
| **PAR38** | | | | | | | | | | | | | |
| MOL : 5 3/16 in. (132 mm) Dia. : 4 13/16 in. (60 mm) | | | | | | | | | | | | | |
| [1]63802 | H60/PAR38/ECO/FL/120V/STD | 60 | E26 | 120 | Silver | 1 500 | 1 070 | Universal | 30 | Flood | 1 100 | 75 | 15 |
| [1]63803 | H70/PAR38/ECO/FL/120V/STD | 70 | E26 | 120 | Silver | 1 500 | 1 301 | Universal | 30 | Flood | 2 000 | 90 | 15 |

*Not suitable for use in damp locations or outdoors when exposed to weather.*
*[1]Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.*




# Energy Saving PAR Lamps





**The Long life PAR series** lasts approximately 4 years[1], which is twice as long as traditional halogen lamps. Reducing lamp replacement frequency and therefore minimizing relamping costs.

This series can easily be adapted to many decors, whether residential or commercial. Long Life PAR lamps provide a crisp white light for which halogen lamps are known and appreciated.



PAR20



PAR30



PAR30LN



PAR38



| Order code | Description | Watts (W) | Base | Volts (V) | Reflector Finish | Average life (hours) | Initial lumens (lm) | Operating burn position | Beam angle (°C) | Beam spread | CBCP (cd) | Incan. equivalent (W) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR20** | | | | | | | | | | | | | |
| MOL : 3 ⅛ in. (79 mm) Dia. : 2 ½ in. (63 mm) | | | | | | | | | | | | | |
| 63790 | H42/PAR20/HIR/NFL/120V/STD | 42 | E26 | 120 | Aluminum | 4 000 | 700 | Universal | 30 | Narrow Flood | 400 | 50 | 15 |
| **PAR30** | | | | | | | | | | | | | |
| MOL : 3 17/32 in. (90 mm) Dia. : 3 ¾ in. (95 mm) | | | | | | | | | | | | | |
| 63791 | H42/PAR30/HIR/FL/120V/STD | 42 | E26 | 120 | Aluminum | 4 000 | 700 | Universal | 35 | Flood | 300 | 50 | 15 |
| 63792 | H53/PAR30/HIR/FL/120V/STD | 53 | E26 | 120 | Aluminum | 4 000 | 1 000 | Universal | 35 | Flood | 900 | 75 | 15 |
| **PAR30LN** | | | | | | | | | | | | | |
| MOL : 4 11/16 in. (119 mm) Dia. : 3 ¾ in. (95 mm) | | | | | | | | | | | | | |
| 63793 | H42/PAR30LN/HIR/FL/120V/STD | 42 | E26 | 120 | Aluminum | 4 000 | 700 | Universal | 35 | Flood | 300 | 50 | 15 |
| 63794 | H53/PAR30LN/HIR/FL/120V/STD | 53 | E26 | 120 | Aluminum | 4 000 | 1 000 | Universal | 35 | Flood | 900 | 75 | 15 |
| **PAR38** | | | | | | | | | | | | | |
| MOL : 5 3/16 in. (132 mm) Dia. : 4 13/16 in. (60 mm) | | | | | | | | | | | | | |
| 63795 | H53/PAR38/HIR/FL/120V/STD | 53 | E26 | 120 | Aluminum | 4 000 | 1 000 | Universal | 35 | Flood | 900 | 75 | 15 |
| 63796 | H71/PAR38/HIR/FL/120V/STD | 71 | E26 | 120 | Aluminum | 4 000 | 1 350 | Universal | 35 | Flood | 1 100 | 90 | 15 |

[1]*Based on an average daily usage of 3 hours.*
*Not suitable for use in damp locations or outdoors when exposed to weather.*




# Long Life PAR Lamps



*Traditional light*




*Neodymium light*

**NEODYMIUM** glass is made with rare earth metallic trivalent element called neodymium which filters the dull yellow emission given off from ordinary lamps, resulting in more vibrant colours, as if exposed in natural light.

The neodymium is baked in the glass and will therefore not flake off over lamp life.

Neodymium glass eliminates glare reducing eye strain and is also known for producing a light that is excellent to maintain morale and high energy.

MR16 (GU5.3) 

ES16 (GU10) 

PAR20 

PAR30 

| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **ES16** | | | | | | | | | | | |
| MOL : 2 9/32 in. (58 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | |
| 60872 | H50GU10/FL/N/3M/130V/STD | 50 | GU10 | 130 | Neo. | 35 | Flood | 1 800 | 3 000 | 410 | 100 |
| **MR16** | | | | | | | | | | | |
| MOL : 1 13/16 in. (46 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | |
| 60871 | H50MR16/FL/N/CG/2M/GU5.3/12V/STD | 50 | GU5.3 | 12 | Neo. | 38 | Flood | 1 400 | 2 000 | 550 | 120 |
| **PAR20** | | | | | | | | | | | |
| MOL : 3 7/32 in. (82 mm) Dia. : 2.5 in. (63.5 mm) | | | | | | | | | | | |
| *57331[1] | H50PAR20/NFL/N/CL/2M/120V/STD | 50 | E26 | 120 | Neo. | 30 | Narrow Flood | 1 050 | 2 000 | 500 | 15 |
| **PAR30** | | | | | | | | | | | |
| MOL : 3 21/32 in. (93 mm) Dia. : 3 3/4 in. (95 mm) | | | | | | | | | | | |
| *58360[1] | H75PAR30/FL/N/2M/130V/STD | 75 | E26 | 130 | Neo. | 30 | Flood | N/A | 2 000 | 1 000 | 15 |

DIMMABLE UV STOP

*[1]This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*
** Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.*

# Neodymium Lamps

Use **COLOURED BACK MR16 LAMPS** to create a beautiful decorative effect. They are ideal for use in coloured fixtures where the lamp is visible. Improve aesthetics without compromising quality of light.

MR16 (GX5.3) 

MR16 (GX5.3) 

MR16 (GX5.3) 

MR16 (GX5.3) 

| Order code | Description | ANSI code | Watts (W) | Base | Volts (V) | Colour/ Finish | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **MR16 - Cover Glass** | | | | | | | | | | | | |
| MOL : 1 25/32 in. (45 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | | |
| 55029 | H50MR16/FL/WH/CG/3M/GX5.3/12V/STD | EXN/CG | 50 | GX5.3 | 12 | White | 38 | Flood | 1 600 | 3 000 | 850 | 100 |
| 55030 | H50MR16/FL/GLD/CG/3M/GX5.3/12V/STD | EXN/CG | 50 | GX5.3 | 12 | Gold | 38 | Flood | 1 600 | 3 000 | 850 | 100 |
| 55031 | H50MR16/FL/SLV/CG/3M/GX5.3/12V/STD | EXN/CG | 50 | GX5.3 | 12 | Silver | 38 | Flood | 1 600 | 3 000 | 850 | 100 |
| 55032 | H50MR16/FL/BLK/CG/3M/GX5.3/12V/STD | EXN/CG | 50 | GX5.3 | 12 | Black | 38 | Flood | 1 600 | 3 000 | 850 | 100 |



**THE UNI-FROST**™ series are design oriented lamps that set themselves apart by using a fully frosted cover as well as a fully frosted reflector to let light shine in all directions. Conventional dichroic reflector lamps can cause colour changes or disruptive patterns on glass fixtures.

MR16 (GU5.3) 

ES16 (GU10) 

| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **MR16 - Cover Glass** | | | | | | | | | | | |
| MOL : 1 25/32 in. (45 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | |
| 57210 | H35MR16/CG/4M/GU5.3/12V/STD UFR | 35 | GU5.3 | 12 | Frost | N/A | N/A | N/A | 4 000 | 470 | 200 |
| 57211 | H50MR16/CG/4M/GU5.3/12V/STD UFR | 50 | GU5.3 | 12 | Frost | N/A | N/A | N/A | 4 000 | 750 | 200 |
| **ES16 - Cover Glass** | | | | | | | | | | | |
| MOL : 2 5/32 in. (110 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | |
| 57212* | H35GU10/CG/2.5M/120V/STD UFR | 35 | GU10 | 120 | Frost | N/A | N/A | N/A | 2 500 | 330 | 100 |
| 57213* | H50GU10/CG/2.5M/120V/STD UFR | 50 | GU10 | 120 | Frost | N/A | N/A | N/A | 2 500 | 520 | 200 |
| 57801* | H50GU10/CG/3M/130V/STD UFR | 50 | GU10 | 130 | Frost | N/A | N/A | N/A | 3 000 | 390 | 200 |







# Coloured Back & UNI-FROST™



The frosted lens on **ICE LAMPS** provide soft no glare illumination, eliminating dark lines and shadows.




| Order code | Description | Watts (W) | Base | Volts (V) | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|
| **ES16** | | | | | | | | | | |
| MOL : 2 5/32 in. (55 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | |
| 55052 | H20GU10/CG/2.5M/120V/STD ICE | 20 | GU10 | 120 | 40 | Flood | 300 | 2 500 | 130 | 200 |
| 55051 | H35GU10/CG/2.5M/120V/STD ICE | 35 | GU10 | 120 | 40 | Flood | 600 | 2 500 | 280 | 200 |
| 55038 | H50GU10/CG/2.5M/120V/STD ICE | 50 | GU10 | 120 | 40 | Flood | 840 | 2 500 | 500 | 200 |
| 55037 | H50GU10/CG/2.5M/130V/STD ICE | 50 | GU10 | 130 | 40 | Flood | 840 | 2 500 | 375 | 200 |
| **MR16** | | | | | | | | | | |
| MOL : 1 25/32 in. (45 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | |
| 55039 | H50MR16/5M/GX5.3/12V/STD ICE | 50 | GX5.3 | 12 | N/A | Flood | N/A | 5 000 | 850 | 200 |
| **PAR20** | | | | | | | | | | |
| MOL : 3 7/32 in. (82 mm) Dia. : 2.5 in. (63.5 mm) | | | | | | | | | | |
| *50185[1] | H50PAR20/NFL/2.5M/120V/STD ICE | 50 | E26 | 120 | N/A | Narrow Flood | N/A | 2 500 | 500 | 15 |
| *50184[1] | H50PAR20/NFL/5M/130V/STD ICE | 50 | E26 | 130 | N/A | Narrow Flood | N/A | 5 000 | 375 | 15 |
| **PAR30** | | | | | | | | | | |
| MOL : 3 21/32 in. (93 mm) Dia. : 3 3/4 in. (95 mm) | | | | | | | | | | |
| *50187 | H50PAR30/FL/2.5M/120V/STD ICE | 50 | E26 | 120 | N/A | Flood | N/A | 2 500 | 600 | 15 |
| *50186[1] | H50PAR30/FL/5M/130V/STD ICE | 50 | E26 | 130 | N/A | Flood | N/A | 5 000 | 450 | 15 |
| *50191 | H75PAR30/FL/2.5M/120V/STD ICE | 75 | E26 | 120 | N/A | Flood | N/A | 2 500 | 990 | 15 |
| *50190 | H75PAR30/FL/5M/130V/STD ICE | 75 | E26 | 130 | N/A | Flood | N/A | 5 000 | 745 | 15 |
| **PAR30LN** | | | | | | | | | | |
| MOL : 4 13/16 in. (122 mm) Dia. : 3 3/4 in. (95 mm) | | | | | | | | | | |
| *50189 | H50PAR30/LN/FL/2.5M/120V/STD ICE | 50 | E26 | 120 | N/A | Flood | N/A | 2 500 | 600 | 15 |
| *50188[1] | H50PAR30/LN/FL/5M/130V/STD ICE | 50 | E26 | 130 | N/A | Flood | N/A | 5 000 | 450 | 15 |
| *50193 | H75PAR30/LN/FL/2.5M/120V/STD ICE | 75 | E26 | 120 | N/A | Flood | N/A | 2 500 | 990 | 15 |
| *50192 | H75PAR30/LN/FL/5M/130V/STD ICE | 75 | E26 | 130 | N/A | Flood | N/A | 5 000 | 745 | 15 |
| **PAR38** | | | | | | | | | | |
| MOL : 5 5/16 in. (135 mm) Dia. : 4 3/4 in. (121 mm) | | | | | | | | | | |
| *50733 | H75PAR38/FL/2.5M/MS/120V/STD ICE | 75 | E26SKT | 120 | N/A | Flood | N/A | 2 500 | 990 | 15 |
| *51053[1] | H75PAR38/FL/5M/MS/130V/STD ICE | 75 | E26SKT | 130 | N/A | Flood | N/A | 5 000 | 745 | 15 |
| *50195[1] | H90PAR38/FL/2.5M/MS/120V/STD ICE | 90 | E26SKT | 120 | N/A | Flood | N/A | 2 500 | 1 140 | 15 |
| *50194[1] | H90PAR38/FL/5M/MS/130V/STD ICE | 90 | E26SKT | 130 | N/A | Flood | N/A | 5 000 | 860 | 15 |


DIMMABLE


UV STOP

*[1]This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*
** Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.*

# ICE Lamps



**JC TYPE LAMPS** are low voltage capsules with pin bases.

JC (G4) 

JC (GY6.35) 

JC (GY9.5) 

| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|
| **JC (G4)** | MOL : 1 5/16 in. (33 mm) Dia. : 11/32 in. (9 mm) | | | | | | | |
| 51129 | H10JC/CL/2M/G4/12V/STD | 10 | G4 | 12 | Clear | 2 000 | 130 | 100 |
| 51130 | H20JC/CL/2M/G4/12V/STD | 20 | G4 | 12 | Clear | 2 000 | 300 | 100 |
| **JC (GY6.35)** | MOL : 1 23/32 in. (44 mm) Dia. : 15/32 in. (12 mm) | | | | | | | |
| 50902 | H50JC/CL/4M/GY6.35/12V/STD | 50 | GY6.35 | 12 | Clear | 4 000 | 900 | 100 |
| **JC (GY6.35)** | MOL : 2 1/4 in. (57 mm) Dia. : 15/32 in. (12 mm) | | | | | | | |
| 22121 | 200T4/CL/32V/GY9.5/STD 1945 | 200 | GY9.5 | 32 | Clear | 200 | 4 500 | 100 |


**JD TYPE LAMPS** are tubular shaped and run on line voltage. JD halogen lamps can have E26, BA15d, E11, E12, E14 and G9 bases.

T3 (BA15d) 

T3 (E11) 

| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|
| **T3 (BA15d)** | MOL : 2 7/32 in. (56 mm) Dia. : 19/32 in. (15 mm) | | | | | | | |
| 50881 | H75T3/CL/2M/BA15D/130V/STD | 75 | BA15d | 130 | Clear | 2 000 | 1 120 | 120 |
| 50950 | H100T3/CL/2M/BA15D/130V/STD | 100 | BA15d | 130 | Clear | 2 000 | 1 600 | 50 |
| 50883 | H150T3/CL/2M/BA15D/130V/STD | 150 | BA15d | 130 | Clear | 2 000 | 3 000 | 120 |
| 50885 | H250T3/CL/2M/BA15D/130V/STD | 250 | BA15d | 130 | Clear | 2 000 | 4 800 | 50 |
| **T3 (E11)** | MOL : 2 15/32 in. (63 mm) Dia. : 23/32 in. (18 mm) | | | | | | | |
| 55028 | H50T3/CL/2M/E11/130V/STD | 50 | E11 | 130 | Clear | 2 000 | 1 120 | 120 |
| 50880 | H75T3/CL/2M/E11/130V/STD | 75 | E11 | 130 | Clear | 2 000 | 1 350 | 120 |
| 50882 | H100T3/CL/2M/E11/130V/STD | 100 | E11 | 130 | Clear | 2 000 | 1 800 | 120 |
| 50951 | H150T3/CL/2M/E11/130V/STD | 150 | E11 | 130 | Clear | 2 000 | 3 000 | 120 |
| 50884 | H250T3/CL/2M/E11/130V/STD | 250 | E11 | 130 | Clear | 2 000 | 4 800 | 50 |

DIMMABLE

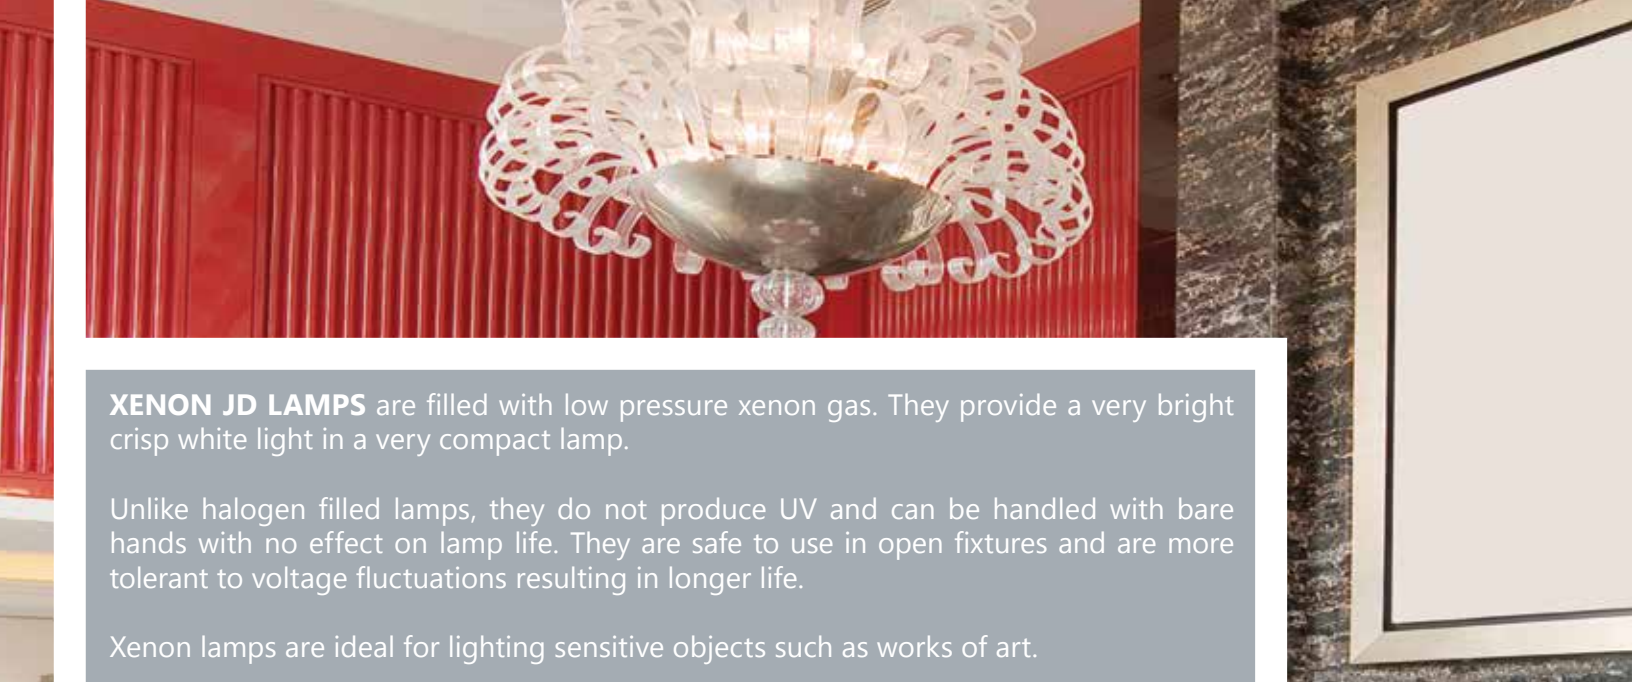

**XENON JD LAMPS** are filled with low pressure xenon gas. They provide a very bright crisp white light in a very compact lamp.

Unlike halogen filled lamps, they do not produce UV and can be handled with bare hands with no effect on lamp life. They are safe to use in open fixtures and are more tolerant to voltage fluctuations resulting in longer life.


Xenon lamps are ideal for lighting sensitive objects such as works of art.




| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|
| **T3 (E26)** | MOL : 2 3/4 in. (70 mm) Dia. : 1 1/32 in. (26 mm) | | | | | | | |
| 15457 | X40T3/F/3M/KX/120V | 40 | E26 | 120 | Frost | 3 000 | 560 | 50 |
| **T3 (BA15d)** | MOL : 2 15/32 in. (63 mm) Dia. : 23/32 in. (18 mm) | | | | | | | |
| 15439 | X20T3/3M/KX/BA15D/120V | 20 | BA15d | 120 | Clear | 3 000 | 200 | 50 |
| 60952 | X40T3/2M/BA15D/120V/STD | 40 | BA15d | 120 | Clear | 2 000 | 560 | 120 |
| 60956 | X60T3/2M/BA15D/120V/STD | 60 | BA15d | 120 | Clear | 2 000 | 960 | 120 |
| **T3 (E11)** | MOL : 2 1/4 in. (57 mm) Dia. : 23/32 in. (18 mm) | | | | | | | |
| 15440 | X20T3/3M/KX/E11/120V | 20 | E11 | 120 | Clear | 3 000 | 200 | 50 |
| 60950 | X40T3/2M/E11/120V/STD | 40 | E11 | 120 | Clear | 2 000 | 560 | 120 |
| 60954 | X60T3/2M/E11/120V/STD | 60 | E11 | 120 | Clear | 2 000 | 960 | 120 |
| **T3 (E12)** | MOL : 2 5/16 in. (59 mm) Dia. : 23/32 in. (18 mm) | | | | | | | |
| 60948 | X20T3/2M/E12/120V/STD | 20 | E12 | 120 | Clear | 2 000 | 200 | 120 |
| 60951 | X40T3/2M/E12/120V/STD | 40 | E12 | 120 | Clear | 2 000 | 560 | 120 |
| 60955 | X60T3/2M/E12/120V/STD | 60 | E12 | 120 | Clear | 2 000 | 960 | 120 |
| **T3 (E12)** | MOL : 1 25/32 in. (45 mm) Dia. : 23/32 in. (18 mm) | | | | | | | |
| 60949 | X20T3/F/2M/E12/120V/STD | 20 | E12 | 120 | Frost | 2 000 | 200 | 120 |
| 60953 | X40T3/F/2M/E12/120V/STD | 40 | E12 | 120 | Frost | 2 000 | 560 | 120 |
| 60957 | X60T3/F/2M/E12/120V/STD | 60 | E12 | 120 | Frost | 2 000 | 960 | 120 |




# Xenon JD Lamps

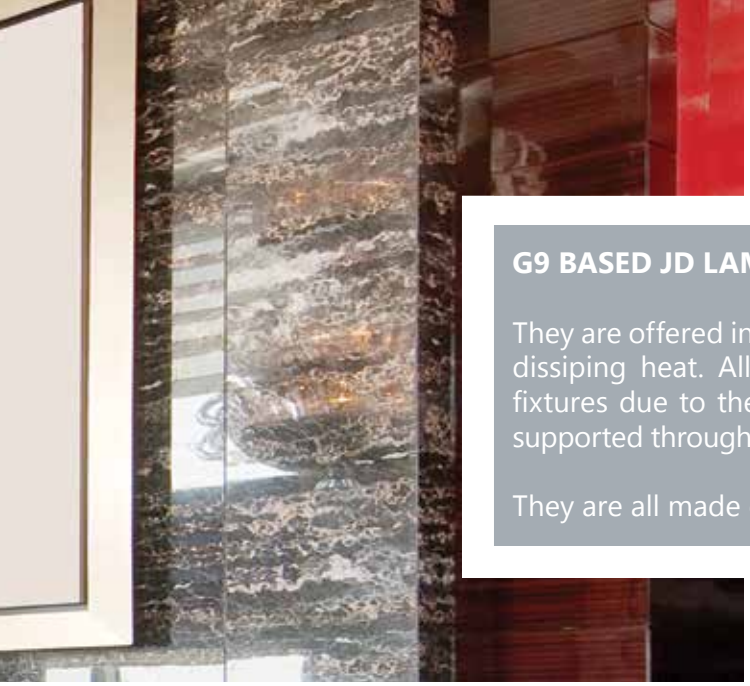


**G9 BASED JD LAMPS** are commonly refered to as G9 lamps.

They are offered in regular glass base and in ceramic base; ceramic is known for dissiping heat. All STANDARD G9 based JD lamps are safe to use in open fixtures due to their patented integral safety fuses. The lamp filament is well supported through glass pinch technology which minimizes deformation as well.

They are all made of UV stop quartz.

JD (G9) Glass Base



JD (G9) Ceramic Base



| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|
| **JD (G9) - Glass Base** | | | | | | | | |
| MOL : 1 21/32 in. (42 mm) | Dia. : 15/32 in. (12 mm) | | | | | | | |
| 58260 | H25JD/42mm/CL/2M/G9/130V/STD | 25 | G9 | 130 | Clear | 2000 | 255 | 100 |
| 58257 | H35JD/42mm/F/2M/G9/130V/STD | 35 | G9 | 130 | Frost | 2000 | 380 | 100 |
| 57259 | H40JD/42MM/CL/2M/G9/130V/STD | 40 | G9 | 130 | Clear | 2000 | 480 | 100 |
| 57256 | H40JD/42MM/F/2M/G9/130V/STD | 40 | G9 | 130 | Frost | 2000 | 480 | 100 |
| 57255 | H50JD/42MM/CL/2M/G9/130V/STD | 50 | G9 | 130 | Clear | 2000 | 600 | 100 |
| 57261 | H50JD/42MM/F/2M/G9/130V/STD | 50 | G9 | 130 | Frost | 2000 | 600 | 100 |
| 57258 | H60JD/42MM/CL/2M/G9/130V/STD | 60 | G9 | 130 | Clear | 2000 | 800 | 100 |
| 57260 | H60JD/42MM/F/2M/G9/130V/STD | 60 | G9 | 130 | Frost | 2000 | 800 | 100 |
| 58258 | H75JD/42mm/CL/2M/G9/130V/STD | 75 | G9 | 130 | Clear | 2000 | 1050 | 100 |
| **JD (G9) - Ceramic Base** | | | | | | | | |
| MOL : 2 7/32 in. (56 mm) | Dia. : 15/32 in. (12 mm) | | | | | | | |
| 55057 | H25JD/56MM/CL/2M/G9/120V/STD | 25 | G9 | 120 | Clear | 2000 | 255 | 100 |
| 55058 | H40JD/56MM/CL/2M/G9/120V/STD | 40 | G9 | 120 | Clear | 2000 | 480 | 100 |
| 57253 | H40JD/56MM/F/2M/G9/120V/STD | 40 | G9 | 120 | Frost | 2000 | 480 | 100 |
| 11247 | H50JD/56MM/CL/2M/G9/120V/STD | 50 | G9 | 120 | Clear | 2000 | 600 | 100 |
| 15646 | H50JD/56MM/F/2M/G9/120V/STD | 50 | G9 | 120 | Frost | 2000 | 600 | 100 |
| 55059 | H60JD/56MM/CL/2M/G9/120V/STD | 60 | G9 | 120 | Clear | 2000 | 800 | 100 |
| 57257 | H60JD/56MM/F/2M/G9/120V/STD | 60 | G9 | 120 | Frost | 2000 | 800 | 100 |
| 55060 | H75JD/56MM/CL/2M/G9/120V/STD | 75 | G9 | 120 | Clear | 2000 | 1050 | 100 |







# JD Lamps



**JCD TYPE LAMPS** are line voltage (120-130 volt) halogen capsules with pin bases.

All STANDARD JCD lamps are safe to use in open fixtures due to their patented integral safety fuses.

The filament is well supported through glass pinch technology which minimizes deformation as well. They are all made of UV stop quartz.

JCD (GY6.35) 

JCD (G8) 


JCD (GY8) 

| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|
| **JCD (GY6.35)** | | | | | | | | |
| MOL : 1 13/16 in. (46 mm) | Dia. : 1/2 in. (13 mm) | | | | | | | |
| 51045 | H20JCD/CL/2M/GY6.35/120V/STD | 20 | GY6.35 | 120 | Clear | 2 000 | 180 | 120 |
| 50879 | H35JCD/CL/2M/GY6.35/120V/STD | 35 | GY6.35 | 120 | Clear | 2 000 | 380 | 120 |
| 50878 | H50JCD/CL/2M/GY6.35/120V/STD | 50 | GY6.35 | 120 | Clear | 2 000 | 600 | 120 |
| 10317 | H75JCD/CL/2M/GY6.35/120V/STD | 75 | GY6.35 | 120 | Clear | 2 000 | 1 050 | 100 |
| 50877 | H100JCD/CL/2M/GY6.35/120V/STD | 100 | GY6.35 | 120 | Clear | 2 000 | 1 500 | 100 |
| **JCD (G8)** | | | | | | | | |
| MOL : 1 13/16 in. (46 mm) | Dia. : 1/2 in. (13 mm) | | | | | | | |
| 55055 | H20JCD/CL/2M/G8/120V/STD | 20 | G8 | 120 | Clear | 2 000 | 200 | 100 |
| 10253 | H35JCD/CL/2M/G8/120V/STD | 35 | G8 | 120 | Clear | 2 000 | 380 | 120 |
| 10368 | H50JCD/CL/2M/G8/120V/STD | 50 | G8 | 120 | Clear | 2 000 | 600 | 120 |
| 15710 | JCD100W/130V/G8 | 100 | G8 | 130 | Clear | 2 000 | 1 600 | 100 |
| **JCD (GY8)** | | | | | | | | |
| MOL : 1 7/8 in. (47.5 mm) | Dia. : 1/2 in. (13 mm) | | | | | | | |
| 11266 | H25JCD/CL/2M/GY8/120V | 25 | GY8 | 120 | Clear | 2 000 | 420 | 50 |
| 11267 | H75JCD/CL/2M/GY8/120V | 75 | GY8 | 120 | Clear | 2 000 | 1 300 | 50 |
| 11265 | H100JCD/CL/2M/GY8/120V | 100 | GY8 | 120 | Clear | 2 000 | 1 900 | 50 |


DIMMABLE


UV STOP

# JCD Lamps

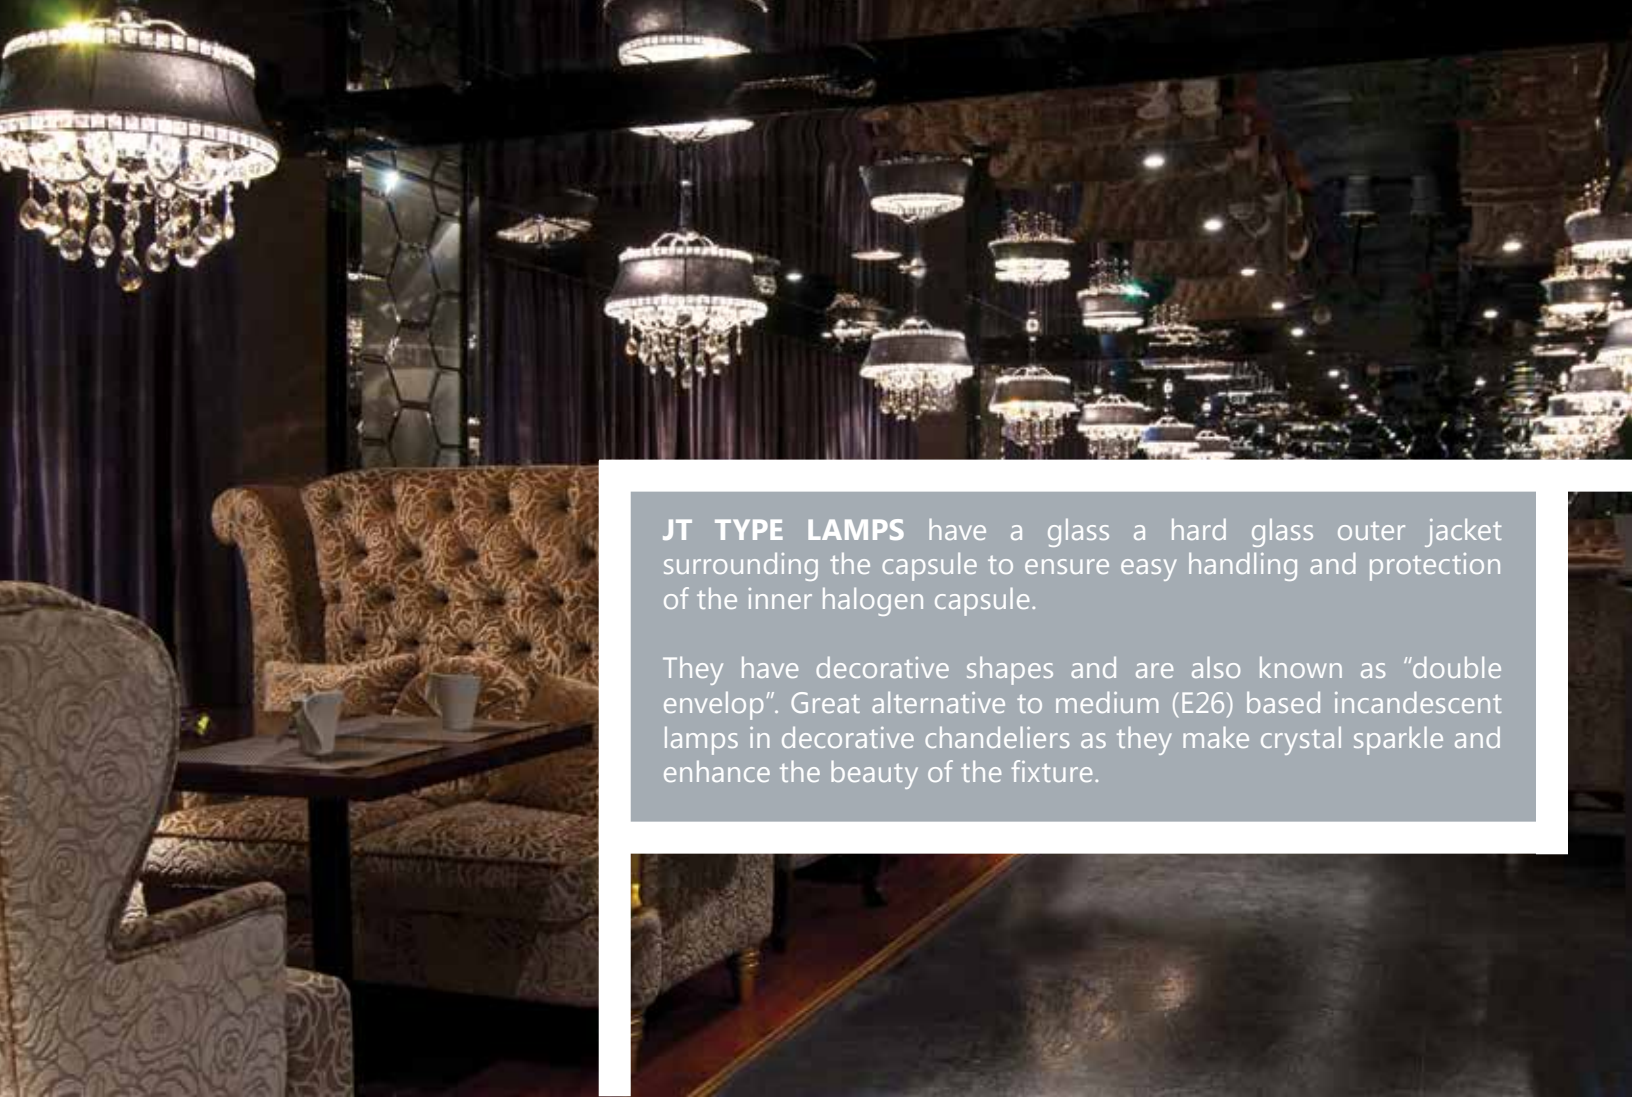

**JT TYPE LAMPS** have a glass a hard glass outer jacket surrounding the capsule to ensure easy handling and protection of the inner halogen capsule.

They have decorative shapes and are also known as "double envelop". Great alternative to medium (E26) based incandescent lamps in decorative chandeliers as they make crystal sparkle and enhance the beauty of the fixture.



BT15



F10 (E12)



F11 (E26)



T10



| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Average life (hrs) | Initial lumens (lm) | Operating burn position | Case qty |
|---|---|---|---|---|---|---|---|---|---|
| **BT15** | | | | | | | | | |
| MOL : 4 1/4 in. (108 mm) | Dia. : 1 7/8 in. (48 mm) | | | | | | | | |
| 10219*[1] | H60BT15/WH/2M/120V/STD | 60 | E26 | 120 | White | 2 000 | 950 | BU/BD | 15 |
| **F10** | | | | | | | | | |
| MOL : 3 11/16 in. (94 mm) | Dia. : 1 1/4 in. (32 mm) | | | | | | | | |
| 10216* | H40F10/CL/2M/E12/120V/STD | 40 | E12 | 120 | Clear | 2 000 | 520 | BU/BD | 15 |
| 10220* | H60F10/CL/2M/E12/120V/STD | 60 | E12 | 120 | Clear | 2 000 | 1 000 | BU/BD | 15 |
| **T10** | | | | | | | | | |
| MOL : 3 17/32 in. (90 mm) | Dia. : 1 1/4 in. (32 mm) | | | | | | | | |
| 50886[1] | H75T10/CL/2M/120V/STD | 75 | E26 | 120 | Clear | 2 000 | 920 | BU/BD | 250 |

[1]*This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*







# JT Lamps



MR11 (G4) 

MR16 (GX5.3) 

MR16 (E26) 

MR16 (GU10) 

| Order code | Description | ANSI code | Watts (W) | Base | Volts (V) | Colour temp. (K) | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **MR11 - Cover Glass** | | | | | | | | | | | | |
| MOL : 1 3/8 in. (35 mm) Dia. : 1 3/8 in. (35 mm) | | | | | | | | | | | | |
| 55094 | H10MR11/NSP/CG/2M/G4/6V/STD | N/A | 10 | G4 | 6 | 2 900 | 10 | Narrow Spot | 700 | 2 000 | 80 | 100 |
| 55054 | H5MR11/NSP/CG/2M/G4/12V/STD | N/A | 5 | G4 | 12 | 2 900 | 10 | Narrow Spot | 700 | 2 000 | 45 | 120 |
| 50900 | H20MR11/NFL/CG/2M/G4/12V/FTC STD | FTC/CG | 20 | G4 | 12 | 2 900 | 17 | Narrow Flood | 1 600 | 2 000 | 200 | 200 |
| 51050 | H20MR11/MFL/CG/2M/G4/12V/FTD STD | FTD/CG | 20 | G4 | 12 | 2 900 | 27 | Flood | 600 | 2 000 | 200 | 120 |
| 50901 | H35MR11/NFL/CG/2M/G4/12V/FTF STD | FTF/CG | 35 | G4 | 12 | 2 900 | 18 | Narrow Flood | 3 000 | 2 000 | 345 | 200 |
| 50899 | H35MR11/MFL/CG/2M/G4/12V/FTH STD | FTH/CG | 35 | G4 | 12 | 2 900 | 28 | Flood | 1 300 | 2 000 | 345 | 120 |
| **MR11 - Open** | | | | | | | | | | | | |
| MOL : 1 3/8 in. (35 mm) Dia. : 1 3/8 in. (35 mm) | | | | | | | | | | | | |
| 50894 | H20MR11/NSP/AX/G4/12V/FTB STD | FTB | 20 | G4 | 12 | 2 900 | 11 | Narrow Spot | 5 000 | 2 000 | 200 | 200 |
| 50895 | H20MR11/NFL/AX/G4/12V/FTC STD | FTC | 20 | G4 | 12 | 2 900 | 19 | Narrow Flood | 1 600 | 2 000 | 200 | 120 |
| 51054 | H20MR11/MFL/AX/G4/12V/FTD STD | FTD | 20 | G4 | 12 | 2 900 | 29 | Flood | 600 | 2 000 | 200 | 120 |
| 50897 | H35MR11/NFL/AX/G4/12V/FTF STD | FTF | 35 | G4 | 12 | 2 900 | 19 | Narrow Flood | 3 000 | 2 000 | 345 | 200 |
| 50898 | H35MR11/MFL/AX/G4/12V/FTH STD | FTH | 35 | G4 | 12 | 2 900 | 30 | Flood | 1 300 | 2 000 | 345 | 120 |
| **MR16 - Cover Glass** | | | | | | | | | | | | |
| MOL : 1 25/32 in. (45 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | | |
| 51134 | H20MR16/FL/CG/4M/GX5.3/12V/BAB STD | BAB/CG | 20 | GX5.3 | 12 | 2 950 | 38 | Flood | 500 | 4 000 | 260 | 100 |
| 50892 | H35MR16/FL/CG/4M/GX5.3/12V/FMW STD | FMW/CG | 35 | GX5.3 | 12 | 3 000 | 38 | Flood | 1 000 | 4 000 | 530 | 100 |
| 50893 | H50MR16/FL/CG/4M/GX5.3/12V/EXN STD | EXN/CG | 50 | GX5.3 | 12 | 3 050 | 38 | Flood | 1 600 | 4 000 | 850 | 100 |
| **MR16 - Cover Glass - Line Voltage** | | | | | | | | | | | | |
| MOL : 2 5/32 in. (55 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | | |
| 55570* | H35MR16/FL/CG/2M/E26/120V/STD | N/A | 35 | E26 | 120 | 2 800 | 38 | Flood | 800 | 2 000 | 240 | 100 |
| 57312* | H50MR16/FL/CG/2M/E27/120V/STD | N/A | 50 | E27 | 120 | 2 800 | 30 | Flood | 1 100 | 2 000 | 420 | 200 |
| 55569* | H50MR16/FL/CG/2M/E26/120V/STD | N/A | 50 | E26 | 120 | 2 800 | 38 | Flood | 1 100 | 2 000 | 420 | 100 |
| 59590* | H35MR16/FL/CG/E26/130V/STD | N/A | 35 | E26 | 130 | 2 800 | 38 | Flood | 800 | 2 500 | 180 | 100 |
| 59589* | H50MR16/FL/CG/E26/130V/STD | N/A | 50 | E26 | 130 | 2 800 | 38 | Flood | 1 100 | 2 500 | 315 | 100 |
| **MR16 (GU10)** | | | | | | | | | | | | |
| MOL : 2 5/32 in. (55 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | | |
| 55034 | H20GU10/NFL/CG/2.5M/120V/STD | | 20 | GU10 | 120 | 2 800 | 25 | Narrow Flood | 500 | 2 500 | 120 | 100 |
| 55033 | H35GU10/NFL/CG/2.5M/120V/STD | | 35 | GU10 | 120 | 2 800 | 25 | Narrow Flood | 1 000 | 2 500 | 280 | 100 |
| 10437 | H50GU10/NFL/CG/2.5M/120V/STD | | 50 | GU10 | 120 | 2 800 | 25 | Narrow Flood | 1 400 | 2 500 | 500 | 100 |
| 55035 | H50GU10/NFL/2M/CG/120V/ HS | | 50 | GU10 | 120 | 2 800 | 25 | Narrow Flood | 1 400 | 2 000 | N/A | 15 |
| 10438 | H50GU10/NFL/CG/3M/130V/STD | | 50 | GU10 | 130 | 2 800 | 25 | Narrow Flood | 1 400 | 3 000 | 375 | 100 |
| **MR16 - Open** | | | | | | | | | | | | |
| MOL : 1 25/32 in. (45 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | | |
| 51066 | H20MR16/FL/4M/GX5.3/12V/BAB STD | BAB | 20 | GX5.3 | 12 | 2 950 | 36 | Flood | 500 | 4 000 | 260 | 100 |
| 50888 | H35MR16/FL/4M/GX5.3/12V/FMW STD | FMW | 35 | GX5.3 | 12 | 3 000 | 38 | Flood | 1 000 | 4 000 | 530 | 200 |
| 50889 | H50MR16/NSP/4M/GX5.3/12V/EXT STD | EXT | 50 | GX5.3 | 12 | 3 050 | 13 | Narrow Spot | 9 800 | 4 000 | 850 | 100 |
| 50890 | H50MR16/NFL/4M/GX5.3/12V/EXZ STD | EXZ | 50 | GX5.3 | 12 | 3 050 | 24 | Narrow Flood | 3 200 | 4 000 | 850 | 100 |
| 50891 | H50MR16/FL/4M/GX5.3/12V/EXN STD | EXN | 50 | GX5.3 | 12 | 3 050 | 38 | Flood | 1 600 | 4 000 | 850 | 100 |


DIMMABLE


UV STOP *

# MR11 & MR16 Lamps



**ACCUBEAM™ LAMPS** use an innovative reflector design that forms the light beam before it reaches the lens. The innovative corrugated reflector allows for greater light concentration at the centre of the beam giving a light output that is comparable to conventional halogen using less wattage.

ACCUBEAM was designed to deliver a smooth, precise beam pattern and allows for even light distribution; without hot spots or striations.










| Order code | Description | Watts (W) | Base | Volts (V) | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|
| **PAR20** | | | | | | | | | | |
| MOL : 3 9/32 in. (83 mm) Dia. : 2.5 in. (63.5 mm) | | | | | | | | | | |
| *50001[1] | H50PAR20/NFL/5M/130V/STD ACC | 50 | E26 | 130 | 30 | Narrow Flood | 1 500 | 5 000 | 450 | 15 |
| **PAR30** | | | | | | | | | | |
| MOL : 3 5/8 in. (92 mm) Dia. : 3 3/4 in. (95 mm) | | | | | | | | | | |
| *50008 | H50PAR30/NFL/2.5M/120V/STD ACC | 50 | E26 | 120 | 30 | Narrow Flood | 1 850 | 2 500 | 600 | 15 |
| *50009[1] | H50PAR30/NSP/5M/130V/STD ACC | 50 | E26 | 130 | 10 | Narrow Spot | 6 000 | 5 000 | 450 | 15 |
| *50007[1] | H50PAR30/NFL/5M/130V/STD ACC | 50 | E26 | 130 | 30 | Narrow Flood | 1 850 | 5 000 | 450 | 15 |
| *50014 | H75PAR30/NFL/2.5M/120V/STD ACC | 75 | E26 | 120 | 30 | Narrow Flood | 3 200 | 2 500 | 1 100 | 15 |
| *50015[1] | H75PAR30/NSP/5M/130V/STD ACC | 75 | E26 | 130 | 10 | Narrow Spot | 9 000 | 5 000 | 825 | 15 |
| *50013[1] | H75PAR30/NFL/5M/130V/STD ACC | 75 | E26 | 130 | 30 | Narrow Flood | 3 200 | 5 000 | 825 | 15 |
| *50011[1] | H75PAR30/FL/5M/130V/STD ACC | 75 | E26 | 130 | 40 | Flood | 1 600 | 5 000 | 825 | 15 |
| **PAR38** | | | | | | | | | | |
| MOL : 5 5/16 in. (135 mm) Dia. : 4 3/4 in. (121 mm) | | | | | | | | | | |
| *50066 | H45PAR38/SP/5M/130V/STD ACC | 45 | E26SKT | 130 | 10 | Spot | 7 000 | 5 000 | 390 | 15 |
| *50041[1] | H45PAR38/FL/5M/130V/STD ACC | 45 | E26SKT | 130 | 30 | Flood | 1 700 | 5 000 | 390 | 15 |
| *50101[1] | H75PAR38/FL/5M/130V/STD ACC | 75 | E26SKT | 130 | 30 | Flood | 3 300 | 5 000 | 825 | 15 |

*[1]This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*
** Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.*

DIMMABLE

# ACCUBEAM™ Lamps



**J TYPE LAMPS** are double ended. STANDARD carries a vast selection of J lamps in T3 shape made of fine quality quartz glass.



T3 - 79 mm



T3 - 119 mm



T3 - 256 mm


| Order code | Description | ANSI code | Watts (W) | Base | Volts (V) | Colour/ Finish | Average life (hrs) | Initial lumens (lm) | MOL (in.) | MOL (mm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **T3 - 79 mm** | | | | | | | | | | | |
| 55043 | H60T3/79mm/CL/2M/R7S/130V/STD | N/A | 60 | R7s | 130 | Clear | 2 000 | 880 | 12 | 79 | 12 |
| 57225 | H75T3/79mm/2M/R7S/120V/STD | N/A | 75 | R7s | 120 | Clear | 2 000 | 750 | 12 | 79 | 12 |
| 51042 | H75T3/79mm/R7S/130V/STD | N/A | 75 | R7s | 130 | Clear | 2 000 | 792 | 3 1/8 | 79 | 12 |
| 55047 | H75T3/79mm/CL/2M/R7S/130V/JPN/STD | N/A | 75 | R7s | 130 | Clear | 2 000 | 1 150 | 3 1/8 | 79 | 12 |
| 57361 | H100T3/79MM/2M/R7S/120V/STD | N/A | 100 | R7s | 120 | Clear | 2 000 | 1 300 | 3 1/8 | 79 | 50 |
| 51043 | H100T3/79mm/2M/R7S/130V/STD | N/A | 100 | R7s | 130 | Clear | 2 000 | 1 300 | 3 1/8 | 79 | 12 |
| 57224 | H150T3/79mm/2M/R7S/120V/STD | N/A | 150 | R7s | 120 | Clear | 2 000 | 2 400 | 3 1/8 | 79 | 50 |
| 51075 | H150T3/79mm/2M/R7S/130V/STD | N/A | 150 | R7s | 130 | Clear | 2 000 | 2 400 | 3 1/8 | 79 | 50 |
| 51120 | H200T3/79mm/2M/R7S/130V/STD | N/A | 200 | R7s | 130 | Clear | 2 000 | 3 400 | 3 1/8 | 79 | 50 |
| **T3 - 119 mm** | | | | | | | | | | | |
| 51086 | H100T3/119mm/2M/R7S/130V/STD | N/A | 100 | R7s | 130 | Clear | 2 000 | 1 300 | 4 11/16 | 119 | 50 |
| 50903 | H150T3/119mm/2M/R7S/130V/STD | N/A | 150 | R7s | 130 | Clear | 2 000 | 1 800 | 4 11/16 | 119 | 12 |
| 51044 | H200T3/119mm/2M/R7S/130V/STD | N/A | 200 | R7s | 130 | Clear | 2 000 | 3 400 | 4 11/16 | 119 | 50 |
| 51078 | H300T3/119mm/CL/2M/R7S/120V/STD | EHM | 300 | R7s | 120 | Clear | 2 000 | 5 950 | 4 11/16 | 119 | 12 |
| 15533 | H300T3/2M/PB/130V | N/A | 300 | Pin Blade | 130 | Clear | 2 000 | 5 400 | 4 11/16 | 119 | 50 |
| 51041 | H300T3/119mm/CL/2M/R7S/130V/STD | FCL | 300 | R7s | 130 | Clear | 2 000 | 5 950 | 4 11/16 | 119 | 12 |
| 51076 | H500T3/119mm/CL/2M/R7S/120V/STD | DVS | 500 | R7s | 120 | Clear | 2 000 | 10 500 | 4 11/16 | 119 | 12 |
| 51077 | H500T3/119mm/CL/2M/R7S/130V/STD | N/A | 500 | R7s | 130 | Clear | 2 000 | 10 500 | 4 11/16 | 119 | 12 |
| **T3 - 190 mm** | | | | | | | | | | | |
| 51046 | H1000T3/190mm/CL/2M/R7S/130V/STD | S.O. | 1 000 | R7s | 130 | Claire | 2 000 | 21 000 | 4 11/16 | 119 | 50 |
| **T3 - High Voltage** | | | | | | | | | | | |
| 59261 | H300QT3/119mm/CL/2M/220V/STD | N/A | 300 | R7s | 220 | Clear | 2 000 | 33 000 | 4 11/16 | 119 | 50 |
| 51047 | H1000T3/190mm/CL/2M/R7S/240V/STD | DYD | 1 000 | R7s | 240 | Clear | 2 000 | 21 000 | 7 15/32 | 190 | 12 |
| 51085 | H1000T3/256mm/CL/2M/R7S/240V/STD | N/A | 1 000 | R7s | 240 | Clear | 2 000 | 21 000 | 10 3/32 | 256 | 50 |
| 59262 | H1500QT3/256mm/CL/2M/R7S/208V/STD | N/A | 1 500 | R7s | 208 | Clear | 2 000 | 33 000 | 10 3/32 | 256 | 50 |
| 51049 | H1500T3/256mm/CL/2M/R7S/240V/STD | N/A | 1 500 | R7s | 240 | Clear | 2 000 | 26 400 | 10 3/32 | 256 | 50 |
| 59260 | H1500QT3/256mm/CL/2M/277V/STD | N/A | 1 500 | R7s | 277 | Clear | 2 000 | 33 000 | 10 3/32 | 256 | 50 |
| **T3 - Low Voltage** | | | | | | | | | | | |
| 55088 | H150T3/79mm/2M/R7S/12V/STD | N/A | 150 | R7s | 12 | Clear | 2 000 | 2 900 | 3 1/8 | 79 | 10 |
| 10154 | H150T3/119mm/CL/2M/R7S/12V/STD | N/A | 150 | R7s | 12 | Clear | 2 000 | 2 250 | 4 11/16 | 119 | 10 |
| 10318 | H300T3/119mm/CL/2M/R7S/24V/STD | N/A | 300 | R7s | 24 | Clear | 2 000 | 5 400 | 4 11/16 | 119 | 10 |
| 10319 | H300T3/119mm/CL/2M/R7S/32V/STD | EHM | 300 | R7s | 32 | Clear | 2 000 | 5 400 | 4 11/16 | 119 | 10 |
| **T3 - Infrared** | | | | | | | | | | | |
| 55077 | H375T3/221mm/CL/IR/5M/R7S/120V/STD | N/A | 375 | R7s | 120 | Clear | 5 000 | N/A | 8 11/16 | 221 | 42 |
| 55070 | H500T3/221MM/CL/IR/5M/R7S/120V/STD | N/A | 500 | R7s | 120 | Clear | 5 000 | N/A | 8 11/16 | 221 | 42 |
| 55071 | H500T3/224mm/CL/IR/5M/ML/120V/STD | N/A | 500 | Metal Leads | 120 | Clear | 5 000 | N/A | 8 13/16 | 224 | 42 |
| 55073 | H1000T3/303mm/CL/IR/5M/ML/240V/STD | N/A | 1 000 | Metal Leads | 240 | Clear | 5 000 | N/A | 11 15/16 | 303 | 42 |
| 55072 | H1000T3/351MM/CL/IR/5M/ML/240V/STD | N/A | 1 000 | Metal Leads | 240 | Clear | 5 000 | N/A | 13 13/16 | 351 | 42 |
| 55074 | H1600T3/503MM/CL/IR/5M/ML/240V/STD | N/A | 1 600 | Metal Leads | 240 | Clear | 5 000 | N/A | 19 13/16 | 503 | 42 |
| 55075 | H2500T3/732mm/CL/IR/5M/ML/480V/STD | N/A | 2 500 | Metal Leads | 480 | Clear | 5 000 | N/A | 28 13/16 | 732 | 42 |
| 55076 | H3800T3/1062MM/CL/IR/5M/ML/570V/STD | N/A | 3 800 | Metal Leads | 570 | Clear | 5 000 | N/A | 41 13/16 | 1 062 | 36 |



DIMMABLE

# J Type Double Ended Lamps










| Order code | Description | Watts (W) | Base | Volts (V) | Colour/ Finish | Beam angle (°) | Beam spread | Average life (hrs) | Case qty |
|---|---|---|---|---|---|---|---|---|---|
| **PAR20** | | | | | | | | | |
| MOL : 3 9/32 in. (83 mm) | Dia. : 2.5 in. (63.5 mm) | | | | | | | | |
| 55001* | H35PAR20/NFL/Y/2M/130V/STD | 35 | E26 | 130 | Yellow | 30 | Narrow Flood | 2 000 | 120 |
| 55002* | H35PAR20/NFL/G/2M/130V/STD | 35 | E26 | 130 | Green | 30 | Narrow Flood | 2 000 | 120 |
| 55004* | H35PAR20/NFL/B/2M/130V/STD | 35 | E26 | 130 | Blue | 30 | Narrow Flood | 2 000 | 120 |
| **PAR30** | | | | | | | | | |
| MOL : 3 21/32 in. (93 mm) | Dia. : 3 3/4 in. (95 mm) | | | | | | | | |
| 55005* | H50PAR30/FL/B/2M/130V/STD | 50 | E26 | 130 | Blue | 30 | Flood | 2 000 | 90 |
| 55006* | H50PAR30/FL/R/2M/130V/STD | 50 | E26 | 130 | Red | 30 | Flood | 2 000 | 90 |
| 55007* | H50PAR30/FL/G/2M/130V/STD | 50 | E26 | 130 | Green | 30 | Flood | 2 000 | 90 |
| 55008* | H50PAR30/FL/Y/2M/130V/STD | 50 | E26 | 130 | Yellow | 30 | Flood | 2 000 | 90 |
| **PAR38** | | | | | | | | | |
| MOL : 5 5/16 in. (135 mm) | Dia. : 4 3/4 in. (121 mm) | | | | | | | | |
| 51181* | H90PAR38/FL/B/2M/MS/130V/STD | 90 | E26SKT | 130 | Blue | 30 | Flood | 2 000 | 15 |
| 51182* | H90PAR38/FL/G/2M/MS/130V/STD | 90 | E26SKT | 130 | Green | 30 | Flood | 2 000 | 15 |
| 51183* | H90PAR38/FL/R/2M/MS/130V/STD | 90 | E26SKT | 130 | Red | 30 | Flood | 2 000 | 15 |
| 51184* | H90PAR38/FL/Y/2M/MS/130V/STD | 90 | E26SKT | 130 | Yellow | 30 | Flood | 2 000 | 15 |
| **MR16** | | | | | | | | | |
| MOL : 1 25/32 in. (45 mm) | Dia. : 2 in. (51 mm) | | | | | | | | |
| 55063 | H50MR16/FL/BLUE/CG/4M/GX5.3/12V/STD | 50 | GX5.3 | 12 | Blue | 38 | Flood | 4 000 | 200 |
| 55064 | H50MR16/FL/G/CG/4M/GX5.3/12V/STD | 50 | GX5.3 | 12 | Green | 38 | Flood | 4 000 | 200 |
| 55066 | H50MR16/FL/R/CG/4M/GX5.3/12V/STD | 50 | GX5.3 | 12 | Red | 38 | Flood | 4 000 | 200 |
| 55067 | H50MR16/FL/Y/CG/4M/GX5.3/12V/STD | 50 | GX5.3 | 12 | Yellow | 38 | Flood | 4 000 | 200 |

**COOL BEAM REFLECTOR LAMPS** have a dichroic coating that allows for the heat to be released through the back of the lamp; resulting in lower temperature in front of the lamp.

Cool Beam lamps are ideal for restaurants and other heat sensitive environments.







| Order code | Description | Watts (W) | Base | Volts (V) | Colour temp. (K) | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR30** | | | | | | | | | | | |
| MOL : 3 21/32 in. (93 mm) | Dia. : 3 3/4 in. (95 mm) | | | | | | | | | | |
| 10145[1] [2] | H75PAR30/CLB/5M/130V/STD | 75 | E26 | 130 | 2 800 | 40 | Flood | 1 700 | 5 000 | 1 100 | 15 |
| **PAR38** | | | | | | | | | | | |
| MOL : 5 5/16 in. (135 mm) | Dia. : 4 3/4 in. (121 mm) | | | | | | | | | | |
| 10146[1] [2] | H60PAR38/CLB/5M/MS/130V/STD | 60 | E26SKT | 130 | 2 900 | 36 | Flood | 1 700 | 5 000 | 800 | 15 |
| 51180[1] [2] | H90PAR38/CLB/5M/MS/130V/STD | 90 | E26SKT | 130 | 2 900 | 36 | Flood | 3 000 | 5 000 | 1 140 | 15 |

*[1]This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*
*[2] Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.*


DIMMABLE


UV STOP

# Coloured & Cool Beam Lamps



**STANDARD** offers a full line of premium quality, professional grade reflector halogen lamps.

PAR16 
PAR20 
PAR30 
PAR30LN 
PAR36 
PAR38 

| Order code | Description | Watts (W) | Base | Volts (V) | Colour temp. (K) | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR16** | | | | | | | | | | | |
| MOL : 3 7/32 in. (82 mm) Dia. : 2 in. (51 mm) | | | | | | | | | | | |
| 50974 | H40PAR16/NFL/2.5M/130V/STD | 40 | E26 | 130 | 2 800 | 30 | Narrow Flood | 530 | 2 500 | 400 | 120 |
| 50975 | H60PAR16/NFL/2.5M/130V/STD | 60 | E26 | 130 | 2 800 | 30 | Narrow Flood | 1 100 | 2 500 | 650 | 120 |
| **PAR20** | | | | | | | | | | | |
| MOL : 3 7/32 in. (82 mm) Dia. : 2.5 in. (63.5 mm) | | | | | | | | | | | |
| 51084 | H35PAR20/NFL/2.5M/120V/STD | 35 | E26 | 120 | 2 800 | 30 | Narrow Flood | 630 | 2 500 | 315 | 15 |
| 51083 | H35PAR20/NFL/5M/130V/STD | 35 | E26 | 130 | 2 800 | 28 | Narrow Flood | 630 | 5 000 | 235 | 15 |
| *50738 | H50PAR20/NFL/2.5M/120V/STD | 50 | E26 | 120 | 2 800 | 28 | Narrow Flood | 1 050 | 2 500 | 550 | 15 |
| *51146 | H50PAR20/NFL/5M/130V/STD | 50 | E26 | 130 | 2 800 | 28 | Narrow Flood | 1 050 | 5 000 | 410 | 15 |
| **PAR30** | | | | | | | | | | | |
| MOL : 3 21/32 in. (93 mm) Dia. : 3 3/4 in. (95 mm) | | | | | | | | | | | |
| *10382 | H50PAR30/NSP/5M/130V/STD | 50 | E26 | 130 | 2 800 | 13 | Narrow Spot | 5 000 | 5 000 | 495 | 15 |
| *10383 | H50PAR30/NFL/5M/130V/STD | 50 | E26 | 130 | 2 800 | 30 | Narrow Flood | 2 000 | 5 000 | 495 | 15 |
| *10381 | H50PAR30/FL/2.5M/120V/STD | 50 | E26 | 120 | 2 800 | 40 | Flood | 1 350 | 2 500 | 660 | 15 |
| *50739 | H50PAR30/FL/5M/130V/STD | 50 | E26 | 130 | 2 800 | 40 | Flood | 1 350 | 5 000 | 495 | 15 |
| *50016 | H75PAR30/NSP/2.5M/120V/STD | 75 | E26 | 120 | 2 800 | 10 | Narrow Spot | 8 000 | 2 500 | 1 100 | 90 |
| *10387[1] | H75PAR30/NSP/5M/130V/STD | 75 | E26 | 130 | 2 800 | 13 | Narrow Spot | 8 000 | 5 000 | 825 | 15 |
| *10385 | H75PAR30/FL/2.5M/120V/STD | 75 | E26 | 120 | 2 800 | 40 | Flood | 2 000 | 2 500 | 1 100 | 15 |
| *50740 | H75PAR30/FL/5M/130V/STD | 75 | E26 | 130 | 2 800 | 40 | Flood | 2 000 | 5 000 | 825 | 15 |
| **PAR30LN** | | | | | | | | | | | |
| MOL : 4 15/16 in. (122 mm) Dia. : 3 3/4 in. (95 mm) | | | | | | | | | | | |
| *50229 | H50PAR30/LN/NSP/2.5M/120V/STD | 50 | E26 | 120 | 2 800 | 9 | Narrow Spot | 5 000 | 2 500 | 660 | 90 |
| *50084 | H50PAR30/LN/NFL/5M/130V/STD | 50 | E26 | 130 | 2 800 | 25 | Narrow Flood | 2 000 | 5 000 | 495 | 15 |
| *10384 | H50PAR30/LN/FL/2.5M/120V/STD | 50 | E26 | 120 | 2 800 | 40 | Flood | 1 350 | 2 500 | 660 | 15 |
| *50741 | H50PAR30/LN/FL/5M/130V/STD | 50 | E26 | 130 | 2 800 | 40 | Flood | 1 350 | 5 000 | 495 | 15 |
| *50052 | H75PAR30/LN/NSP/2.5M/120V/STD | 75 | E26 | 120 | 2 800 | 9 | Narrow Spot | 8 000 | 2 500 | 1 100 | 15 |
| *50051 | H75PAR30/LN/NFL/2.5M/120V/STD | 75 | E26 | 120 | 2 800 | 25 | Narrow Flood | 2 400 | 2 500 | 1 100 | 90 |
| *10388 | H75PAR30/LN/FL/2.5M/120V/STD | 75 | E26 | 120 | 2 800 | 40 | Flood | 2 000 | 2 500 | 1 100 | 15 |
| *50742 | H75PAR30/LN/FL/5M/130V/STD | 75 | E26 | 130 | 2 800 | 40 | Flood | 2 000 | 5 000 | 825 | 15 |


DIMMABLE

UV STOP

*[1]This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.*
** Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.*

# Reflector Lamps

| Order code | Description | Watts (W) | Base | Volts (V) | Colour temp. (K) | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|
| **PAR36** | | | | | | | | | | | |
| MOL : 2 3/4 in. (70 mm) Dia. : 4 1/2 in. (114 mm) | | | | | | | | | | | |
| 15269 | H36PAR36/NSP/4M/ST/12V | 36 | **ST G53 | 12 | 3 000 | 13 | Narrow Spot | 3 500 | 4 000 | N/A | 12 |
| 15268 | H36PAR36/WFL/4M/ST/12V | 36 | **ST G53 | 12 | 2 950 | 30 | Wide Flood | 1 000 | 4 000 | N/A | 12 |
| 15271 | H50PAR36/NSP/4M/ST/12V | 50 | **ST G53 | 12 | 3 050 | 8 | Narrow Spot | 10 000 | 4 000 | 400 | 12 |
| **PAR38** | | | | | | | | | | | |
| MOL : 5 5/16 in. (135 mm) Dia. : 4 3/4 in. (121 mm) | | | | | | | | | | | |
| 50743*[2] | H45PAR38/FL/5M/MS/130V/STD | 45 | E26SKT | 130 | 2 800 | 36 | Flood | 1 700 | 5 000 | 390 | 15 |
| 51109*[2] | H60PAR38/FL/5M/MS/130V/STD | 60 | E26SKT | 130 | 2 800 | 36 | Flood | 1 800 | 5 000 | 585 | 15 |
| 50113*[2] | H75PAR38/FL/2.5M/MS/120V/STD | 75 | E26SKT | 120 | 2 800 | 36 | Flood | 2 400 | 2 500 | 1 100 | 15 |
| 50744*[1 2] | H75PAR38/FL/5M/MS/130V/STD | 75 | E26SKT | 130 | 2 800 | 36 | Flood | 2 400 | 5 000 | 825 | 15 |
| 10106* [2] | H90PAR38/FL/2.5M/MS/120V/STD | 90 | E26SKT | 120 | 2 800 | 36 | Flood | 3 000 | 2 500 | 1 270 | 15 |
| 50745* [2] | H90PAR38/FL/5M/MS/130V/STD | 90 | E26SKT | 130 | 2 800 | 36 | Flood | 3 000 | 5 000 | 950 | 15 |
| 51082* [2] | H120PAR38/FL/2.5M/MS/120V/STD | 120 | E26SKT | 120 | 2 800 | 36 | Flood | 4 000 | 2 500 | 1 740 | 15 |
| **PAR56** | | | | | | | | | | | |
| MOL : 4 7/16 in. (113 mm) Dia. : 7 in. (173 mm) | | | | | | | | | | | |
| 43494 | Q500PAR56NSP | 500 | GX16d | 120 | 2 950 | 32 | Narrow Spot | 96 000 | 4 000 | 8 000 | 6 |
| 43495 | Q500PAR56MFL | 500 | GX16d | 120 | 2 950 | 42 | Flood | 43 000 | 4 000 | 8 000 | 6 |
| 43496 | Q500PAR56WFL | 500 | GX16d | 120 | 2 950 | 66 | Wide Flood | 19 000 | 4 000 | 8 000 | 6 |
| **PAR64** | | | | | | | | | | | |
| MOL : 6 1/32 in. (153 mm) Dia. : 8 in. (203 mm) | | | | | | | | | | | |
| 43497 | Q1000PAR64NSP | 1 000 | GX16d (Ext.) | 120 | 3 000 | 31 | Narrow Spot | 200 000 | 4 000 | 19 400 | 90 |
| 11190 | Q1000PAR64MFL | 1 000 | GX16d (Ext.) | 120 | 3 000 | 45 | Flood | 80 000 | 4 000 | 19 400 | 15 |
| 43499 | Q1000PAR64/WFL | 1 000 | GX16d (Ext.) | 120 | 3 000 | 72 | Wide Flood | 33 000 | 4 000 | 19 400 | 15 |

***ST = Screw terminal*

**ALR LAMPS** are halogen aluminium reflector lamps. They are a lightweight compact light source and are mainly used in display lighting, accent lighting, task lighting and elevator.




| Order code | Description | ANSI code | Watts (W) | Base | Volts (V) | Colour temp. (K) | Colour/ Finish | Beam angle (°) | Beam spread | CBCP (cd) | Average life (hrs) | Initial lumens (lm) | Case qty |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **ALR12 - Cover Glass** | | | | | | | | | | | | | |
| MOL : 1 17/32 in. (39 mm) Dia. : 1 1/2 in. (38 mm) | | | | | | | | | | | | | |
| 11068 | 20ALR12/NSP6-GBD | GBD | 20 | BA15d | 12 | 3 000 | Clear | 6 | Narrow Spot | 7 000 | 2 000 | 250 | 50 |
| 55061 | 20ALR12/F/SP/BA15d/12V/GBE STD | GBE | 20 | BA15d | 12 | 3 000 | Frost | 18 | Spot | 1 000 | 2 000 | 1 500 | 20 |
| 55062 | 20ALR12/F/FL/BA15d/12V/GBF STD | GBF | 20 | BA15d | 12 | 3 000 | Frost | 32 | Flood | 400 | 2 000 | 750 | 20 |
| **ALR18 - Cover Glass** | | | | | | | | | | | | | |
| MOL : 2 1/2 in. (57 mm) Dia. : 2 1/4 in. (57 mm) | | | | | | | | | | | | | |
| 55010 | H50ALR18/SP/CL/DC/12V/GBJ STD | GBJ | 50 | BA15d | 12 | 3 000 | Clear | 10 | Spot | 13 900 | 2 000 | N/A | 25 |
| 55011 | H50ALR18/NFL/F/DC/12V/GBK STD | GBK | 50 | BA15d | 12 | 3 000 | Frost | 25 | Narrow Flood | 1 900 | 2 000 | N/A | 50 |

DIMMABLE

# Halogen Lamps

Standard Products

StandardProInc

Standardproducts

Standard Products Inc

STANDARD Products Inc

STANDARD Products Inc

STANDARD®

www.standardpro.com

PRINTED IN CANADA. SUBJECT TO CHANGE WITHOUT NOTICE. COPYRIGHT © STANDARD PRODUCTS INC. 2015. ALL RIGHTS RESERVED. Halogen2015-Halogen BROCHURE_EN_OCTOBER 2015