



PAR20



PAR38



Satin Lamps

Order code	Description	Watts (W)	Base	Volts (V)	Finish	Average life (hrs)	Mean lumens (lm)	Case qty
------------	-------------	-----------	------	-----------	--------	--------------------	------------------	----------

PAR20

MOL : 3 7/32 in. (82 mm) Dia. : 2 1/2 in. (64 mm)

*59751	H50PAR20/NFL/2.5M/120V/ELUME SAT	50	E26	120	Frost	2 500	500	15
*59753	H50PAR20/NFL/5M/130V/ELUME SAT	50	E26	130	Frost	5 000	375	15

PAR38

MOL : 5 1/16 in. (135 mm) Dia. : 4 3/4 in. (121 mm)

*59750	H90PAR38/FL/MS/5M/130V/ELUME SAT	90	E26SKT	130	Frost	5 000	1 140	15
*59756	H90PAR38/FL/MS/2.5M/120V/ELUME SAT	90	E26SKT	120	Frost	2 500	855	15

¹This product is no longer manufactured as per Energy Efficiency Regulations, note that it will remain available until stock is depleted.

* Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.

PAR20



PAR30



Order code	Description	Watts (W)	Base	Volts (V)	Finish	Beam angle (°)	Average life (hrs)	Mean lumens (lm)	Case qty
------------	-------------	-----------	------	-----------	--------	----------------	--------------------	------------------	----------

PAR20

MOL : 3 7/32 in. (82 mm) Dia. : 2 1/2 in. (64 mm)

*55564	H50PAR20/NFL/2.5M/120V/ELUME	50	E26	120	Clear	30	2 500	550	120
--------	------------------------------	----	-----	-----	-------	----	-------	-----	-----


PAR30

MOL : 3 21/32 in. (93 mm) Dia. : 3 3/4 in. (95 mm)

*57655	H50PAR30/FL/5M/130V/ELUME	50	E26	130	Clear	35	5 000	495	15
--------	---------------------------	----	-----	-----	-------	----	-------	-----	----

* Cannot be sold in Ontario as per provincial regulations on energy efficiency of lighting products.

Halogen Lamps

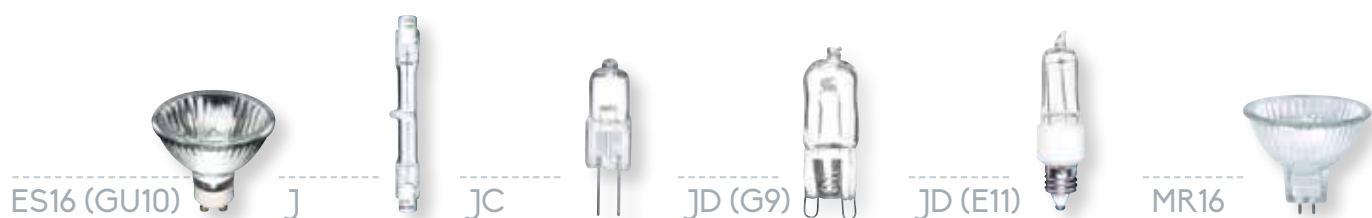

Order code	Description	Watts (W)	Base	Volts (V)	Finish	Beam angle (°)	Average life (hrs)	Initial lumens (lm)	Case qty
ES16									
MOL : 2 1/2 in. (55 mm) Dia. : 2 in. (51 mm)									
55563	H50GU10/FL/2.5M/120V/ELUME	50	GU10	120	Clear	35	2 500	475	12
J									
MOL : 3 1/2 in. (79 mm) Dia. : 1 3/32 in. (10 mm)									
55582	H100T3/79mm/R7S/130V/ELUME 2P	100	R7S	130	Clear	N/A	2 000	1 150	12
55583	H150T3/79mm/R7S/130V/ELUME 2P	150	R7S	130	Clear	N/A	2 000	2 280	24
55585	H500T3/119mm/R7S/130V/ELUME 2P	500	R7S	130	Clear	N/A	2 000	9 450	12
JC									
MOL : 1 7/32 in. (31 mm) Dia. : 1 1/32 in. (9 mm)									
55586	H10JC/2M/G4/12V/ELUME 2P	10	G4	12	Clear	N/A	2 000	95	12
55587	H20JC/2M/G4/12V/ELUME 2P	20	G4	12	Clear	N/A	2 000	240	12
55588	H50JC/2M/GY6.35/12V/ELUME 2P	50	GY6.35	12	Clear	N/A	2 000	785	12
JD									
G9 - MOL : 1 2 1/2 in. (42 mm) Dia. : 1 5/32 in. (12 mm) E11 - MOL : 2 7/16 in. (62 mm) Dia. : 1 3/32 in. (10 mm)									
59227	H40JD/42MM/CL/2M/G9/130V/ELUME	40	G9	130	Clear	N/A	2 000	450	100
59228	H40JD/42MM/F/2M/G9/130V/ELUME	40	G9	130	Frost	N/A	2 000	450	100
59229	H50JD/42MM/CL/2M/G9/130V/ELUME	50	G9	130	Clear	N/A	2 000	550	100
59225	H50JD/42MM/F/2M/G9/130V/ELUME	50	G9	130	Frost	N/A	2 000	550	100
55589	H75T3/CL/2M/E11/130V/ELUME 2P	75	E11	130	Clear	N/A	2 000	1 200	12
MR16									
MOL : 3 1/2 in. (44 mm) Dia. : 2 in. (51 mm)									
55591	H20MR16/FL/2M/GU5.3/12V/ELUME 2P	20	GU5.3	12	Clear	38	2 000	245	12
55592	H35MR16/FL/2M/GU5.3/12V/ELUME 2P	35	GU5.3	12	Clear	38	2 000	430	60
55593	H50MR16/FL/2M/GU5.3/12V/ELUME 2P	50	GU5.3	12	Clear	38	2 000	645	60
55594	H50MR16/FL/CG/GU5.3/12V/ELUME 2P	50	GU5.3	12	Clear	38	2 000	630	12