



Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

## ORDERING INFORMATION

Order code: 64366  
 Description: RF5in/NC/IC/E26/STD  
 UPC: 69549643666  
 Case quantity: 6

## SPECIFICATIONS

Type: New Construction - IC Airtight  
 Housing material: Industrial-strength aluminum  
 Can diameter: 5" (127 mm)  
 Cutting hole diameter: 5 3/4" (146 mm)  
 Sockets: E26  
 Volts (V): 120  
 Thermal protection: Yes  
 Junction box: Yes  
 Push-in connectors: Yes

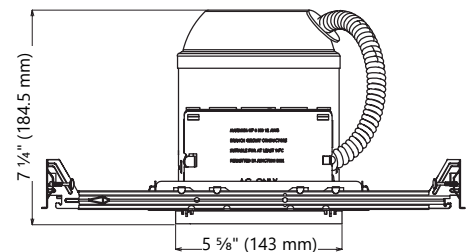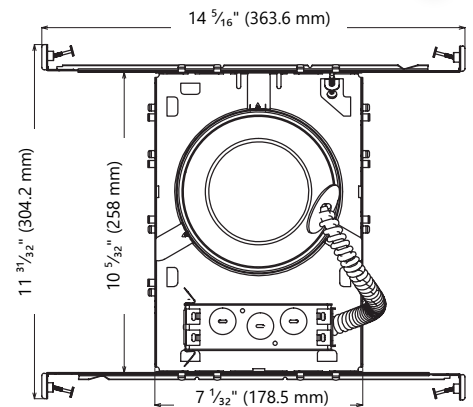

\*For complete warranty information please visit [www.standardpro.com](http://www.standardpro.com)

Max. of 4 no. 12 AWG through branch circuit conductor suitable for 90°C permitted in box.

## INSTALLATION

- Screw adjusting system
- Permits the installation in ceilings up to 2 in. in thickness
- Suitable for double drywall application
- Hanger bars included with pre-integrated nails
- Push-in connectors



## ORDERING INFORMATION

Order code: 64366  
 Description: RF5in/NC/IC/E26/STD  
 UPC: 69549643666  
 Case quantity: 6

## COMPATIBLE LAMPS AND TRIMS

Compatible lamps	Max Wattage (W)	Compatible STANDARD trims
PAR30	50	65524
PAR30	75	64390, 64392, 64395, 64393, 64394, 64391, 65525

## CAUTIONS

- Turn power off before inspection, installation, or removal
- Risk of electric shock – do not use where directly exposed to water or weather
- Risk of fire. Blinking light of this thermally protected fixture may indicate overheating
- Minimum 90 °C supply conductor
- May be interconnected using the same circuit
- Use with STANDARD trims only

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_