



LED Veloce™



The range of Veloce™ LED downlights is an ideal solution to replace fixtures in existing installations as well as for use in new construction. As it operates on a 1-10 V dimming system, this series is best suited for commercial applications.

This series is available in 4", 6", and 8" replacement options, and it does not require the use of a housing. The LED module is fitted with an external dimmable driver and is mounted into the ceiling using torsion springs.

- High light output
- Defined beam with the clear lens (45°) or diffused lighting with the frost lens (70°)
- Anti-glare reflector design
- Variety of interchangeable reflectors and baffles

LED Veloce™ 4



01

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	CBCP (cd)	Baffle colour	Traditional equivalent (W)		Case qty (master)
											CFL	HID	
Clear Lens													
64744	VELOCE4/MOD/13W/30K/45/SLV/STD	13	120-277	3 000	1 160	90	50 000	45	1 648	Silver	26	20	4
64750	VELOCE4/MOD/13W/30K/45/BLK/STD	13	120-277	3 000	1 160	90	50 000	45	1 648	Black	26	20	4
64756	VELOCE4/MOD/13W/30K/45/WH/STD	13	120-277	3 000	1 160	90	50 000	45	1 648	White	26	20	4
64745	VELOCE4/MOD/13W/35K/45/SLV/STD	13	120-277	3 500	1 160	90	50 000	45	1 781	Silver	26	20	4
64751	VELOCE4/MOD/13W/35K/45/BLK/STD	13	120-277	3 500	1 160	90	50 000	45	1 781	Black	26	20	4
64757	VELOCE4/MOD/13W/35K/45/WH/STD	13	120-277	3 500	1 160	90	50 000	45	1 781	White	26	20	4
64746	VELOCE4/MOD/13W/40K/45/SLV/STD	13	120-277	4 000	1 160	90	50 000	45	1 756	Silver	26	20	4
64752	VELOCE4/MOD/13W/40K/45/BLK/STD	13	120-277	4 000	1 160	90	50 000	45	1 756	Black	26	20	4
64758	VELOCE4/MOD/13W/40K/45/WH/STD	13	120-277	4 000	1 160	90	50 000	45	1 756	White	26	20	4

Frost Lens

64747	VELOCE4/MOD/F/13W/30K/70/SLV/STD	13	120-277	3 000	960	90	50 000	70	599	Silver	26	20	4
64753	VELOCE4/MOD/F/13W/30K/70/BLK/STD	13	120-277	3 000	960	90	50 000	70	599	Black	26	20	4
64759	VELOCE4/MOD/F/13W/30K/70/WH/STD	13	120-277	3 000	960	90	50 000	70	599	White	26	20	4
64748	VELOCE4/MOD/F/13W/35K/70/SLV/STD	13	120-277	3 500	960	90	50 000	70	624	Silver	26	20	4
64754	VELOCE4/MOD/F/13W/35K/70/BLK/STD	13	120-277	3 500	960	90	50 000	70	624	Black	26	20	4
64760	VELOCE4/MOD/F/13W/35K/70/WH/STD	13	120-277	3 500	960	90	50 000	70	624	White	26	20	4
64749	VELOCE4/MOD/F/13W/40K/70/SLV/STD	13	120-277	4 000	960	90	50 000	70	643	Silver	26	20	4
64755	VELOCE4/MOD/F/13W/40K/70/BLK/STD	13	120-277	4 000	960	90	50 000	70	643	Black	26	20	4
64761	VELOCE4/MOD/F/13W/40K/70/WH/STD	13	120-277	4 000	960	90	50 000	70	643	White	26	20	4

LED Driver


	System watts (W)	Max. load (W)	Input volts (VAC)	Output volts (VDC)	Input current (mA)
Veloce 4	16	18	120-277	30-42	350



Ø 3 17/32" (90 mm) up to
Ø 4 1/4" (100 mm)

Accessories

Order code	Description	Opening diameter (in.)	Type	Case qty (master)
66051	ACC/MPLATE/4.25IN/SQR/STD	4 1/4	Mounting plate	100
66058	ACC/MPLATE/4.25IN/ADJ/STD	4 1/4	Adjustable mounting plate	50
62678	ACC/MPLATE/4.25IN/HANG.BARS/STD	4 1/4	Mounting plate with hanger bars	20
62672	ACC/INSULATED BOX/3_4.5/STD	3 to 4 1/2	Insulated box with hanger bars	4
66143	ACC/4/VAPOR BARRIER/STD	4 1/4	Vapor barrier extender	50



Lumen values are derived from photometric testing.
For a complete list of compatible dimmers, please visit www.standardpro.com

LED Veloce™ 6



Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	CBCP (cd)	Baffle colour	Traditional equivalent (W)		Case qty (master)
											CFL	HID	

Clear Lens

64762	VELOCE6/MOD/18W/35K/45/SLV/STD	18	120-277	3 500	2 030	90	50 000	45	2 328	Silver	2 x 26	30	4
64766	VELOCE6/MOD/18W/35K/45/BLK/STD	18	120-277	3 500	2 030	90	50 000	45	2 328	Black	2 x 26	30	4
64770	VELOCE6/MOD/18W/35K/45/WH/STD	18	120-277	3 500	2 030	90	50 000	45	2 328	White	2 x 26	30	4
64763	VELOCE6/MOD/18W/40K/45/SLV/STD	18	120-277	4 000	2 030	90	50 000	45	2 364	Silver	2 x 26	30	4
64767	VELOCE6/MOD/18W/40K/45/BLK/STD	18	120-277	4 000	2 030	90	50 000	45	2 364	Black	2 x 26	30	4
64771	VELOCE6/MOD/18W/40K/45/WH/STD	18	120-277	4 000	2 030	90	50 000	45	2 364	White	2 x 26	30	4
64774	VELOCE6/MOD/26W/35K/45/SLV/STD	26	120-277	3 500	2 750	90	50 000	45	3 121	Silver	2 x 32	50	4
64778	VELOCE6/MOD/26W/35K/45/BLK/STD	26	120-277	3 500	2 750	90	50 000	45	3 121	Black	2 x 32	50	4
64782	VELOCE6/MOD/26W/35K/45/WH/STD	26	120-277	3 500	2 750	90	50 000	45	3 121	White	2 x 32	50	4
64775	VELOCE6/MOD/26W/40K/45/SLV/STD	26	120-277	4 000	2 750	90	50 000	45	3 237	Silver	2 x 32	50	4
64779	VELOCE6/MOD/26W/40K/45/BLK/STD	26	120-277	4 000	2 750	90	50 000	45	3 237	Black	2 x 32	50	4
64783	VELOCE6/MOD/26W/40K/45/WH/STD	26	120-277	4 000	2 750	90	50 000	45	3 237	White	2 x 32	50	4

Frost Lens

64764	VELOCE6/MOD/F/18W/35K/70/SLV/STD	18	120-277	3 500	1 860	90	50 000	70	980	Silver	2 x 26	30	4
64768	VELOCE6/MOD/F/18W/35K/70/BLK/STD	18	120-277	3 500	1 860	90	50 000	70	980	Black	2 x 26	30	4
64772	VELOCE6/MOD/F/18W/35K/70/WH/STD	18	120-277	3 500	1 860	90	50 000	70	980	White	2 x 26	30	4
64765	VELOCE6/MOD/F/18W/40K/70/SLV/STD	18	120-277	4 000	1 860	90	50 000	70	959	Silver	2 x 26	30	4
64769	VELOCE6/MOD/F/18W/40K/70/BLK/STD	18	120-277	4 000	1 860	90	50 000	70	959	Black	2 x 26	30	4
64773	VELOCE6/MOD/F/18W/40K/70/WH/STD	18	120-277	4 000	1 860	90	50 000	70	959	White	2 x 26	30	4
64776	VELOCE6/MOD/F/26W/35K/70/SLV/STD	26	120-277	3 500	2 500	90	50 000	70	1 331	Silver	2 x 32	50	4
64780	VELOCE6/MOD/F/26W/35K/70/BLK/STD	26	120-277	3 500	2 500	90	50 000	70	1 331	Black	2 x 32	50	4
64784	VELOCE6/MOD/F/26W/35K/70/WH/STD	26	120-277	3 500	2 500	90	50 000	70	1 331	White	2 x 32	50	4
64777	VELOCE6/MOD/F/26W/40K/70/SLV/STD	26	120-277	4 000	2 500	90	50 000	70	1 407	Silver	2 x 32	50	4
64781	VELOCE6/MOD/F/26W/40K/70/BLK/STD	26	120-277	4 000	2 500	90	50 000	70	1 407	Black	2 x 32	50	4
64785	VELOCE6/MOD/F/26W/40K/70/WH/STD	26	120-277	4 000	2 500	90	50 000	70	1 407	White	2 x 32	50	4

LED Drivers


	System watts (W)	Max. load (W)	Input volts (VAC)	Output volts (VAC)	Input current (mA)
Veloce 6 (18 W)	22	36	120-277	30-42	500
Veloce 6 (26 W)	30	36	120-277	30-42	700



Ø 6" (150 mm) up to
Ø 6 5/8" (165 mm)

Accessories

Order code	Description	Opening diameter (in.)	Type	Case qty (master)
66817	ACC/MPLATE/VELOCE6/HANG.BARS/STD	6	Mounting plate with hanger bars	8
64263	ACC/MPLATE/6.25IN/SQR/STD	6 1/4	Mounting plate	96
64921	ACC/MPLATE/6.25IN/ADJ/STD	6 1/4	Adjustable mounting plate	24
66144	ACC/6/VAPOR BARRIER/STD	6 7/32	Vapor barrier extender	50



LED Veloce™ 8

01



Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	CBCP (cd)	Baffle colour	Traditional equivalent (W)		Case qty (master)
											CFL	HID	
Clear Lens													
64786	VELOCE8/MOD/26W/35K/45/SLV/STD	26	120-277	3 500	2 800	90	50 000	45	2 517	Silver	2 x 32	50	4
64790	VELOCE8/MOD/26W/35K/45/BLK/STD	26	120-277	3 500	2 800	90	50 000	45	2 517	Black	2 x 32	50	4
64794	VELOCE8/MOD/26W/35K/45/WH/STD	26	120-277	3 500	2 800	90	50 000	45	2 517	White	2 x 32	50	4
64787	VELOCE8/MOD/26W/40K/45/SLV/STD	26	120-277	4 000	2 800	90	50 000	45	2 852	Silver	2 x 32	50	4
64791	VELOCE8/MOD/26W/40K/45/BLK/STD	26	120-277	4 000	2 800	90	50 000	45	2 852	Black	2 x 32	50	4
64795	VELOCE8/MOD/26W/40K/45/WH/STD	26	120-277	4 000	2 800	90	50 000	45	2 852	White	2 x 32	50	4
64798	VELOCE8/MOD/38W/40K/45/SLV/STD	38	120-277	4 000	3 950	90	50 000	45	4 092	Silver	2 x 42	70	4
64800	VELOCE8/MOD/38W/40K/45/BLK/STD	38	120-277	4 000	3 950	90	50 000	45	4 092	Black	2 x 42	70	4
64802	VELOCE8/MOD/38W/40K/45/WH/STD	38	120-277	4 000	3 950	90	50 000	45	4 092	White	2 x 42	70	4

Frost Lens

64788	VELOCE8/MOD/F/26W/35K/70/SLV/STD	26	120-277	3 500	2 490	90	50 000	70	1 468	Silver	2 x 32	50	4
64792	VELOCE8/MOD/F/26W/35K/70/BLK/STD	26	120-277	3 500	2 490	90	50 000	70	1 468	Black	2 x 32	50	4
64796	VELOCE8/MOD/F/26W/35K/70/WH/STD	26	120-277	3 500	2 490	90	50 000	70	1 468	White	2 x 32	50	4
64789	VELOCE8/MOD/F/26W/40K/70/SLV/STD	26	120-277	4 000	2 490	90	50 000	70	1 601	Silver	2 x 32	50	4
64793	VELOCE8/MOD/F/26W/40K/70/BLK/STD	26	120-277	4 000	2 490	90	50 000	70	1 601	Black	2 x 32	50	4
64797	VELOCE8/MOD/F/26W/40K/70/WH/STD	26	120-277	4 000	2 490	90	50 000	70	1 601	White	2 x 32	50	4
64799	VELOCE8/MOD/F/38W/40K/70/SLV/STD	38	120-277	4 000	3 500	90	50 000	70	2 282	Silver	2 x 42	70	4
64801	VELOCE8/MOD/F/38W/40K/70/BLK/STD	38	120-277	4 000	3 500	90	50 000	70	2 282	Black	2 x 42	70	4
64803	VELOCE8/MOD/F/38W/40K/70/WH/STD	38	120-277	4 000	3 500	90	50 000	70	2 282	White	2 x 42	70	4

LED Drivers

	System watts (W)	Max. load (W)	Input volts (VAC)	Output volts (VDC)	Input current (mA)
Veloce 8 (26 W)	30	36	120-277	30-42	700
Veloce 8 (36 W)	42	50	120-277	22-38	1 050




Ø 8 1/16" (205 mm) up to
Ø 8 11/16" (220 mm)

Accessory


Order code	Description	Opening diameter (in.)	Type	Case qty (master)
66818	ACC/MPLATE/VELOCE8/HANG.BARS/STD	8	Mounting plate with hanger bars	8




Veloce™ 4




Veloce™ 6



Veloce™ 8



Veloce™ 4, 6 and 8 LED Driver

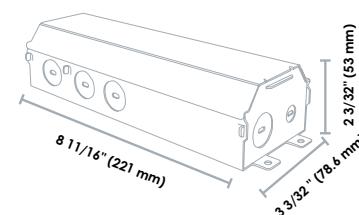1-2 SDCM
COLOUR BINNING

DIMMABLE



DRY

LOW UNIFIED
GLARE RATING5 YEARS
WARRANTY

Intertek

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers, please visit www.standardpro.com