

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 64898  
 Description: LED/PLVL/11W/27K/2P/ND/STD  
 UPC: 69549648982  
 Case quantity: 50

### PERFORMANCE DATA

Shape: PL Vertical Long  
 Base: G24d 2PIN  
 Watts (W): 11  
 Starting method: Ballast bypass and ballast compatible (magnetic)  
 Lamp voltage (VAC): 120 V-277 V / 347 V  
 Color temperature (K)\*\*: 2 700  
 Life L70 (hrs): 50 000  
 Initial Lumens (lm)\*: 947  
 Initial lumens per watt (lm/W): 86  
 CRI: 82  
 Beam angle (°): 120  
 Swivel rotation (°): 170  
 Operating temperature range: -20°C / -4°F to 45°C / 113°F

\*Initial lumens range: +/- 10 %


\*\*Typical colour temperature range: +/- 5 %



Please refer to the ballast compatibility list to confirm lamp compatibility with the existing luminaire.

### CAUTIONS


Turn power off before inspection, installation, or removal.  
 Risk of electrical shock – do not use where directly exposed to water or weather.  
 Not for use in totally enclosed luminaires.  
 Do not open – no user serviceable parts inside.  
 This device is not intended for use with emergency exit fixtures or emergency exit lights.  
 Not for use with dimmers.  
 This lamp only operates on magnetic ballasts or ballast bypass. If the lamp does not light up when the luminaire is energized, remove the lamp from the luminaire and contact the lamp manufacturer or a qualified electrician.

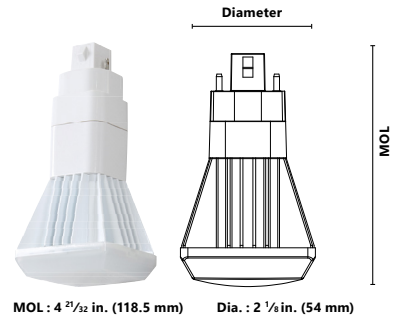

MOL : 4 2/32 in. (118.5 mm) Dia. : 2 1/8 in. (54 mm)

LED PL Base	CFL bases replacement
G24d-2P	G24d-2, G24d-3

NOTE: This LED lamp is a direct replacement for the CFL bases listed above. However, this LED lamp is compatible with all G24d CFL bases.



Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

May 3, 2016

**STANDARD®**