

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

ORDERING INFORMATION

Order code: 64899
 Description: LED/PLH/11W/27K/2P/ND/STD
 UPC: 69549648999
 Case quantity: 50

PERFORMANCE DATA

Shape: PL Horizontal
 Base: G24d 2PIN
 Watts (W): 11
 Starting method: Ballast bypass and ballast compatible (magnetic)
 Lamp voltage (VAC): 120 V-277 V / 347 V
 Color temperature (K)**: 2 700
 Life L70 (hrs): 50 000
 Initial Lumens (lm)*: 962
 Initial lumens per watt (lm/W): 87
 CRI: 82
 Beam angle (°): 120
 Swivel rotation (°): 170
 Operating temperature range: -20°C / -4°F to 45°C / 113°F

*Initial lumens range: +/- 10 %


**Typical colour temperature range: +/- 5 %



Please refer to the ballast compatibility list to confirm lamp compatibility with the existing luminaire.

CAUTIONS


Turn power off before inspection, installation, or removal.
 Risk of electrical shock – do not use where directly exposed to water or weather.
 Not for use in totally enclosed luminaires.
 Do not open – no user serviceable parts inside.
 This device is not intended for use with emergency exit fixtures or emergency exit lights.
 Not for use with dimmers.
 This lamp only operates on magnetic ballasts or ballast bypass. If the lamp does not light up when the luminaire is energized, remove the lamp from the luminaire and contact the lamp manufacturer or a qualified electrician.

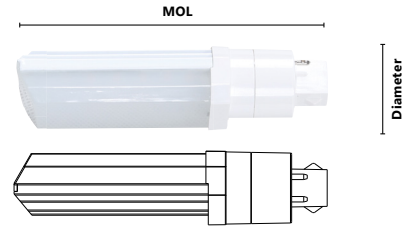

MOL : 5 3/16 in. (132 mm) Dia. : 1 5/8 in. (41 mm)

LED PL Base	CFL bases replacement
G24d-2P	G24d-2, G24d-3

NOTE: This LED lamp is a direct replacement for the CFL bases listed above. However, this LED lamp is compatible with all G24d CFL bases.



Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

May 3, 2016

STANDARD