

01 LED Gimbal



LED Gimbal Downlights are easy to install and allow you to direct the light where needed! The interchangeable trims offered in a variety of shapes, sizes and finishes, give you many options to choose from. Whether in new construction or in retrofit applications, the module and trim combination will fit any application!

- Small aperture designed for a sleek and glare free result
- Light output comparable to a PAR20 halogen lamp
- 24° tilt and 360° module rotation to light any direction




LED Modules and Drivers


Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	CBCP (cd)	Finish	Traditional equivalent (W)	Case qty (master)
Warm Dim Modules												
65981	LED/DL/GIMBAL/MOD/7W/30-22K/WH/STD	7	120	3 000-2 200	470	90	30 000	40	800	White	50	18
65982	LED/DL/GIMBAL/MOD/7W/30-22K/BN/STD	7	120	3 000-2 200	470	90	30 000	40	800	Brushed nickel	50	18
Modules												
65420	LED/DL/GIMBAL/MOD/7W/30K/WH/STD	7	120	3 000	600	80	36 000	40	1 100	White	50	18
65422	LED/DL/GIMBAL/MOD/7W/30K/BN/STD	7	120	3 000	600	80	36 000	40	1 100	Brushed nickel	50	18
65421	LED/DL/GIMBAL/MOD/7W/40K/WH/STD	7	120	4 000	620	80	36 000	40	1 200	White	50	18
65423	LED/DL/GIMBAL/MOD/7W/40K/BN/STD	7	120	4 000	620	80	36 000	40	1 200	Brushed nickel	50	18

Trims


Order code	Description	Finish	Type	Case qty (master)
3" Round				
65432	LED/DL/GIMBAL/3IN/TRIM/RND/FLAT/WH/STD	White	Flat	96
65433	LED/DL/GIMBAL/3IN/TRIM/RND/FLAT/BN/STD	Brushed nickel	Flat	96
66230	LED/DL/GIMBAL/3IN/TRIM/RND/FLAT/BK/STD	Black	Flat	96
65450	LED/DL/GIMBAL/3IN/TRIM/RND/CURVED/WH/STD	White	Curved	96
65451	LED/DL/GIMBAL/3IN/TRIM/RND/CURVED/BN/STD	Brushed nickel	Curved	96
3" Square				
65434	LED/DL/GIMBAL/3IN/TRIM/SQR/FLAT/WH/STD	White	Flat	96
65435	LED/DL/GIMBAL/3IN/TRIM/SQR/FLAT/BN/STD	Brushed nickel	Flat	96
66231	LED/DL/GIMBAL/3IN/TRIM/SQR/FLAT/BK/STD	Black	Flat	96
4" Round				
65436	LED/DL/GIMBAL/4IN/TRIM/RND/FLAT/WH/STD	White	Flat	96
65437	LED/DL/GIMBAL/4IN/TRIM/RND/FLAT/BN/STD	Brushed nickel	Flat	96
66232	LED/DL/GIMBAL/4IN/TRIM/RND/FLAT/BK/STD	Black	Flat	96
4" Square				
65438	LED/DL/GIMBAL/4IN/TRIM/SQR/FLAT/WH/STD	White	Flat	96
65439	LED/DL/GIMBAL/4IN/TRIM/SQR/FLAT/BN/STD	Brushed nickel	Flat	96
66233	LED/DL/GIMBAL/4IN/TRIM/SQR/FLAT/BK/STD	Black	Flat	96

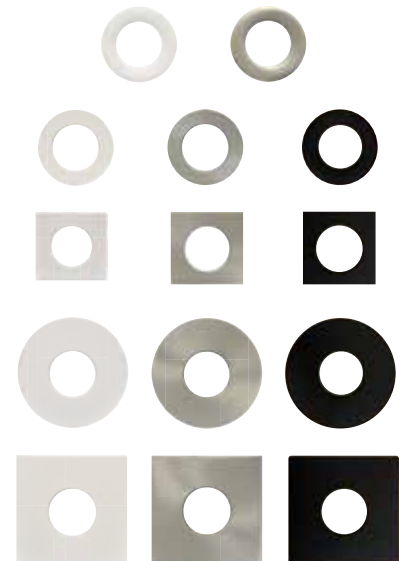

Dimensions




Module

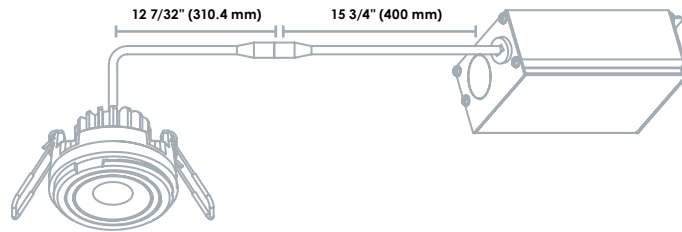

LED Module and Driver




Ø 2 3/4" (70 mm)

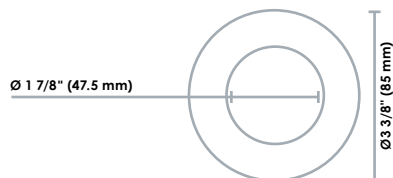

Ø 1 7/8" (47.5 mm)

Ø 3 3/8" (85 mm)

3" Trim

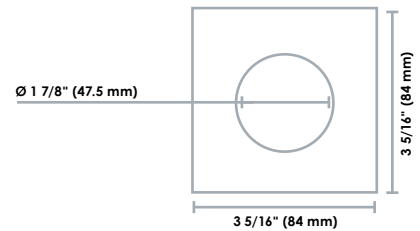


Ø 1 7/8" (47.5 mm)

3 5/16" (84 mm)

3" Trim




Ø 2 3/4" - 4 1/4" (70-108 mm)

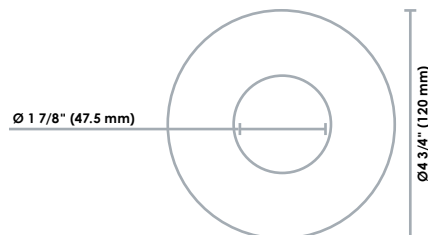

Ø 1 7/8" (47.5 mm)

Ø 4 3/4" (120 mm)

4" Trim

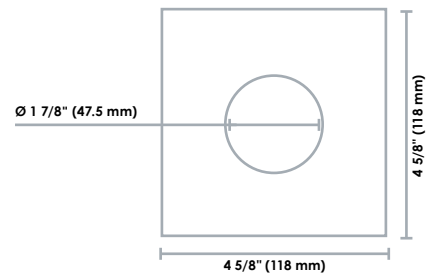

Ø 1 7/8" (47.5 mm)

4 5/8" (118 mm)

4" Trim

Accessories

Order code	Description	Opening diameter (in.)	Type	Case qty (master)
66020	ACC/MPLATE/2.75IN/SQR/STD	2 3/4	Square mounting plate	96
66021	ACC/MPLATE/2.75IN/ADJ/STD	2 3/4	Adjustable mounting plate	24
66819	ACC/MPLATE/2.75IN/HANG.BARS/STD	2 3/4	Mounting plate with hanger bars	25
64264	LPDL/ACC/6FT/EXTCABLE/STD	-	6' extension cord	96
66142	ACC/3/VAPOR BARRIER/STD	3 5/8	Vapor barrier extender	50



AIRTIGHT



DAMP



DIMMABLE



IC RATED



QUICK CONNECT



WARM DIM



5 YEARS WARRANTY



ETL US Intertek



ENERGY STAR

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and ENERGY STAR
qualified products, please visit www.standardpro.com