



LED Fluorescent Replacement Lamps

Find the perfect LED alternative for fluorescent lamps while eliminating mercury content from your lighting system. Increased energy efficiency makes these lamps the ideal replacement for any application.

LED T8

- Compatible with a variety of traditional electronic instant start, rapid start and program start ballasts.
- Quality glass encasing ensures protection against tube yellowing and brittleness.
- Plug and play solution for easy installation while allowing the fixture to keep its certification, without any additional wiring needed.
- Significantly reduces costly re-lamping charges.
- No start-up time required compared to traditional fluorescent lamps.

LED T8 Metric

LED T8 Metric lamps are specifically designed for the Canadian market. With their 46" length, these tubes are perfect for many government building fixtures. Avoid costly and time consuming fixture replacements with this retrofit solution.



T8



T8 Metric

Order code	Description	Base	Average System Watts			Initial lumens ¹			Colour temp. (K)	CRI	Average life L70 (hrs)	Dimmable ³ (Y/N)	Case qty (inner/master)
			(W)			(lm)							
			LBF	NBF	HB ⁴	LBF	NBF	HB ⁴					
T8 2 ft													
65473	LED/T8/S4/9W/840/24/STD	G13	10	12	16	1 100	1 350	1 800	4 000	80	50 000	Y	1/25
T8 3 ft ²													
63632	LED/T8/11W/840/36/STD	G13	12	14	18	1 305	1 500	1 900	4 000	86	50 000	Y	1/25
64663	LED/T8/S3/13W/840/36/STD	G13	15	16	20	1 500	1 600	2 000	4 000	83	50 000	N	1/25
T8 4 ft													
65474	LED/T8/S4/13W/835/48/STD	G13	14	16	22	1 550	1 800	2 400	3 500	80	50 000	Y	1/25
65475	LED/T8/S4/13W/840/48/STD	G13	14	16	22	1 600	1 900	2 450	4 000	80	50 000	Y	1/25
65476	LED/T8/S4/13W/850/48/STD	G13	14	16	22	1 700	2 000	2 500	5 000	80	50 000	Y	1/25
65477	LED/T8/S4/15W/835/48/STD	G13	16	18	26	1 750	2 000	2 800	3 500	80	50 000	Y	1/25
65478	LED/T8/S4/15W/840/48/STD	G13	16	18	26	1 800	2 100	2 850	4 000	80	50 000	Y	1/25
65479	LED/T8/S4/15W/850/48/STD	G13	16	18	26	1 900	2 200	2 900	5 000	80	50 000	Y	1/25
T8 Metric - 46 in. ²													
65049	LED/T8/15W/835/46/METRIC/STD	G13	16	18	26	1 650	1 850	2 650	3 500	83	50 000	N	1/25
65050	LED/T8/15W/840/46/METRIC/STD	G13	16	18	26	1 700	1 950	2 750	4 000	83	50 000	N	1/25

¹ Typical lumens +/- 10 %

² Not DLC

³ For a complete list of compatible dimmers and DLC qualified products, please visit www.standardpro.com

⁴ LBF= Low ballast factor, NBF= Neutral ballast factor, HB⁴= High ballast factor



LED Safety Max

With the same advantages as regular LED T8 lamps, safety coated lamps are shatterproof to protect employees, production, customers and your business reputation.

- PTFE coated lamps will contain the broken glass if a lamp is shattered.
- All lamps are NSF rated for food equipment safety.
- Perfect solution for commercial kitchens, art galleries, museums and schools.



Safety Max T8 - S3

Order code	Description	Base	Average System Watts			Initial lumens ¹			Colour temp. (K)	CRI	Average life L70 (hrs)	Dimmable ³ (Y/N)	Case qty (inner/master)
			(W)			(lm)							
			LBF	NBF	HBF ⁴	LBF	NBF	HBF					
T8 2 ft													
65504	LED/T8/S3/9W/830/24/STD/SMX	G13	10	12	16	1 000	1 200	1 600	3 000	83	50 000	N	1/25
65505	LED/T8/S3/9W/835/24/STD/SMX	G13	10	12	16	1 000	1 200	1 600	3 500	83	50 000	N	1/25
65506	LED/T8/S3/9W/840/24/STD/SMX	G13	10	12	16	1 000	1 200	1 600	4 000	83	50 000	N	1/25
T8 3 ft ²													
64817	LED/T8/S3/13W/830/36/STD/SMX	G13	15	16	20	1 500	1 600	2 000	3 000	83	50 000	N	1/25
64818	LED/T8/S3/13W/835/36/STD/SMX	G13	15	16	20	1 500	1 600	2 000	3 500	83	50 000	N	1/25
64833	LED/T8/S3/13W/840/36/STD/SMX	G13	15	16	20	1 500	1 600	2 000	4 000	83	50 000	N	1/25
T8 4 ft													
65507	LED/T8/S4/13W/830/48/STD/SMX	G13	12	16	23	1 400	1 750	2 300	3 000	80	50 000	N	1/25
65508	LED/T8/S4/13W/835/48/STD/SMX	G13	12	16	23	1 450	1 800	2 350	3 500	80	50 000	N	1/25
65509	LED/T8/S4/13W/840/48/STD/SMX	G13	12	16	23	1 500	1 900	2 650	4 000	80	50 000	N	1/25
65510	LED/T8/S4/13W/850/48/STD/SMX	G13	12	16	23	1 600	2 000	2 700	5 000	80	50 000	N	1/25
65511	LED/T8/S4/15W/830/48/STD/SMX	G13	14	18	25	1 550	1 950	2 650	3 000	80	50 000	N	1/25
65512	LED/T8/S4/15W/835/48/STD/SMX	G13	14	18	25	1 600	2 000	2 700	3 500	80	50 000	N	1/25
65513	LED/T8/S4/15W/840/48/STD/SMX	G13	14	18	25	1 650	2 100	2 750	4 000	80	50 000	N	1/25
65514	LED/T8/S4/15W/850/48/STD/SMX	G13	14	18	25	1 750	2 200	2 800	5 000	80	50 000	N	1/25


¹ Typical lumens +/- 10 %

² Not DLC


³ For a complete list of compatible dimmers and DLC qualified products, please visit www.standardpro.com

⁴ LBF= Low ballast factor, NBF= Neutral ballast factor, HB⁴= High ballast factor





U-Bent U1

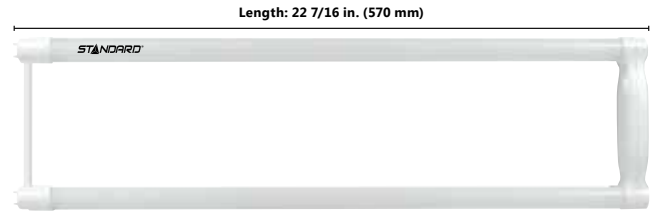

U-Bent U6

Order code	Description	Base	Average System Watts			Initial lumens ¹			Colour temp. (K)	CRI	Average life L70 (hrs)	Dimmable ³	Case qty
			(W)			(lm)						(Y/N)	(Inner/master)
			LBF	NBF	HB ⁴	LBF	NBF	HB ⁴					
U-Bent ²													
64320	LED/T8/17W/840/48/U1/ND/STD/SMX	G13	18	20	27	2 050	2 370	3 080	4 000	82	50 000	N	1/12
64331	LED/T8/12W/835/48/U6/ND/STD/SMX	G13	13	15	20	1 520	1 750	2 220	3 500	82	50 000	N	1/12
64321	LED/T8/12W/840/48/U6/ND/STD/SMX	G13	13	15	20	1 590	1 840	2 320	4 000	82	50 000	N	1/12
64322	LED/T8/17W/840/48/U6/ND/STD/SMX	G13	18	20	27	2 050	2 370	3 080	4 000	82	50 000	N	1/12



T5

Order code	Description	Watts	Base	Colour	CRI	Average	Initial	Dimmable ³	Length	Case qty
		(W)		temp. (K)		life L70 (hrs)	lumens ¹ (lm)	(Y/N)	in. (mm)	(inner/master)
T5 46 in.										
65480	LED/T5/S2/25.5W/840/46/STD/SMX	25.5	G5	4 000	>80	50 000	3 100	Y	46 (1 168)	1/25
65481	LED/T5/S2/25.5W/850/46/STD/SMX	25.5	G5	5 000	>80	50 000	3 150	Y	46 (1 168)	1/25
65482	LED/T5/S2/25.5W/865/46/STD/SMX	25.5	G5	6 500	>80	50 000	3 200	Y	46 (1 168)	1/25

¹ Typical lumens +/- 10 %

² Not DLC

³ For a complete list of compatible dimmers and DLC qualified products, please visit www.standardpro.com

⁴ LBF= Low ballast factor, NBF= Neutral ballast factor, HB⁴= High ballast factor



CONFORMS TO NSF/ANSI 2