

# Technical Information Bulletin


## LED PL



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 65603  
Description: LED/PLL/19W/35K/2G11/ND/STD  
UPC: 69549656031  
Case quantity: 30

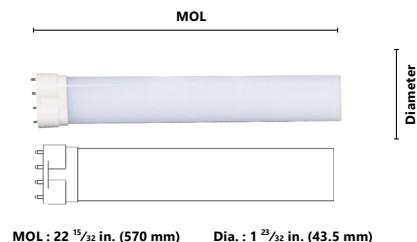

### PERFORMANCE DATA

Shape: PL Long  
Base: 2G11 - 4PIN  
Watts (W): 19  
Starting method: Program start  
Lamp voltage (VAC): 120-277 / 347  
Color temperature (K)\*\*: 3 500  
Life L70 (hrs): 50 000  
Initial Lumens (lm)\*: 1 900  
Initial lumens per watt (lm/W): 100  
CRI: 83  
Beam angle (°): 120  
Operating temperature range: -20°C / -4°F to 45°C / 113°F

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 5 %



Please refer to the ballast compatibility list to confirm lamp compatibility with the existing luminaire.

### ADDITIONAL INFORMATION

Turn power off before inspection, installation, or removal.

Risk of electrical shock – do not use where directly exposed to water or weather.

Do not open – no user serviceable parts inside.

This device is not intended for use with emergency exit fixtures or emergency exit lights.

Not for use with dimmers.

This lamp only operates on electronic ballasts. If the lamp does not light up when the luminaire is energized, remove the lamp from the luminaire and contact the lamp manufacturer or a qualified electrician.

Direct replacement for 40 W CFL lamps only.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance.  
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

September 11, 2019

# Technical Information Bulletin

## LED PL



### ORDERING INFORMATION

Order code: 65603  
 Description: LED/PLL/19W/35K/2G11/ND/STD  
 UPC: 69549656031  
 Case quantity: 30

### LED PLL BALLAST COMPATIBILITY LIST

#### 120-277 V

Ballast Description			1 Lamp		2 Lamps	
Brand	Order Code	Number of lamps	Input Voltage			
			120 V	277 V	120 V	277 V
Keystone	KTEB-242-UV-PS-DW	2				
	KTEB-242-UV-RS-DW	2				
Osram	QTP 2x26CF/UNV DM	2				
	QTP 2x26CF/UNV DM PEM	2				
	QTP 2x26/32/42CF/UNV DM PEM	2				
STANDARD	31526 - E22642-UV-A-TDE FLX	2				
	10469 - E23640-120-SL GLB	2				
	10445 - ED22150-120-277-SL GLB	2				
Universal	E2150-UV-S	2				
	ED2150-UV-BS	2				

#### 347 V

Ballast Description			1 Lamp	2 Lamps
Brand	Order Code	Number of lamps	Input Voltage	
			347 V	
STANDARD	31527 - E22642-347-A-TDE FLX	2		
	10470 - E23640-347-SL GLB	2		
	10449 - ED22150-347-BLS GLB	2		
Universal	E2150-347S	2		
	ED2150-347S	2		

■ compatible ■ non-compatible ■ N/A

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

September 11, 2019