

LED CFL Replacement Lamps

LED lamps are the ideal solution to replace plug-in compact fluorescent lamps and are just as easy to install. These LED lamps are available in 2-pin and 4-pin, as well as in horizontal and vertical models.

They are perfect for use in commercial buildings, hotels and offices by providing an eco-friendly and cost saving alternative to any ceiling fixture, recessed can, downlight or sconce.



MOL: 22 7/16" (570 mm)



Horizontal



2G11

Order code	Description	Watts	Base	Colour temp.	CRI	Life L70	Lumen output	Traditional equivalent (W)	Operating position	Case qty
		(W)		(K)		(hrs)	(lm)	CFL		(master)
PLL Electr	onic ballast compatible installati	on								
65603 ¹	LED/PLL/19W/35K/2G11/ND/STD	19	2G11	3 500	83	50 000	1 900	40	Horizontal	30
65604 ¹	LED/PLL/19W/40K/2G11/ND/STD	19	2G11	4 000	83	50 000	2 000	40	Horizontal	30












ST<u>\</u>NDARD°

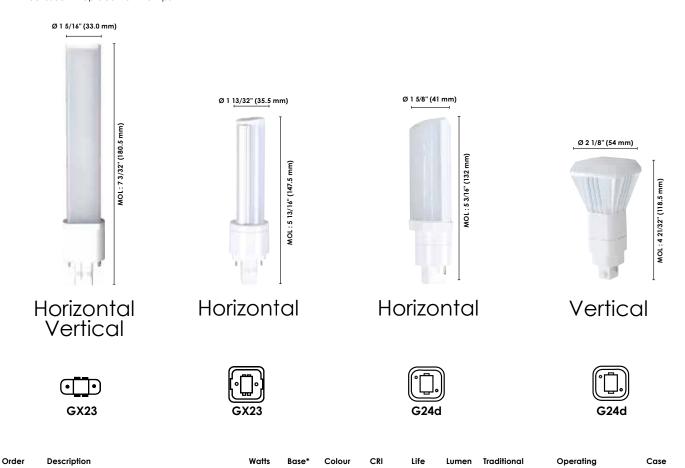

code				temp.		L70	output	equivalent (W)	position	qty
		(W)		(K)		(hrs)	(lm)	CFL		(inner/master)
PL 2- Dual in	p ins stallation: Ballast compatible or b	ypass								
65366 ¹	LED/PLV-H/6W/TT/27K/GX23/ND/STD	6	GX23	2 700	83	50 000	525	13	Vertical-Horizontal	1/20
65371 ¹	LED/PLH/6W/DTT/27K/GX23/ND/STD	6	GX23	2 700	83	50 000	500	13	Horizontal	10/50
653671	LED/PLV-H/6W/TT/40K/GX23/ND/STD	6	GX23	4 000	83	50 000	550	13	Vertical-Horizontal	1/20
65372 ¹	LED/PLH/6W/DTT/40K/GX23/ND/STD	6	GX23	4 000	83	50 000	525	13	Horizontal	10/50
64898 ¹	LED/PLVL/11W/27K/2P/ND/STD	11	G24d	2 700	82	50 000	947	18/26	Vertical	10/50
648991	LED/PLH/11W/27K/2P/ND/STD	11	G24d	2 700	82	50 000	962	18/26	Horizontal	10/50
64478 ¹	LED/PLVL/11W/40K/2P/ND/STD	11	G24d	4 000	84	50 000	1 144	18/26	Vertical	10/50
644791	LED/PLH/11W/40K/2P/ND/STD	11	G24d	4 000	85	50 000	1 132	18/26	Horizontal	10/50

*LED PL Bases	Replacement for CFL bases							
GX23	GX23, GX23-2							
G24d	G24d-2, G24d-3							

NOTE: These LED lamps are a direct replacement for the CFL bases listed above. However, the base compatibility of these LED lamps is not limited to the CFL bases mentioned above.























Horizontal 13 W





Vertical 13 W



Order code	Description	Watts	Base*	Colour temp.	CRI	Life L70	Lumen output	Traditional equivalent (W)	Operating position	Case qty
		(W)		(K)		(hrs)	(lm)	CFL		(inner/master)
PL 4-	pins									
	bypass installation									
65368 ¹	LED/PLH/6W/DTT/30K/G24q/ND/STD	6	G24q	3 000	83	50 000	525	13	Horizontal	10/50
653691	LED/PLH/6W/DTT/35K/G24q/ND/STD	6	G24q	3 500	83	50 000	500	13	Horizontal	10/50
65370	LED/PLH/6W/DTT/40K/G24q/ND/STD	6	G24q	4 000	83	50 000	525	13	Horizontal	10/50
Electro	onic ballast compatible installation	n								
64470 ²	LED/PLVL/13W/27K/4P/ND/STD	13	G24q	2 700	81	50 000	997	18/26	Vertical	10/50
644712	LED/PLH/13W/27K/4P/ND/STD	13	G24q	2 700	82	50 000	958	18/26	Horizontal	10/50
644722	LED/PLVL/13W/30K/4P/ND/STD	13	G24q	3 000	81	50 000	1 043	18/26	Vertical	10/50
64473 ²	LED/PLH/13W/30K/4P/ND/STD	13	G24q	3 000	81	50 000	1 027	18/26	Horizontal	10/50
644742	LED/PLVL/13W/35K/4P/ND/STD	13	G24q	3 500	80	50 000	1 118	18/26	Vertical	10/50
64475 ²	LED/PLH/13W/35K/4P/ND/STD	13	G24q	3 500	80	50 000	1 118	18/26	Horizontal	10/50
64476 ²	LED/PLVL/13W/40K/4P/ND/STD	13	G24q	4 000	84	50 000	1 166	18/26	Vertical	10/50
644772	LED/PLH/13W/40K/4P/ND/STD	13	G24q	4 000	85	50 000	1 162	18/26	Horizontal	10/50

*LED PL Bases	Replacement for CFL bases							
G24q-6W	G24q-1, GX24q-1							
G24q-13W	G24q-2, G24q-3, GX24q-2, GX24q-3							

NOTE: These LED lamps are a direct replacement for the CFL bases listed above. However, the base compatibility of these LED lamps is not limited to the CFL bases mentioned above.















Lumen values are derived from photometric testing

¹ This lamp only operates on ballast bypass installation in 120-277V applications
Not for use in 347V direct line voltage applications

²This lamp only operates on electronic ballasts in 120-277/347 V applications