


Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

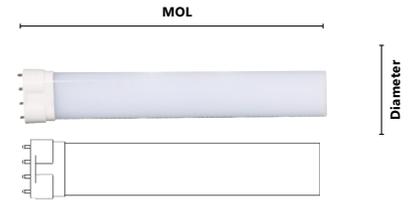

MOL : 22 15/32 in. (570 mm) Dia. : 1 23/32 in. (43.5 mm)

ORDERING INFORMATION

Order code: 65604
 Description: LED/PLL/19W/40K/2G11/ND/STD
 UPC: 69549656048
 Case quantity: 30

PERFORMANCE DATA

Shape: PL Long
 Base: 2G11 - 4PIN
 Watts (W): 19
 Starting method: Program start
 Lamp voltage (VAC): 120-277 / 347
 Color temperature (K)**: 4 000
 Average life (L70 hours): 50 000
 Initial Lumens (lm)*: 2 000
 Initial lumens per watt (lm/W): 105
 CRI: 83
 Beam angle (°): 120
 Operating temperature range: -20°C / -4°F to 45°C / 113°F

*Initial lumens range: +/- 10 % **Typical colour temperature range: +/- 5 %



CAUTIONS

Turn power off before inspection, installation, or removal.
 Risk of electrical shock – do not use where directly exposed to water or weather.
 Do not open – no user serviceable parts inside.
 This device is not intended for use with emergency exit fixtures or emergency exit lights.
 Not for use with dimmers.
 This lamp only operates on electronic ballasts. If the lamp does not light up when the luminaire is energized, remove the lamp from the luminaire and contact the lamp manufacturer or a qualified electrician.
 Direct replacement for 40 W CFL lamps only.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ORDERING INFORMATION

Order code: 65604
 Description: LED/PLL/19W/40K/2G11/ND/STD
 UPC: 69549656048
 Case quantity: 30

LED PLL BALLAST COMPATIBILITY LIST

120-277 V

Ballast Description			1 Lamp		2 Lamps	
Brand	Order Code	Number of lamps	Input Voltage			
			120 V	277 V	120 V	277 V
Keystone	KTEB-242-UV-PS-DW	2	Compatible	Compatible	Compatible	Compatible
	KTEB-242-UV-RS-DW	2	Compatible	Compatible	Compatible	Compatible
Osram	QTP 2x26CF/UNV DM	2	Compatible	Compatible	Compatible	Compatible
	QTP 2x26CF/UNV DM PEM	2	Compatible	Compatible	Compatible	Compatible
	QTP 2x26/32/42CF/UNV DM PEM	2	Compatible	Compatible	Compatible	Incompatible
STANDARD	31526 - E22642-UV-A-TDE FLX	2	Compatible	Compatible	Compatible	Compatible
	10469 - E23640-120-SL GLB	2	Compatible	Compatible	Compatible	Compatible
	10445 - ED22150-120-277-SL GLB	2	Incompatible	Incompatible	Compatible	Compatible
Universal	E2150-UV-S	2	Compatible	Compatible	Compatible	Compatible
	ED2150-UV-BS	2	Compatible	Incompatible	Compatible	Compatible

347 V

Ballast Description			1 Lamp		2 Lamps	
Brand	Order Code	Number of lamps	Input Voltage			
			347 V			
STANDARD	31527 - E22642-347-A-TDE FLX	2	Compatible	Compatible	Compatible	Compatible
	10470 - E23640-347-SL GLB	2	Compatible	Compatible	Compatible	Compatible
	10449 - ED22150-347-BLS GLB	2	Compatible	Compatible	Compatible	Compatible
Universal	E2150-347S	2	Compatible	Compatible	Compatible	Compatible
	ED2150-347S	2	Compatible	Compatible	Compatible	Compatible

■ compatible
 ■ non-compatible
 N/A

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.