



LED Linear


Our linear line is the best choice to replace traditional fluorescent strip luminaires with our integrated LED solution. Modernize your application with these efficient alternatives to traditional technology.

LED Striplight

These high quality luminaires are equipped with a frosted lens that diffuses the light comfortably. This series is a great option for retrofitting your traditional fluorescent linear luminaires to balance performance, aesthetics, and cost.




Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 ¹ (hrs)	Case qty (master)
2'								
65034	LSS/2FT/20W/40K/120-277/STD	20	120-277	4 000	2 600	80	100 000	6
4'								
66082	LSS/4FT/32W/40K/120-277/A1/STD	32	120-277	4 000	4 224	80	100 000	6
66170	LSS/S2/4FT/40W/40K/120-277/A1/STD	40	120-277	4 000	5 200	80	100 000	6
8'								
66127	LSS/8FT/65W/40K/120-277/A1/STD	65	120-277	4 000	8 580	80	100 000	1
66171	LSS/S2/8FT/75W/40K/120-277/A1/STD	75	120-277	4 000	9 750	80	100 000	1

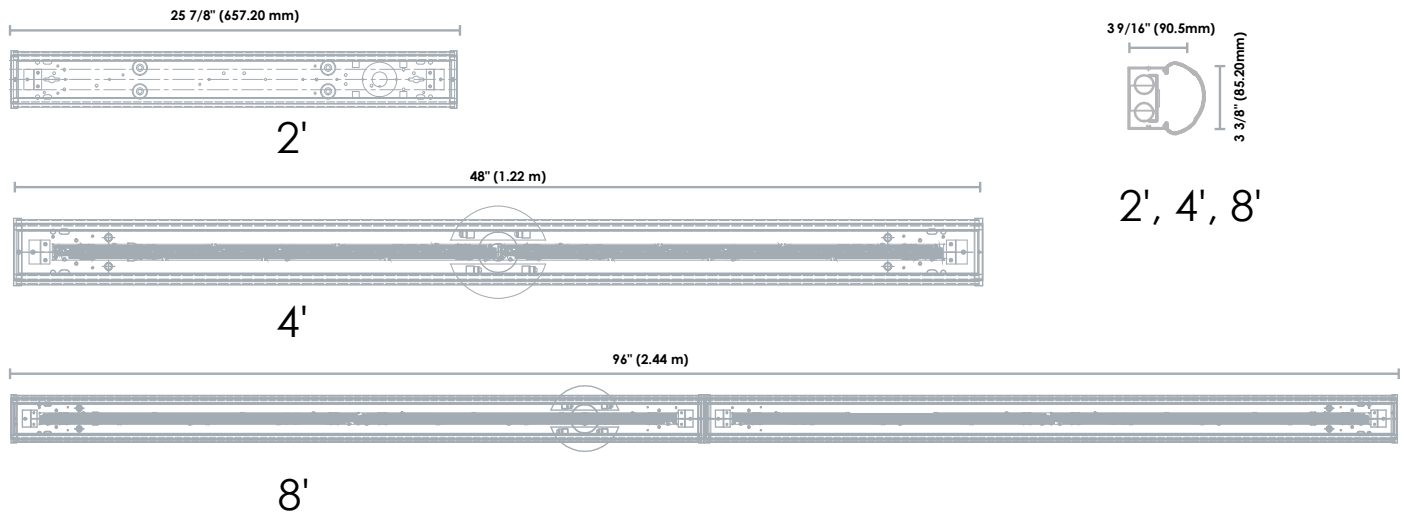

Accessories

Order code	Description	Type
66084	LSS/ACC/2FT/LENS/STD	Replacement lens for 2ft
66085	LSS/ACC/4FT/LENS/STD	Replacement lens for 4ft
66086	LSS/ACC/VHOOKCHAIN/STD	Hanger kit

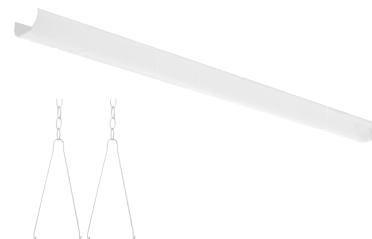

Lumen values are derived from photometric testing
For a complete list of compatible dimmers and DLC qualified products, please visit www.standardpro.com
¹Estimated life hours



DAMP



DIMMABLE



WARRANTY



Tri-Level Programmable Striplight

This tri-level programmable striplight has been designed to prevent energy loss in applications or spaces that require continuous lighting.


The luminaire increases energy savings while allowing users to wisely manage levels of luminosity in a given space. It features an integrated micro-wave motion sensor that regulates light levels according to occupancy of the space

Tri-Level programmable means:

- Detection of occupancy
- Detection of light levels in the room
- Dimming control of each individual light



Order code	Description	Watts	Volts	Colour temp.	Lumen output	Lumens per watts (lm/W)	CRI	Life L70	Sensor type	Case qty
		(W)	(VAC)	(K)	(lm)	(lm/W)		(hrs)		(master)
66083	LSS/4FT/TLEV/32W/40K/120-277/A1/STD	32	120-277	4 000	4 160	130	80	50 000	Microwave	6
66081	LSS/4FT/TLEV/40W/40K/120-277/A1/STD	40	120-277	4 000	5 200	130	80	50 000	Microwave	6

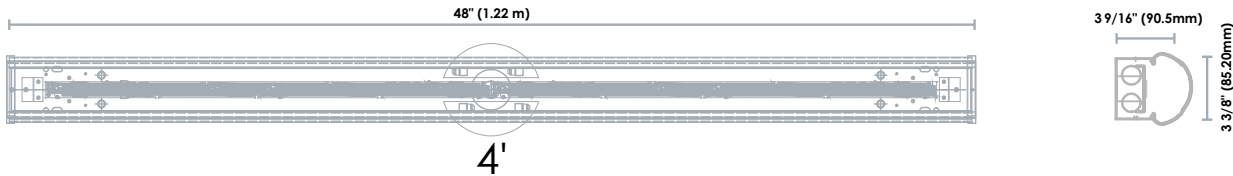




LED Shoplight



STANDARD's 4 foot LED Shoplight consumes at least 48 % less energy than it's traditional counterpart. It is equipped with a 5 foot cable with a direct plug-in and an ON/OFF pull chain.

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Traditional equivalent (W) Fluo	Case qty (master)
65971	LSHOP/S2/40W/40K/120/ND/STD	40	120	4 000	4 000	80	54 000	2x32 W T8	4

90

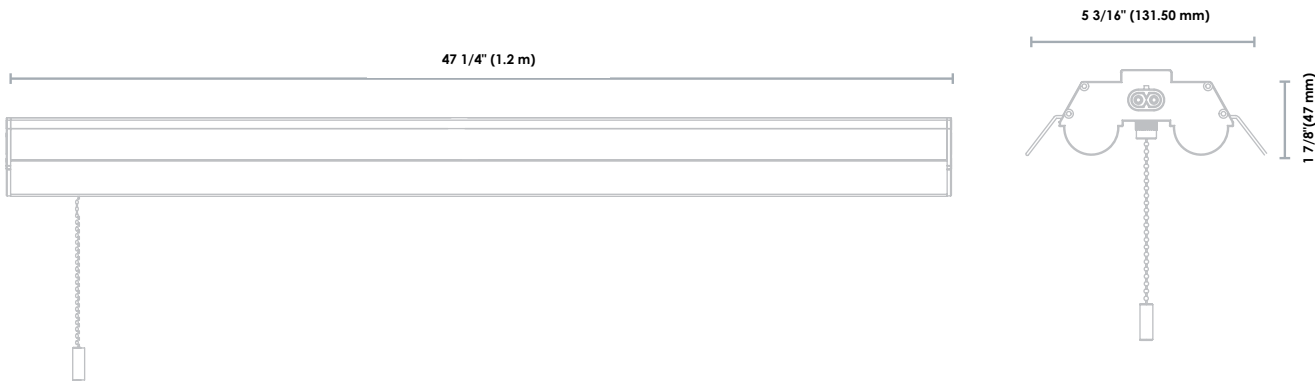

Lumen values are derived from photometric testing
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit www.standardpro.com




LED Vapor tight



The LSV Vapor Tight series is an enclosed luminaire that combines state-of-the-art LED technology with an IP rated vapor tight housing. This luminaire is protected against extreme temperatures, the intrusion of dust and jets of waters projected from any direction. Its durable construction provides protection against harsh environmental conditions and corrosion.

- Impact resistant polycarbonate construction
- Integrated durable gasket that seals the entire enclosure
- UV stabilized lens

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 ¹ (hrs)	Case qty (master)
65056	LSV/S2/40W/40K/2/DD1/FP/STD	40	120-277	4 000	5 200	82	80 000	6
65057	LSV/S2/40W/40K/3/DD1/FP/STD	40	347	4 000	5 200	82	80 000	6
65058	LSV/S2/60W/40K/2/DD1/FP/STD	60	120-277	4 000	7 800	82	80 000	6
Narrow								
66196	LSV/N/35W/40K/120-277/DD1/FP/A1/STD	35	120-277	4 000	4 550	80	50 000	4
66197	LSV/N/40W/40K/120-277/DD1/FP/A1/STD	40	120-277	4 000	5 200	80	50 000	4
66198	LSV/N/35W/40K/347/DD1/FP/A1/STD	35	347	4 000	4 550	80	50 000	4
66199	LSV/N/52W/40K/347/DD1/FP/A1/STD	52	347	4 000	6 760	80	50 000	4

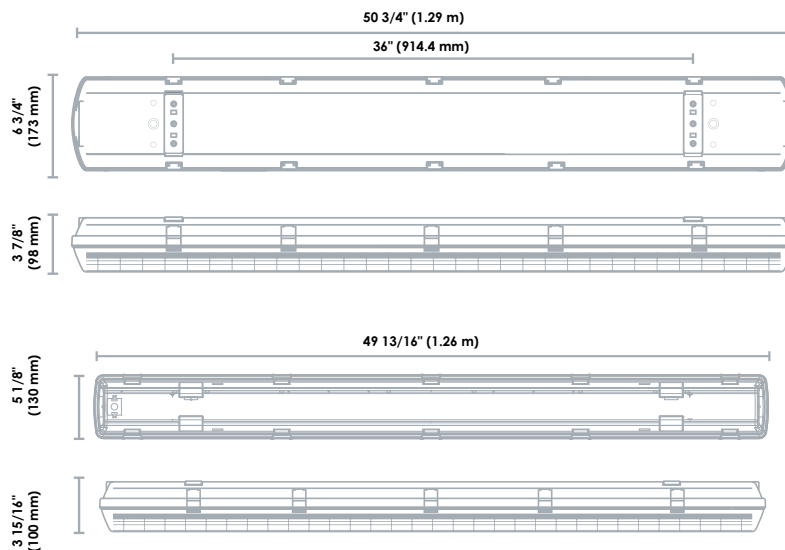

Narrow

Accessory

Order code	Description	Type	Compatible with
64187	FPV/LSV/STAINLESS/STEEL/CLIPS/STD	Steel clip	65056, 65057, 65058



DIMMABLE



RATING



OUTDOOR



WET



WARRANTY




Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and DLC qualified products,
please visit www.standardpro.com
¹Estimated life hours



LED Wrap

90

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 ¹ (hrs)	Case qty (master)
66174	LSW/4FT/34W/40K/120-277/A1/STD	34	120-277	4 000	4 420	80	50 000	4

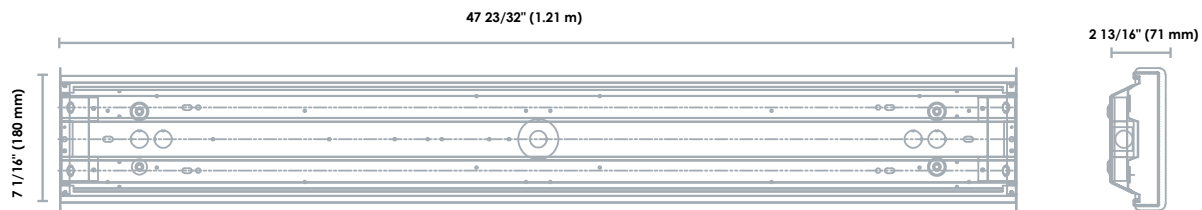

Lumen values are derived from photometric testing.
For a complete list of compatible dimmers and DLC qualified products,
please visit www.standardpro.com
¹Estimated life hours



INDOOR



DAMP



6 YEARS WARRANTY





LED Tri-proof

The LSVS Tri-Proof series is highly resistant to heavy impacts (IK10), water jets (IP66), dust, and temperature variations. This luminaire balances high performance lighting while providing minimum glare.



Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 ¹ (hrs)	Case qty (master)
2'								
64922	LSVS/20W/2FT/40K/2/ND/FP/L/STD	20	120-277	4 000	1 900	80	63 000	6
4'								
64923	LSVS/40W/4FT/40K/2/ND/FP/L/STD	40	120-277	4 000	3 800	80	63 000	6
64924	LSVS/40W/4FT/40K/3/ND/FP/L/STD	40	347	4 000	3 800	80	63 000	6

2 1/2" (63 mm)



23 5/8" (600 mm)



3 1/4" (83 mm)

2'

2 1/2" (63 mm)



47 1/4" (1.2 m)



3 1/4" (83 mm)

4'

Accessory

Order code	Description	Type
64175	LSVS/ACC/AIRCAB/STD	Steel cables




Included in the box

Connectors for linkable mounting

Mounting clips: one set per luminaire

One 6 ft (183 cm) cable, with one set of connectors at each end



NON-DIMMABLE



RATING



OUTDOOR



WET



PRORATED WARRANTY



Lumen values are derived from photometric testing
For a complete list of compatible dimmers and DLC qualified products,
please visit www.standardpro.com
¹Estimated life hours