

Technical Information Bulletin

LED Ceiling Luminaire



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 66712
 Description: CL11/S2/15W/40K/RND/WH/STD
 UPC: 69549667129
 Case quantity: 1
 Luminaire description: 11" Ceiling Luminaire



FEATURES, SPECIFICATIONS AND PERFORMANCE

Watts (W): 15
 Colour temp. (K): 4 000
 CRI: 80
 Average life (hrs): 50 000
 Lumens (lm): 1 164
 Efficacy (LPW): 78
 Volts (V): 120
 Frequency (Hz): 60
 Power factor: >0.90
 Total harmonic distortion (THD): <20%
 Ambient operating temperatures: - 20 °C to 40 °C (- 4 °F to 104 °F)
 Lens type: Frosted Polycarbonate
 Mounting: Junction box
 Dimmer type: TRIAC dimmers / Forward phase



For a complete list of ENERGY STAR qualified products, please visit www.standardpro.com

COMPATIBLE DIMMERS

Legrand: HCL453P
Cooper : AAL06
Leviton : SLC03P, 6615, IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ
Lutron: DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVELV-300P, SELV-300P, MACL-153P, PD-6WCL

DESCRIPTION AND OTHER OPTIONS

CL11	/	S2	/	15W	/	40K	/	RND	/	WH	/	STD
Type		Series		Watts		Colour Temperature		Shape		Colour		Brand
CL6		BLANK	Series 1	10 W		27K ¹	2 700 K	RND	Round	WH	White	STD
CL8		S2	Series 2	12 W		30K	3 000 K			BN ²	Brushed Nickel	
CL11				15 W		40K	4 000 K					
CL14				25 W								

¹ Offered in 11" & 14" only
² Available in 6" & 8" only
 This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
 March 29, 2018

Technical Information Bulletin


LED Ceiling Luminaire



ORDER CODE : 66712



TECHNICAL DRAWINGS AND DIMENSIONS

Diameter: 11" (279.4 mm)
 Height: 3 3/8" (85.73 mm)

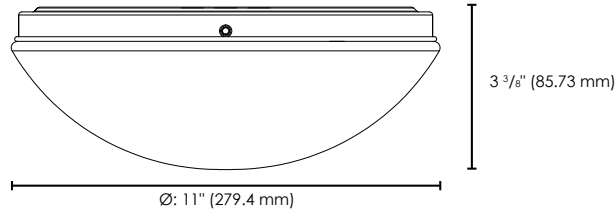

BEAM SPREAD*

CANDELA DISTRIBUTION*

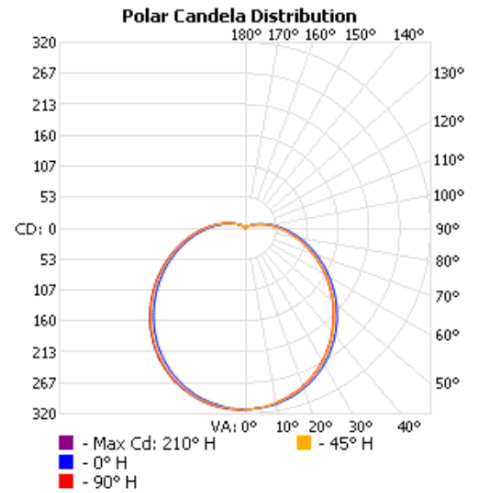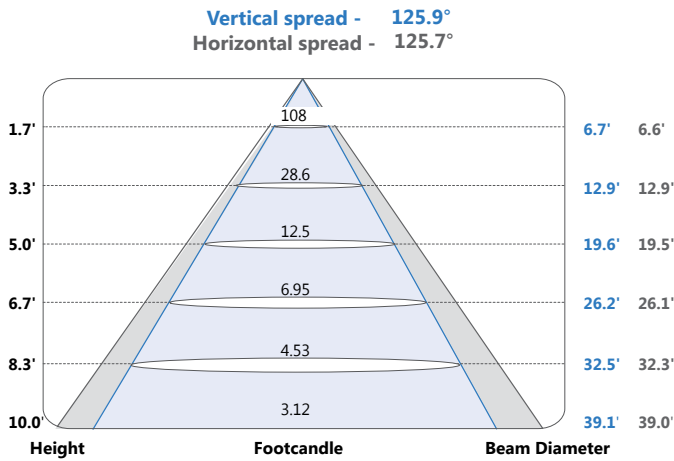

COEFFICIENTS OF UTILIZATION (ZONAL CAVITY METHOD)*

RCC %:	80				70				50			30			10			0
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.17	1.17	1.17	1.17	1.13	1.13	1.13	.90	1.06	1.06	1.06	.99	.99	.99	.93	.93	.93	.90
1	1.04	.98	.92	.88	1.00	.94	.90	.71	.88	.84	.81	.83	.79	.77	.77	.75	.72	.70
2	.93	.84	.76	.69	.90	.81	.74	.57	.76	.70	.65	.71	.66	.62	.66	.62	.59	.56
3	.85	.73	.64	.57	.81	.70	.62	.48	.66	.59	.53	.62	.56	.51	.58	.53	.49	.46
4	.77	.64	.55	.47	.74	.62	.53	.41	.58	.51	.45	.55	.48	.43	.51	.46	.41	.39
5	.71	.57	.47	.40	.68	.55	.46	.35	.52	.44	.38	.49	.42	.37	.46	.40	.36	.33
6	.65	.51	.42	.35	.62	.50	.41	.31	.47	.39	.33	.44	.37	.32	.42	.36	.31	.29
7	.60	.46	.37	.31	.58	.45	.36	.27	.42	.35	.29	.40	.33	.28	.38	.32	.27	.25
8	.56	.42	.33	.27	.54	.41	.33	.24	.39	.31	.26	.37	.30	.25	.35	.29	.24	.22
9	.52	.38	.30	.24	.50	.37	.29	.22	.36	.28	.23	.34	.27	.23	.32	.26	.22	.20
10	.49	.35	.27	.22	.47	.35	.27	.20	.33	.26	.21	.31	.25	.21	.30	.24	.20	.18

*Complete IES files available on our website

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____