



NEW PRODUCTS

LED Undercabinet

STANDARD[®]

LED Puck Light - Line Voltage (120 V)



LED Puck Light - Low Voltage (12 V)



LED FLUO - Line Voltage (120 V)



LED Swivel - Line Voltage (120 V)



LED Puck Light Line Voltage (120 V)

There is need for an LED driver with the line voltage models, as they can be used directly with the 120 V power cord plug for a quick and simple installation. They can also be installed with the hardwire box for direct connections. The option of surface mounting or recessed installation also adds to the versatility of these LED puck lights.


- Up to 20 LED puck lights can be installed in a row
- Sturdy aluminum housing to better dissipate the heat
- Gimbal feature to reduce glare and direct the light where needed
- Smooth dimming



Order code	Description	Watts per LED puck (W)	Volts (VAC)	Colour temp. (K)	Lumen output per LED puck (lm)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Case qty (master)
LED Puck Light - 1 Wire											
67101	UCP/1WIRE/120V/4W/30K/FR/WH/STD	4	120	3 000	200	90	36 000	120	White	Frosted	50
67104	UCP/1WIRE/120V/4W/30K/FR/BN/STD	4	120	3 000	200	90	36 000	120	Brushed nickel	Frosted	50
LED Puck Light - 2 Wires											
67100	UCP/2WIRES/120V/4W/30K/FR/WH/STD	4	120	3 000	200	90	36 000	120	White	Frosted	50
67103	UCP/2WIRES/120V/4W/30K/FR/BN/STD	4	120	3 000	200	90	36 000	120	Brushed nickel	Frosted	50
LED Puck Light - Kits of 3 units											
67102	UCP/KIT3/120V/4W/30K/FR/WH/STD	4	120	3 000	200	90	36 000	120	White	Frosted	20
67105	UCP/KIT3/120V/4W/30K/FR/BN/STD	4	120	3 000	200	90	36 000	120	Brushed nickel	Frosted	20

Accessories

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67106	UCP/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67107	UCP/HARDWIREBOX/120V/STD	Hardwire Box	B	N/A	50
67108	UCP/JUMPER/12IN/STD	12" Jumper	C	12 (304)	500
67109	UCP/JUMPER/36IN/STD	36" Jumper	C	36 (914)	500
67110	UCP/JUMPER/72IN/STD	72" Jumper	C	72 (1 828)	250



Included in the box (kits of 3 units)

- 1 Wire LED Puck - 1 unit
- 2 Wires LED Puck - 2 units
- 120 V Power Cord Plug - 1 unit



Lumen values are derived from photometric testing.
For a complete list of compatible dimmers, please visit www.standardpro.com

LED Puck Light

Low Voltage (12 V)

STANDARD's low voltage LED puck line has a sleek and modern look, with the slimmest profile on the market. Its magnetic design also allows to change the trim finish and the backplate to create a whole new look!


- Recessed and surface mount installation
- Sleek 7 mm profile
- Smooth dimming



Order code	Description	Watts per puck (W)	Volts (VDC)	Colour temp. (K)	Lumen output per puck (lm)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Case qty (master)
LED Puck Light											
67168	UCP/12V/2.2W/30K/FR/WH/STD	2.2	12	3 000	150	90	50 000	120	White	Frosted	200
67170	UCP/12V/2.2W/40K/FR/WH/STD	2.2	12	4 000	150	90	50 000	120	White	Frosted	200
67172	UCP/12V/2.2W/30K/FR/BLK/STD	2.2	12	3 000	150	90	50 000	120	Black	Frosted	200
67174	UCP/12V/2.2W/40K/FR/BLK/STD	2.2	12	4 000	150	90	50 000	120	Black	Frosted	200
67176	UCP/12V/2.2W/30K/FR/BN/STD	2.2	12	3 000	150	90	50 000	120	Brushed nickel	Frosted	200
67178	UCP/12V/2.2W/40K/FR/BN/STD	2.2	12	4 000	150	90	50 000	120	Brushed nickel	Frosted	200
LED Puck Light - Kits of 3 units											
67169	UCP/KIT3/12V/2.2W/30K/FR/WH/STD	2.2	12	3 000	150	90	50 000	120	White	Frosted	30
67171	UCP/KIT3/12V/2.2W/40K/FR/WH/STD	2.2	12	4 000	150	90	50 000	120	White	Frosted	30
67173	UCP/KIT3/12V/2.2W/30K/FR/BLK/STD	2.2	12	3 000	150	90	50 000	120	Black	Frosted	30
67175	UCP/KIT3/12V/2.2W/40K/FR/BLK/STD	2.2	12	4 000	150	90	50 000	120	Black	Frosted	30
67177	UCP/KIT3/12V/2.2W/30K/FR/BN/STD	2.2	12	3 000	150	90	50 000	120	Brushed nickel	Frosted	30
67179	UCP/KIT3/12V/2.2W/40K/FR/BN/STD	2.2	12	4 000	150	90	50 000	120	Brushed nickel	Frosted	30

Accessories

Order code	Description	Type	Figure	Case qty (inner/master)
67180	UCP/TRIM/BACKPLATE/WH/STD	White Trim and Backplate	A	50 / 200
67181	UCP/TRIM/BACKPLATE/BLK/STD	Black Trim and Backplate	B	50 / 200
67182	UCP/TRIM/BACKPLATE/BN/STD	Brushed nickel Trim and Backplate	C	50 / 200
67183	UCP/ACC/HUB6/STD	Hub for 6 LED Puck Lights	D	50 / 120
67185	UCP/ACC/DIMMER/STD	Dimmer Switch	E	50 / 120
67186	UCP/ACC/MOTIONSENSOR/STD	Motion Sensor	F	50 / 120

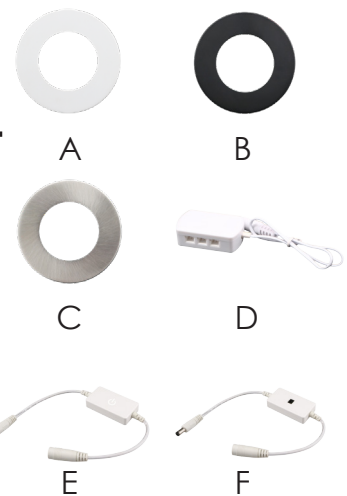

Included in the box (kits of 3 units)

LED Puck Lights - 3 units

12 V Plug-in LED Driver (12 W) - 1 unit



LED Puck Light Kit - Bare Wires

- An economic LED puck light solution
- The bare wires allow you to run the desired wire length between each puck
- Recessed installation only
- Smooth dimming



Order code	Description	Watts per puck (W)	Volts (VAC)	Colour temp. (K)	Lumen output per puck (lm)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Case qty (master)
67187	UCP/WIRES/12V/2W/30K/FR/WH/STD	2	12	3 000	120	90	50 000	120	White	Frosted	240

LED Driver (12 V)

Order code	Description	Output power (W)	Input voltage (VAC)	Output voltage (VDC)	Input current (mA)	Frequency (Hz)	Power factor	Finish	Case qty (master)
------------	-------------	------------------	---------------------	----------------------	--------------------	----------------	--------------	--------	-------------------

Plug-in - Non-Dimmable

67184	LED/DRIVER/12W/12V/PLUG/ND/STD	12	100-240	12	1 000	50/60	0.50	White	80
62265	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	36	100-240	12	1 500	50/60	0.80	White	100

Hardwired - Dimmable


65740	LED/DRIVER/50W/12V/HW/D/STD	50	100-130	12	410	50/60	0.95	White	20
-------	-----------------------------	----	---------	----	-----	-------	------	-------	----

Hardwired - Non-Dimmable

65743	LED/DRIVER/10W/12V/HW/ND/STD	10	100-240	12	220	50/60	0.50	White	100
65744	LED/DRIVER/20W/12V/HW/ND/STD	20	100-240	12	250	50/60	0.90	White	100
65745	LED/DRIVER/60W/12V/HW/ND/VS/STD	60	100-240	12	1 100	50/60	0.50	White	30
65746	LED/DRIVER/60W/12V/HW/ND/STD	60	90-264	12	1 400	47/63	0.93	White	10

DUOLED LED Hardwired Driver (12 V) and Dimmer Switch

- Converts line voltage (120 VAC) into low voltage (12 VDC)
- Eliminates compatibility issues between the driver and the dimmer
- Provides excellent dimming performance (1% - 100% dimming)



Order code	Description	Output power (W)	Input voltage (VAC)	Output voltage (VDC)	Input current (mA)	Life (hrs)	Frequency (Hz)	Power factor	Face plate finish	Case qty (master)
67071 ¹	DRIVER-DIMMER/12V/60W/WH/STD	60	120	12	1 000	50 000	60	0.9	Glossy white	25

Trim Plate

Order code	Description	Finish	Case qty (master)
67073	DRIVER-DIMMER/TRIM/WH/STD	Glossy white	100



Lumen values are derived from photometric testing.
For a complete list of compatible dimmers, please visit www.standardpro.com

LED FLUO

STANDARD's LED FLUO is designed for 120 V applications and is easy and quick to install as no driver is required. With its seamless look, the LED FLUO is the ideal replacement for traditional fluorescent undercabinet or task lighting for either residential and commercial applications.


- ON/OFF switch directly on each LED FLUO bar
- Up to 300 W can be daisy chained
- For an installation without interruption, use the end to end connector
- The 120 V power cord and the hardwire box can be used to make connections to the main power
- 5 different lengths available
- Smooth dimming



Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Case qty (master)
12"											
67251	UCFL/12IN/120V/5W/30K/FR/WH/STD	5	120	3 000	400	90	50 000	120	White	Frosted	20
67252	UCFL/12IN/120V/5W/40K/FR/WH/STD	5	120	4 000	400	90	50 000	120	White	Frosted	20
24"											
67253	UCFL/24IN/120V/10W/30K/FR/WH/STD	10	120	3 000	850	90	50 000	120	White	Frosted	20
67254	UCFL/24IN/120V/10W/40K/FR/WH/STD	10	120	4 000	850	90	50 000	120	White	Frosted	20
36"											
67255	UCFL/36IN/120V/15W/30K/FR/WH/STD	15	120	3 000	1 300	90	50 000	120	White	Frosted	20
67256	UCFL/36IN/120V/15W/40K/FR/WH/STD	15	120	4 000	1 300	90	50 000	120	White	Frosted	20
48"											
67257	UCFL/48IN/120V/20W/30K/FR/WH/STD	20	120	3 000	1 700	90	50 000	120	White	Frosted	20
67258	UCFL/48IN/120V/20W/40K/FR/WH/STD	20	120	4 000	1 700	90	50 000	120	White	Frosted	20
60"											
67259	UCFL/60IN/120V/25W/30K/FR/WH/STD	25	120	3 000	2 000	90	50 000	120	White	Frosted	20
67260	UCFL/60IN/120V/25W/40K/FR/WH/STD	25	120	4 000	2 000	90	50 000	120	White	Frosted	20

Accessories

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67261	UCFL/HARDWIREBOX/120V/STD	120 V Hardwire Box	B	N/A	50
67203	UCS/JUMPER/6IN/STD	6" Jumper	C	6 (152.5)	500
67204	UCS/JUMPER/24IN/STD	24" Jumper	C	24 (610)	250
67205	UCS/JUMPER/36IN/STD	36" Jumper	C	36 (914)	100



LED Swivel

The LED Swivel is the perfect solution to replace traditional Xenon undercabinet luminaires. Working directly off of line voltage, no LED driver is required and hardwired connections can be made directly inside the luminaire. For a quick and easy installation, use the 120V power cord plug to make the connection to the power outlet.

The LED Swivel also offers the option to swivel the module and direct the light where desired, depending on the needs of the application. The selectable colour temperature feature enables to set the light to the right mood or activity; whether you need a warm and cozy atmosphere or a cooler task lighting.

- Selectable colour temperature switch - 2 700 K / 3 000 K / 4 000 K
- For an installation without interruption, use the end to end connector
- Up to 300 W can be in daisy chained
- 4 different lengths available
- Smooth dimming



Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Traditionnal equivalent (W)	Case qty (master)
12"												
67194	UCS/12IN/120V/5W/SEL/FR/WH/STD	5	120	2 700/3 000/4 000	330	90	50 000	120	White	Frosted	50	10
18"												
67195	UCS/18IN/120V/8W/SEL/FR/WH/STD	8	120	2 700/3 000/4 000	530	90	50 000	120	White	Frosted	80	10
24"												
67196	UCS/24IN/120V/12W/SEL/FR/WH/STD	12	120	2 700/3 000/4 000	800	90	50 000	120	White	Frosted	120	10
32"												
67197	UCS/32IN/120V/16W/SEL/FR/WH/STD	16	120	2 700/3 000/4 000	1 060	90	50 000	120	White	Frosted	160	10

Accessories

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67203	UCS/JUMPER/6IN/STD	6" Jumper	B	6 (152.5)	500
67204	UCS/JUMPER/24IN/STD	24" Jumper	B	24 (610)	250
67205	UCS/JUMPER/36IN/STD	36" Jumper	B	36 (914)	100



A



B



SELECTABLE



DIMMABLE



DRY



5 YEARS WARRANTY



ETL Intertek



Standard
Products



Standard
Products Inc



StandardProInc



Standard
Products Inc

Order code: 67617
www.standardpro.com



Printed in Canada. © 2019 STANDARD Products Inc. All Rights Reserved.
Subject to change without notice. For the latest version, please refer to our website.
Rev. December 14, 2018

STANDARD[®]