



LED FLUO


STANDARD's LED FLUO is designed for 120 V applications and is easy and quick to install as no driver is required. With its seamless look, the LED FLUO is the ideal replacement for traditional fluorescent undercabinet or task lighting for either residential and commercial applications.

- ON/OFF switch directly on each LED FLUO bar
- Up to 300 W can be daisy chained
- For an installation without interruption, use the end to end connector
- The 120 V power cord and the hardwire box can be used to make connections to the main power
- 5 different lengths available
- Smooth dimming




Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Case qty (master)
12"											
67251	UCFL/12IN/120V/5W/30K/FR/WH/STD	5	120	3 000	400	90	50 000	120	White	Frosted	20
67252	UCFL/12IN/120V/5W/40K/FR/WH/STD	5	120	4 000	400	90	50 000	120	White	Frosted	20
24"											
67253	UCFL/24IN/120V/10W/30K/FR/WH/STD	10	120	3 000	850	90	50 000	120	White	Frosted	20
67254	UCFL/24IN/120V/10W/40K/FR/WH/STD	10	120	4 000	850	90	50 000	120	White	Frosted	20
36"											
67255	UCFL/36IN/120V/15W/30K/FR/WH/STD	15	120	3 000	1 300	90	50 000	120	White	Frosted	20
67256	UCFL/36IN/120V/15W/40K/FR/WH/STD	15	120	4 000	1 300	90	50 000	120	White	Frosted	20
48"											
67257	UCFL/48IN/120V/20W/30K/FR/WH/STD	20	120	3 000	1 700	90	50 000	120	White	Frosted	20
67258	UCFL/48IN/120V/20W/40K/FR/WH/STD	20	120	4 000	1 700	90	50 000	120	White	Frosted	20
60"											
67259	UCFL/60IN/120V/25W/30K/FR/WH/STD	25	120	3 000	2 000	90	50 000	120	White	Frosted	20
67260	UCFL/60IN/120V/25W/40K/FR/WH/STD	25	120	4 000	2 000	90	50 000	120	White	Frosted	20

12" (305 mm)
24" (610 mm)
36" (915 mm)
48" (1220 mm)
60" (1524 mm)

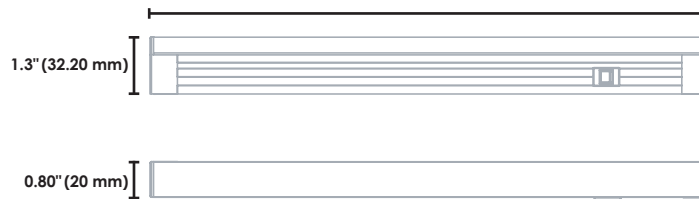

Accessories

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67261	UCFL/HARDWIREBOX/120V/STD	120 V Hardwire Box	B	N/A	50
67203	UCS/JUMPER/6IN/STD	6" Jumper	C	6 (152.5)	500
67204	UCS/JUMPER/24IN/STD	24" Jumper	C	24 (610)	250
67205	UCS/JUMPER/36IN/STD	36" Jumper	C	36 (914)	100

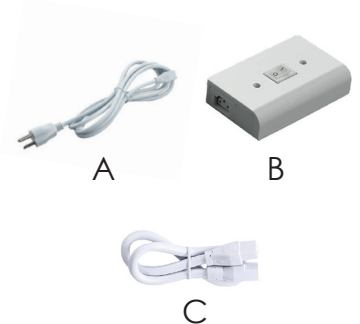

Intertek