Technical Information Bulletin



LED Tapes -

Date:	Name of distributor:	
In hands date of project:	Client #:	
Project name/Number:	Name of end user:	

ORDERING INFORMATION

Order code: 67634 (Special sourcing)

Description: TAPE/164'/4W/27K/120V/IP65/72/16MM/STD

UPC: 69549676343 **Case quantity:** 1 tape reel

FEATURES AND SPECIFICATIONS

Reel Total Length: 164.0 ft (50m)

Jacketed or Unjacketed: Jacketed with PVC coating

Wire gauge: 18 AWG

Number of LEDs: 72 LEDs per meter / 21 LEDs per foot
Cuttable length: 12 in. (305 mm) or every 21 LED chips

Maximum run length: 164 ft (50m)

PERFORMANCE DATA

Watts (W) per length: 660 W per reel / 13.2 W per meter / 0.34 W per inch

Volts (VAC): 120 Colour temp. (K): 2 700

Lumen output (lm): 57 400 lm per reel / 1 148 lm per meter / 29 lm per inch

 Lumen per Watts (Im/W):
 87

 CRI:
 90+

 Life (L70):
 50 000

 Beam angle (°):
 120

 Environment:
 Wet

 IP rating:
 IP65

Operating temp. range: -20°C to 40°C (-4°F to 104°F)

















COMPATIBLE DIMMERS

LEGRAND	RH703PTUTC
LEVITON	DDMX1
LUTRON	DVRP-253P, RRD-6NA, SELV-300P

COMPATIBLE ACCESSORIES¹

Order code	Description	Туре
67641	TAPE/HARDWIREKIT/120V/STD	Hardwire Kit
67642	TAPE/PLUG/120V/STD	120 V Power Cord
67645 ²	TAPE/BRACKETS/120V/STD 10P	Fixing Clips
67643	TAPE/ELECTBOXCOVER/RECT/120V/STD	Electrical box cover plate - Rectangular
67644	TAPE/ELECTBOXCOVER/RND/120V/STD	Electrical box cover plate - Round

¹ All accessories sold separately.

DESCRIPTION AND OTHER OPTIONS

TAPE	/ 164' /	4W /	27K	/ 120V	/ IP65 /	72	/ 16MM /	STD STD
Family	Length	Watts per Feet	Colour Temperature	Volts	IP Rating	LED Chips per meter	Tape Width	Brand
TAPE LED Tape	32.8 ' 32.8 FT (10 M) 98.4 ' 98.4 FT (30 M) 164 ' 164 FT (50 M)	4W 4 watts	27K 2 700 K 30K 3 000 K 40K 4 000 K	120V 120 volts	IP65	72	16MM	STD STANDARD

 $^{^{\}mathrm{2}}$ It is recommended to put a fixing clip every 6 inches to ensure secure installation.


Technical Information Bulletin



LED Tapes.

ORDER CODE: 67634 (Special sourcing)

TECHNICAL DRAWINGS AND DIMENSIONS

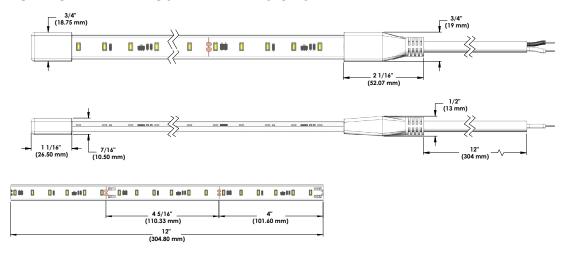

ADDITIONAL INFORMATION

- 120 VAC input only.
- Do not exceed the maximum number of extensions or flexible light lengths of 164 feet permitted by the manufacturer.
- Secure this flexible light using only the clips offered in this line. Do not secure this product or its cord with staples, nails, or like means that may damage the insulation or permanently attach to the building structure.
- Do not subject flexible lighting to continuous flexing.
- PVC coating on LED tape is not suitable for direct sunlight exposure.

Qty	Description	Price	
I accept the specificatio	ns of the luminaire configuration mentioned above.		
Name:			
Company:		-	
Signature:		Date:	