



## LED LPDL™

Choice LED LPDL (Low Profile Downlight) is a simple and economical solution for any downlight application where an even light is needed.

This luminaire gives you all the flexibility you need during installation, especially in confined areas or when facing constraints such as wood beams, ceiling joist or air ducts.


The driver is mounted separately from the light source which allows the luminaire profile to be less than 1" thick!



6"

Order code	Description	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen output (lm)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Traditional equivalent (W)	Case qty (master)
67702	LPDL6/RND/12W/30K/WH/CHOICE/STD	12	120	3 000	750	>80	50 000	120	White aluminum	65	24

6" Round

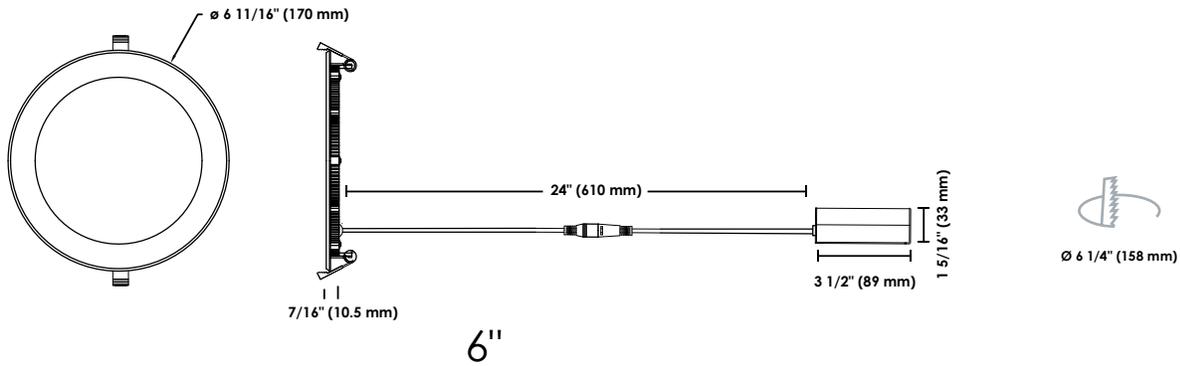

6"

Accessories

Order Code	Description	Opening diameter (in.)	Type	Case qty (master)
66822	ACC/MPLATE/6.25IN/HANG.BARS/STD	6 1/4	Mounting plate with hanger bars	25
64263	ACC/MPLATE/6.25IN/SQR/STD	6 1/4	Square mounting plate	96
64921	ACC/MPLATE/6.25IN/ADJ/STD	6 1/4	Adjustable mounting plate	24
66144	ACC/6/VAPOR BARRIER/STD	6 7/32	Vapor barrier extender	50
64264	LPDL/ACC/6FT/EXTCABLE/STD	-	6' extension cord	96



Lumen values are derived from photometric testing. For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)

