

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

LED LINEAR

T5 BALLAST BYPASS

ORDERING INFORMATION

Order code: 69148
Model number: T5/25W/840/46/BYP/120-347/ND/STD
UPC: 069549024892
Case quantity: 25
DLC unique ID: S-UJGW6R

PHYSICAL DATA

Shape: T5
Base: G5
Length in. (mm): 46" (1 168 mm)
Material: Glass

PERFORMANCE DATA


Watts (W): 25
Volts (V AC): 120-347
Color temperature (K): 4 000
Lumen output (lm): 3 500
Efficacy (lm/W): 140
CRI: 83
Life L70 (h): 50 000
Power factor: >0.9
Installation method: Ballast bypass
Operating temp. range: -25°C/-13°F to 45°C/ 113°F

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

DIMENSIONS

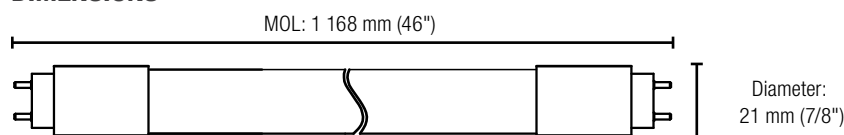

NOTES

- This lighting equipment meets requirements of ICES-005 issue 5 class A for use in commercial applications.
- Data is based upon tests performed in a controlled environment.
- Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
- ONLY FOR BALLAST BYPASS INSTALLATION IN 120-347V APPLICATIONS.
- DIRECT REPLACEMENT FOR T5 54 W

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.