

Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# LED LINEAR

## T5 BALLAST BYPASS

### ORDERING INFORMATION

**Order code:** 69149  
**Model number:** T5/25W/850/46/BYP/120-347/ND/STD  
**UPC:** 069549024908  
**Case quantity:** 25  
**DLC unique ID:** S-B62VDQ

### PHYSICAL DATA

**Shape:** T5  
**Base:** G5  
**Length in. (mm):** 46" (1 168 mm)  
**Material:** Glass

### PERFORMANCE DATA


**Watts (W):** 25  
**Volts (V AC):** 120-347  
**Color temperature (K):** 5 000  
**Lumen output (lm):** 3 500  
**Efficacy (lm/W):** 140  
**CRI:** 83  
**Life L70 (h):** 50 000  
**Power factor:** >0.9  
**Installation method:** Ballast bypass  
**Operating temp. range:** -25°C/-13°F to 45°C/ 113°F

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### DIMENSIONS

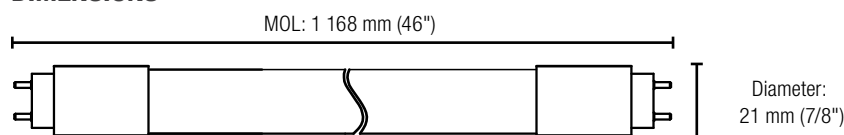

### NOTES

- This lighting equipment meets requirements of ICES-005 issue 5 class A for use in commercial applications.
- Data is based upon tests performed in a controlled environment.
- Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.
- ONLY FOR BALLAST BYPASS INSTALLATION IN 120-347V APPLICATIONS.
- DIRECT REPLACEMENT FOR T5 54 W

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications.  
 Data is based upon tests performed in a controlled environment.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).