

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

*Individual Spec Sheet*

# T3-R7S

## DIMMABLE AND HIGH LUMENS

### ORDERING INFORMATION

**Order code:** 69190  
**Model number:** R7S/S2/6W/30K/78/STD  
**UPC:** 069549025295  
**Case quantity:** 200

### PHYSICAL DATA

**Shape:** T3  
**Base:** R7S  
**Length in. (mm):** 3 1/8 (78)

### PERFORMANCE DATA

**Watts (W):** 6  
**Volts (V AC):** 120  
**Color temperature (K)<sup>1</sup>:** 3 000  
**Lumen output (lm)<sup>2</sup>:** 550  
**CRI:** 80+  
**Life L70 (h)<sup>3</sup>:** 15 000  
**Dimming:** Yes  
**Beam angle (°):** 360  
**Power factor:** 0.90  
**Frequency (Hz):** 60  
**Operating temp. range:** -20°C to 45°C (-4°F to 113°F)

<sup>1</sup> Typical color temperature range: +/- 5 %.  
<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.  
<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.


### COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
LUTRON	DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253-WH, SELV-300P, MACL-153P
COOPER	RRD-6NA-WH, AAL06, SAL06P3
LEVITON	066EV, IPL06, 6674, IPE04-1LZ
LEGRAND	RH703PTUTC

**DIMMING RANGE:** 10% - 100%  
<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.



**DIMENSIONS**

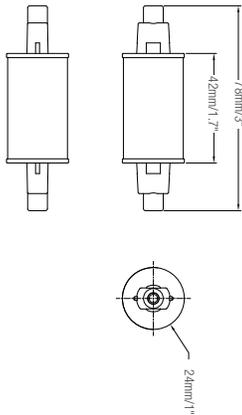

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

**Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.**