

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_

Date: \_\_\_\_\_

## Individual Spec Sheet

# A19

## GU24 LED LAMPS

### ORDERING INFORMATION

Order code: 69843  
 Model number: A19/S2/8W/40K/GU24/STD  
 UPC: 069549030626  
 Case quantity: 50

### PHYSICAL DATA

Base: GU24  
 Type: A19  
 Material: Lens: Plastic  
 Housing: Plastic & Aluminum

### PERFORMANCE DATA

Watts (W): 8  
 Traditional equivalent (W): 60  
 Volts (V AC): 120  
 Color temperature (K)<sup>1</sup>: 4 000  
 Lumen output (lm)<sup>2</sup>: 800  
 Efficacy (lm/W): 100  
 CRI: 80  
 Dimmable: Yes  
 Life L70 (h)<sup>3</sup>: 25 000  
 Beam Angle: 220  
 Power factor: ≥0.7  
 Frequency (Hz): 60  
 Input current (A): 100  
 Operating temp. range: - 30 °C / - 22 °F to 35 °C / 95 °F  
 Energy Star: No  
 Warranty: 3 Years  
 Applications: Indoor only


<sup>1</sup> Typical color temperature range: +/- 5 %.<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.<sup>3</sup> Life hours are derived from IESNA LM80 testing report and projected per IESNA TM-21 extrapolations.

### COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
LUTRON	PD-6WCL, DVCL-253P, AYCL-253P, MACL-153P, HCL453P, DVCL-153P
COOPER	DAL06P
LEVITON	IPL06, DSM10-1LZ, DDMX1, 6674, DSL06-1LZ
LEGRAND	RH730PTUTC

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

### DIMENSIONS

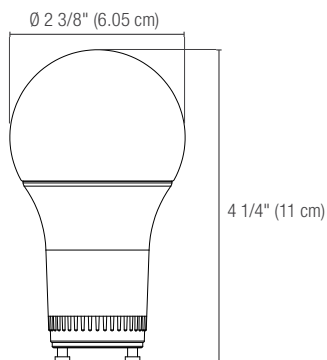

**3**<sup>yrs</sup>  
**warranty**

  
 dimmable

**6**  
 damp  
 location



ICES  
005



enclosed  
fixture

  
 LISTED





This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.