



Canada 2 Day Quick Ship

Quick Ship

Lighting Guide



Content

Introduction	3	Connected Wireless Lighting	6
Commitment	4	Interact Pro System Components	10
Definitions	80	Interact Ready Luminaries & Lamps	12
Brand Line Card	82	Office & Industrial Lighting	16
		High Bays	18
		Linear	21
		Vapourtite	25
		Recessed & Surface	27
		Indoor Track & Downlighting	34
		Downlights	36
		UniFrame Downlights	42
		LyteCaster Downlights	50
		LytePoints Downlights	57
		Track Lighting	60
		Commercial Outdoor Lighting	66
		Area & Canopy	68
		Floodlights	70
		Wallpacks	72
		Specialty	76
		Decorative Outdoor Lighting	78
		Low Voltage	79

View the latest
version online at
signify.com/quickship

Introduction

Introducing our latest Quick Ship guide (formerly known as Service Smart). This new guide has been revamped with an updated product mix that is designed to meet the day-to-day needs of your customers lighting projects.

All products listed are stocked and ready to ship in 2 days* from our Markham DC to ensure we can support your shelf-stocking requirements with reliable lead times. Choose from a wide variety of indoor or outdoor lighting solutions that deliver on performance, efficiency and budget.

We know that you face demanding timelines for your customers and our Quick Ship guide is your solution.

interact

PHILIPS

Day-Brite
CFI

LIGHTOLIER

KEENE

HADCO



* Service time is calculated from the time the order is entered until it is shipped, see page 4 for full details.

Commitment

Our delivery commitment is backed by a significant investment in finished goods and component inventory. If any unforeseen issues arise or if order volume exceeds maximum order quantity, we will do our best to meet your needs and confirm an acceptable ship date.

In case you have questions, please contact your sales representative or Customer Service.

Order Related Inquiries: **1-800-668-9008**

General Inquiries: **1-800-555-0050**

Terms and Conditions

Freight Terms: Individual order minimum of \$1,000;
Shipping and handling fee for orders less than \$1,000.

Visit www.signify.com/en-ca/support/warranties
for details on our standard terms and conditions.

Order Process

Lead time is from the time the order is entered and received by our warehouse. We are committed to entering orders within 24 hours of receipt.

To ensure your order is processed without delay, we recommend you verify you have the following:

- Correct Catalogue Numbers
- Price detail (Deal#, SPA reference)
- Tag "Quick Ship" on your order

Large Orders

To ensure we satisfy all our customers optimally within the committed lead times, maximum order quantities may apply. If the order exceeds the set threshold, Signify will contact you to work out a feasible schedule for your large order. It is always advised to work with your Signify representative to give advance notice of any foreseeable large orders.

Transportation timelines

Signify maintains stock levels of our luminaires at our warehouse in Markham, Ontario in order to provide our customers with quick access to the inventory you require. For your convenience we've included recommended pallet quantities to help plan your orders.*

You can calculate when to expect your shipment by adding the following transportation times to the day it leaves our warehouse.

Toronto / Ottawa / Montreal	+1 Day
Windsor	+2 Days
Sudbury / Quebec City	+3 Days
Manitoba / New-Brunswick	+4 Days
Saskatchewan / Nova Scotia / P.E.I.	+5 Days
Alberta	+6 Days
British Columbia / Newfoundland	+7 Days

* Actual pallet quantities may vary, please contact your Signify sales rep or customer service to arrange any special delivery requirements



interact Pro

Connected Wireless Lighting





Interact Pro is an intuitive app and portal that delivers the power of IoT connected lighting for up to 200 light points. This completely wireless system instantly connects to smart Interact Ready products, including Philips LED lamps, sensors, wall-switches and Luminaires by Signify. Data insights from light points can be leveraged for service contracts via alerts on light failures, and also allows users to optimize energy usage and create light schemes.

Application Areas

Ideal applications for the Interact Pro connected lighting system include:

- Tenant fit out offices
- Small to medium retail stores
- Municipal buildings
- Small industry (for example a small workshop or warehouse)
- Retail banks
- Schools
- Micro hospitals

Interact Pro can connect up to 200 light points per wireless gateway to the cloud. Multiple gateways can be used in one project when the number of light points exceeds 200, or in cases where the wireless signal cannot propagate due to building materials such as steel reinforced concrete.

Each gateway would be used to control a logical area such as a floor or discrete part of the building. Typically, one wireless gateway can cover an area of up to 11,000 ft² (1,000 m²) or larger. In buildings with lower lighting requirements, warehousing for example, up to 110,000 ft² (10,000 m²) may be connected.

Suggested System Architectures

	Explanation
Per System	Router (customer)
	1 Wireless Gateway
	200 light points (max)
	50 green power sensors / switches, of which 30 may be sensors
	64 groups / zones (max)
	128 scenes
	16 scedules
	Unlimited users
Per Group	16-25 light points (recommended) no limitation
	5 green power sensors and/or switches (max)
	16 scenes

System Components

The combination of hardware components and system specific firmware and software defines the Interact Pro system.

All key components are future proof, via regular firmware and software updates that are pushed over the air (OTA). This process ensures the stable and secure operation of the system and enables the addition of new features and functionality without requiring the customer to install new hardware.

View the [Interact Pro Design Guide](#) for full details.

For more information please visit www.interact-lighting.com/pro



Wireless Gateway

The basis of the lighting system connects the system to the cloud via an IT network connected to the internet. The wireless gateway connects with the light points through a ZigBee® mesh network.



Sensors

Senses the presence of people in an area with lighting and triggers the switching through ZigBee®. Daylight dependent regulation is possible with a multi-sensor that supports light sensing and occupancy detection.



**interact
ready.**

Light points

Interact Ready lamps or luminaires equipped to act as nodes within the Zigbee® mesh network. A full list of available Interact Ready products can be found at: interact-lighting.com/pro



Wireless Switch

This kinetic switch enables the manual control of the lighting in an area, for example switching on and off, dimming and scene selection wirelessly.



Portal

A cloud-based website for design, installation, commissioning, operation, or management. Access rights of the users determine feature visibility.



App

Software installed on a smart device that is used for commissioning and operation.

A modern office interior with glass partitions, desks, and chairs. The scene is bathed in a strong red light, creating a dramatic and futuristic atmosphere. The ceiling features exposed ductwork and linear lighting fixtures. The floor is a smooth, light-colored material. The overall design is clean and minimalist.

Interact Pro System Components



Gateway



Switch



Occupancy Sensor



Occupancy Multi Sensor

Catalogue Number	Description / Features	 	UPC	Pallet Qty.
Interact Pro Wireless Gateway				
LCN1840/05	Gateway (North America)	NLC	046677476335	20
Interact Pro Switch				
UID8451/10	On/Off/Dim Switch 2 button	NLC	046677455439	40
Interact Pro Sensors				
476184	OCC SENSOR IA CM IP42 WH 10/1	NLC	046677476182	40
476192	OCC MULTI SENSOR IA CM WH 10/1	NLC	046677476199	40

A modern office interior with glass partitions, desks, and chairs. The scene is bathed in a strong red light, likely from the luminaires mentioned in the text. The ceiling features exposed ductwork and linear lighting fixtures. The overall atmosphere is industrial and contemporary.

Interact Ready Luminaires & Lamps



FluxGrid



FluxPanel



FluxStream LED Strip



Catalogue Number	Description / Features		UPC	Pallet Qty.
FluxGrid LED		See 30 for full product family		
1FGG38L840-4-D-UNV-DIM-IAP	1×4', 3800lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197655501	39
2FGG38L840-2-D-UNV-DIM-IAP	2×4', 3800lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197655440	52
2FGG43L840-4-D-UNV-DIM-IAP	2×4', 4300lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197655457	26
FluxPanel LED		See 28 for full product family		
1FXP38L835-4-DS-UNV-DIM-IAP	1×4', 3800lm, 3500K (CRI 80), UNV, 0-10V Dimming	•	784197642211	50
1FXP38L840-4-DS-UNV-DIM-IAP	1×4', 3800lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197642280	50
2FXP38L835-2-DS-UNV-DIM-IAP	2×2', 3800lm, 3500K (CRI 80), UNV, 0-10V Dimming	•	784197642259	52
2FXP38L840-2-DS-UNV-DIM-IAP	2×2', 3800lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197642242	52
2FXP43L835-4-DS-UNV-DIM-IAP	2×4', 4300lm, 3500K (CRI 80), UNV, 0-10V Dimming	•	784197642228	40
2FXP43L840-4-DS-UNV-DIM-IAP	2×4', 4300lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197642235	40
FluxStream LED Strip		See 22 for full product family		
FSS440L840-UNV-DIM-IAP	4', 4000lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197651961	60
FSS880L840-UNV-DIM-IAP	8', 8000lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197655648	60



4RNIP / 6NIP



Master Connect



Catalogue Number	Description / Features		UPC	Pallet Qty.
UniFrame	Please see "UniFrame Downlights" on page 42 for full selection of compatible products			
4RNIP	4" Round, New Construction (Non-IC), UNV	•	190096017515	50
6RNIP	6" Round, New Construction (Non-IC), UNV	•	190096017553	50
Philips Master Connect	2' T8 LED Lamp			
537258	8T8/24-830/IF11/MAScon IA 10/1		046677537258	2380
537266	8T8/24-835/IF11/MAScon IA 10/1	•	046677537265	2380
537274	8T8/24-840/IF12/MAScon IA 10/1	•	046677537272	2380
537282	8T8/24-850/IF12/MAScon IA 10/1	•	046677537289	2380
	4' T8 LED Lamp			
537183	14T8/48-835/IF20/MAScon IA 10/1	•	046677537180	1120
537191	14T8/48-840/IF21/MAScon IA 10/1	•	046677537197	1120
537209	14T8/48-850/IF21/MAScon IA 10/1	•	046677537203	1120
	U-Bent T8 LED Lamp			
537225	15T8/24-835/IF20-6U/MAScon IA 10/1	•	046677537227	400
537233	15T8/24-840/IF21-6U/MAScon IA 10/1	•	046677537234	400
537241	15T8/24-850/IF21-6U/MAScon IA 10/1	•	046677537241	400

interact Pro

The simple way to connected lighting

This game-changing wireless connected lighting system works with Interact Ready light sources that instantly connect to the Interact Pro app and portal.

No extra cabling or IT support is required, so it's easy to install and commission jobs faster than ever before.

www.interact-lighting.com/pro



Day-Brite *CFI*

Office & Industrial Lighting





Day-Brite CFI is an industry leader in general purpose and performance lighting systems. With products ranging from high performance recessed ceiling troffers to industrial grade high bay luminaires, Day-Brite CFI's extensive portfolio offers the utmost in quality, performance and efficiency for a variety of applications.



High Bays



FBY



FCX



Catalogue Number	Description / Features		UPC	Pallet Qty.
FBY LED High Bay				
FBY18L40-UNV	18000lm, 4000K (CRI 80), UNV	PREMIUM	784197653118	50
FBY18L40-UNV-WC6	18000lm, 4000K (CRI 80), UNV, Wired 6' 16/3 cord	PREMIUM	784197665548	50
FBY24L40-UNV	24000lm, 4000K (CRI 80), UNV	PREMIUM	784197653101	50
FBY24L40-UNV-WC6	24000lm, 4000K (CRI 80), UNV, Wired 6' 16/3 cord	PREMIUM	784197665562	50
FBY24L40-347	24000lm, 4000K (CRI 80), 347V	PREMIUM	784197665555	50
Accessories				
HNH5-VHOOK	54" Chain with V Hook		784197658762	50
HCH5-VHOOK	5' Cables with V Hook		784197658724	50
FBY-PENHGR	Pendant Hanger		784197665036	50
FBY-WG	2' Wire Guard		784197665579	50
FCX LED High Bay				
FCX15L840-UNV-DIM	15000lm, 4000K (CRI 80), UNV	PREMIUM	784197631895	48
FCX15L840-347-DIM	15000lm, 4000K (CRI 80), 347V	PREMIUM	784197635015	48
FCX22L840-UNV-DIM	22000lm, 4000K (CRI 80), UNV	PREMIUM	784197631871	36
FCX22L840-347-DIM	22000lm, 4000K (CRI 80), 347V	PREMIUM	784197635008	36



APX



HCX



SHE

Catalogue Number	Description / Features	ENERGY STAR	DLC LISTED	UPC	Pallet Qty.
APX LED High bay					
APX24LL40-UNV	24000lm, 4000K (CRI 80), UNV		•	784197056520	50
HCX LED High Bay					
HCX15L840-UNV-DIM	Round, 15000lm, 4000K (CRI 80), UNV		•	784197631840	24
HCX15L840-347-DIM	Round, 15000lm, 4000K (CRI 80), 347V		•	784197634926	24
HCX22L840-UNV-DIM	Round, 22000lm, 4000K (CRI 80), UNV		•	784197631833	24
HCX22L840-347-DIM	Round, 22000lm, 4000K (CRI 80), 347V		•	784197634872	24
SHE Fluorescent High Bay					
SHE454HO-UNV-1/4EB-GENRS-CORD	T5HO 54W (4 lamps), UNV, 6' Cord (no plug)			773849349943	30
SHE454HO-347-1/4EB-GENRS-CORD	T5HO 54W (4 lamps), 347V, 6' Cord (no plug)			773849349950	30
SHE654HO-UNV-1/42EB-GENRS-CORD	T5HO 54W (6 lamps), UNV, 6' Cord (no plug)			773849349929	20
SHE654HO-347-1/42EB-GENRS-CORD	T5HO 54W (6 lamps), 347V, 6' Cord (no plug)			773849349936	20

Linear



FSSEZ



FSS

Catalogue Number	Description / Features	ENERGY STAR	DLC LISTED	UPC	Pallet Qty.
FluxStream LED Strip EZ					
FSSEZ440L835-UNV	4', 4000lm, 3500K (CRI 80), UNV, Non-Dimmable			784197269982	60
FSSEZ440L840-UNV-DIM	4', 4000lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197665593	60
FSSEZ440L840-UNV	4', 4000lm, 4000K (CRI 80), UNV, Non-Dimmable			784197245344	60
FSSEZ880L840-UNV	8', 8000lm, 4000K (CRI 80), UNV, Non-Dimmable			622252811052	50
FluxStream LED Strip					
FSS220L840-UNV-DIM	2', 2000lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197245351	80
FSS330L840-UNV-DIM	3', 3000lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197245375	60
FSS440L835-UNV-DIM	4', 4000lm, 3500K (CRI 80), UNV, 0-10V Dimming			784197270025	60
FSS440L840-347-DIM	4', 4000lm, 4000K (CRI 80), 347V, 0-10V Dimming			784197269869	70
FSS440L840-UNV-DIM	4', 4000lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197245382	60
FSS440L840-UNV-DIM-IAP	4', 4000lm, 4000K (CRI 80), UNV, 0-10V Dimming	interact ready.		784197651961	60
FSS455L840-UNV-DIM	4', 5500lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197245405	60
FSS470L840-UNV-DIM	4', 7000lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197245412	60
FSS8110L840-UNV-DIM	8', 11000lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197245436	60
FSS880L840-347-DIM	8', 8000lm, 4000K (CRI 80), 347V, 0-10V Dimming			784197269906	60
FSS880L840-UNV-DIM	8', 8000lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197245429	60
FSS880L840-UNV-DIM-IAP	8', 8000lm, 4000K (CRI 80), UNV, 0-10V Dimming	interact ready.		784197655648	60



FSI



SCD



Catalogue Number	Description / Features		UPC	Pallet Qty.
FluxStream LED Industrial				
FSI440L840-UNV-DIM	4', 4000lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197245542	40
FSI880L840-UNV-DIM	8', 8000lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	784197245580	36
FluxStream Accessories				
FSSWG4	4' Wire guard (order two for 8' models)		784197295028	70
FSTH	Sliding Hanger Bracket (Pair)		078197349707	50
SCD Wide Strip LED				
SCD220L840-UNV	2', 2000lm, 4000K (CRI 80), UNV, Non-dimmable	•	190096130146	120
SCD428L840-UNV	4', 2800lm, 4000K (CRI 80), UNV, Non-dimmable	•	190096130160	60
SCD450L840-UNV	4', 5000lm, 4000K (CRI 80), UNV, Non-dimmable	•	190096130177	60



N Series



T Series



Catalogue Number	Description / Features	UPC	Pallet Qty.
N Series Narrow T8 Strip			
N132-UNV-1/1-EB	4', 1 Lamp, T8 32W, Electronic Ballast, UNV	734340776195	216
CGS-4	N Strip 4' Wire Guard	782343296103	150
T Series T8 Strip			
T232-347-1/2-EB	4', 2 Lamp, T8 32W, Electronic Ballast, 347V	734340965681	56
T232-UNV-1/2-EB	4', 2 Lamp, T8 32W, Electronic Ballast, UNV	734340608328	56
TT232-347-1/4-EB	8', 4 Lamp, T8 32W, Electronic Ballast, 347V	734340965674	56
TT232-UNV-1/4-EB	8', 4 Lamp, T8 32W, Electronic Ballast, UNV	734340608342	56
Accessories			
CG-4	T Strip 4' Wire Guard	782343296059	288
FKR-126	Chain hanger set (pair)	782343184103	200
TIA232-UNV-1/4-EB	TIA Industrial uplight reflector, 8', T8 (4 lamps), UNV	734340608236	33
TIS232-UNV-1/4-EB	TIS Industrial Solid Reflector, 8', T8 (4 lamps), UNV	734340608250	33
FL-173	Wire Guard, Use w/ 1F Industrial, 2F Industrial, 1FD Industrial	782343296202	100



Vapourtite



FSX



VTC



DW



V3WEZ



V3W

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
FluxStream LED Sealed Strip					
FSX440L840-UNV	4', 4000lm, 4000K (CRI 80), UNV, 0-10V Dimming			784197416102	60
VTC Sealed Strip LED					
VTC36L840-UNV	4', 3600lm, 4000K (CRI 80), UNV, Non-dimmable			190096130283	36
DW Vaporlume LED					
DWAE43L840-4-UNV	4', 4300lm, 4000K (CRI 80), UNV, Acrylic lens		PREMIUM	782343500712	50
V3W Vaporlume EZ LED					
V3WEZ440L840-UNV	4', 4000lm, 4000K (CRI 80), UNV, Acrylic lens, Non-Dimmable			784197628253	50
V3W Vaporlume LED					
V3W443L840-UNV-DIM	4', 4300lm, 4000K (CRI 80), UNV, Acrylic lens		PREMIUM	784197426552	50
V3W470L840-UNV-DIM	4', 7000lm, 4000K (CRI 80), UNV, Acrylic lens		PREMIUM	784197426514	50
Vaporlume Accessories					
TBK	DWAE Stainless Steel Top Bracket Kit (pair of brackets plus hardware)			734340374599	100
WBK	Wall Bracket for V2/DW Vaporlume			781370485887	200

A modern office interior with a teal overlay. The scene features a large conference table with high-backed chairs, a patterned carpet, and large windows in the background. The ceiling has a grid pattern with recessed lighting. The text "Recessed & Surface" is centered in white.

Recessed & Surface



FluxPanel



Catalogue Number	Description / Features		UPC	Pallet Qty.
FluxPanel LED	1×4'			
1FXP38B835-4-DS-UNV-DIM	3800lm, 3500K (CRI 80), UNV, 0-10V Dimming		• 784197381370	40
1FXP38B840-4-DS-UNV-DIM	3800lm, 4000K (CRI 80), UNV, 0-10V Dimming		• 784197381349	40
1FXP38L835-4-DS-UNV-DIM-IAP	3800lm, 3500K (CRI 80), UNV, 0-10V Dimming	interact ready.	• 784197642211	50
1FXP38L840-4-DS-UNV-DIM-IAP	3800lm, 4000K (CRI 80), UNV, 0-10V Dimming	interact ready.	• 784197642280	50
1FXP38L840-4-DS-347-DIM	3800lm, 4000K (CRI 80), 347V, 0-10V Dimming		• 784197695606	50
	2×2'			
2FXP38B835-2-DS-UNV-DIM	3800lm, 3500K (CRI 80), UNV, 0-10V Dimming		• 784197381363	40
2FXP38B835-2-DS-347-DIM	3800lm, 3500K (CRI 80), 347V, 0-10V Dimming		• 190096130115	50
2FXP38B840-2-DS-UNV-DIM	3800lm, 4000K (CRI 80), UNV, 0-10V Dimming		• 784197381332	40
2FXP38L835-2-DS-UNV-DIM-IAP	3800lm, 3500K (CRI 80), UNV, 0-10V Dimming	interact ready.	• 784197642259	52
2FXP38L840-2-DS-UNV-DIM-IAP	3800lm, 4000K (CRI 80), UNV, 0-10V Dimming	interact ready.	• 784197642242	52
2FXP38B840-2-DS-347-DIM	3800lm, 4000K (CRI 80), 347V, 0-10V Dimming		• 190096130108	50

Catalogue Number	Description / Features			UPC	Pallet Qty.
2x4'					
2FXP42B835-4-DS-UNV-DIM	4200lm, 3500K (CRI 80), UNV, 0-10V Dimming		•	784197381356	40
2FXP42B835-4-DS-347-DIM	4200lm, 3500K (CRI 80), 347V, 0-10V Dimming		•	190096130092	40
2FXP42B840-4-DS-UNV-DIM	4200lm, 4000K (CRI 80), UNV, 0-10V Dimming		•	784197381325	40
2FXP42B840-4-DS-347-DIM	4200lm, 4000K (CRI 80), 347V, 0-10V Dimming		•	190096130085	40
2FXP43L835-4-DS-UNV-DIM-IAP	4300lm, 3500K (CRI 80), UNV, 0-10V Dimming		•	784197642228	40
2FXP43L840-4-DS-UNV-DIM-IAP	4300lm, 4000K (CRI 80), UNV, 0-10V Dimming		•	784197642235	40
2FXP48L840-4-DS-UNV-DIM	4800lm, 4000K (CRI 80), UNV, 0-10V Dimming		•	784197617653	50



FluxGrid



Catalogue Number	Description / Features		UPC	Pallet Qty.
FluxGrid LED				
1×4'				
1FGG38L840-4-D-UNV-DIM-IAP	1×4', 3800lm, 4000K (CRI 80), UNV, 0-10V Dimming	interact ready.	• 784197655501	39
1FGG38L840-4-D-347-DIM	1×4', 3800lm, 4000K (CRI 80), 347V, 0-10V Dimming		• 784197269043	39
1FGG41B840-4-D-UNV-DIM	1×4', 4100lm, 4000K (CRI 80), UNV, 0-10V Dimming		• 784197242282	39
1FGG41B835-4-D-UNV-DIM	1×4', 4100lm, 3500K (CRI 80), UNV, 0-10V Dimming		• 784197203634	39
2×2'				
2FGG30L835-2-D-UNV-DIM	3000lm, 3500K (CRI 80), UNV, 0-10V Dimming		• 622252778089	52
2FGG38B835-2-D-UNV-DIM	3800lm, 3500K (CRI 80), UNV, 0-10V Dimming		• 784197203641	52
2FGG38B840-2-D-UNV-DIM	3800lm, 4000K (CRI 80), UNV, 0-10V Dimming		• 784197242268	52
2×4'				
2FGG38L835-4-D-UNV-DIM	3800lm, 3500K (CRI 80), UNV, 0-10V Dimming		• 622252783496	26
2FGG38L840-2-D-UNV-DIM-IAP	3800lm, 4000K (CRI 80), UNV, 0-10V Dimming	interact ready.	• 784197655440	52
2FGG42B835-4-D-UNV-DIM	4200lm, 3500K (CRI 80), UNV, 0-10V Dimming		• 784197203658	26
2FGG42B840-4-D-UNV-DIM	4200lm, 4000K (CRI 80), UNV, 0-10V Dimming		• 784197242237	26
2FGG43L840-4-D-UNV-DIM-IAP	4300lm, 4000K (CRI 80), UNV, 0-10V Dimming	interact ready.	• 784197655457	26
2FGG48L835-4-D-UNV-DIM	4800lm, 3500K (CRI 80), UNV, 0-10V Dimming		• 784197242305	26
2FGG48L840-4-D-UNV-DIM	4800lm, 4000K (CRI 80), UNV, 0-10V Dimming		• 784197242220	26



TG8



OWL



OW



CFW


Catalogue Number	Description / Features	 	UPC	Pallet Qty.
TG Troffer				
1TG8232-01-UNV-1/2-EB	1×4', 2 Lamp, T8 32W, UNV, Electronic Ballast, FS, Pattern 12 Prismatic		781370952631	24
2TG8432-01-347-1/4-EB	2×4', 4 Lamp, T8 32W, 347V, Electronic Ballast, FS, Pattern 12 Prismatic		734340962116	26
2TG8432-01-UNV-1/4-EB	2×4', 4 Lamp, T8 32W, UNV, Electronic Ballast, FS, Pattern 12 Prismatic		734340976595	26
Accessories				
FMA14	1×4' Drywall Flange Kit		734340775488	100
FMA22	2×2' Drywall Flange Kit		734340775471	100
FMA24	2×4' Drywall Flange Kit		734340775464	100
OWL Wraparound LED				
OWL440L835-UNV-DIM	4', 4000lm, 3500K (CRI 80), UNV, 0-10V Dimming	•	781370097219	40
OWL440L840-UNV-DIM	4', 4000lm, 4000K (CRI 80), UNV, 0-10V Dimming	•	781370049003	40
OW Wraparound				
OWN232-UNV-1/2-EB	4', 2 Lamp, T8 32W, UNV, Electronic Ballast		734340608281	40
CFW Wraparound				
CFW232-120-1/2EB-GENIS	4', 2 Lamp, T8 32W, 120V, Electronic ballast, Acrylic lens		773849355036	18




SlimLux



Catalogue Number	Description / Features		UPC	Pallet Qty.
SlimLux LED	Lightbar			
SL1P04835NGW	4', 3500K (CRI 80) White	•	190096130023	112
SL1P04840NGW	4', 4000K (CRI 80) White	•	190096130009	112
Driver Pods ¹				
SL04SG38LUNVDIM1	Driver Pod for 1 Lightbar, 3800lm/4ft, UNV, DIM ²	•	784197656027	40
SL04QG38LUNVDIM1	Driver Pod for 4 Lightbars, 3800lm/4ft, UNV, DIM	•	784197656010	40
SL04MG38LUNVDIM1	Driver Pod for 8 Lightbars, 3800lm/4ft, UNV, DIM ³	•	784197656034	40




Easy-click method
for faster installation

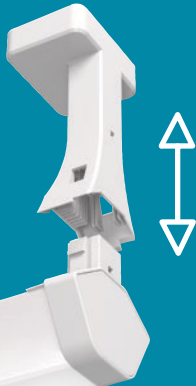

Driver pods include
integral clips for mounting
to T-bar above the ceiling



Quick Connects
to Light Bar

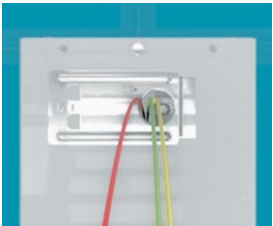

Quick Connect
to building mains

- 1 Note that each Driver Pod is designed for the exact amount of lightbars.
For example: Q pod must be installed and operated with 4 lightbars.
- 2 Single (S) driver pod is direct wire to lightbar.
Quad (Q) and Oct (M) driver pods include two-port push in wire connections.
- 3 Oct (M) driver pod includes four connection ports on each side of splice box.



Step out of the recessed zone

Facility manager or owners are always looking for the best lighting solution in T-grid ceiling environments. In the past, this often meant sacrificing the comfort, style and quality of indirect lighting. Ceiling height, budget constraints and other limiting factors left you with various recessed architectural troffers to choose from.

SlimLux from Day-Brite gives you a high performance, low profile, LED linear solution at the same installed cost as a typical architectural troffer. No more sacrifices... choose style and performance. **Smooth, slender, SlimLux.**

Learn more @ cfi-lighting.com/slimlux

LIGHTOLIER


Indoor Track & Downlighting



Mini Downlight LED / Mini Gimbal LED | 38



Lightolier is a global market leader widely recognized for its innovative LED lighting solutions with an unmatched commitment to technology leadership, reliability, visual appeal and high performance. The Lightolier comprehensive product offering provides you with a quick and easy way to select both downlighting and track lighting solutions that complement every lighting application.

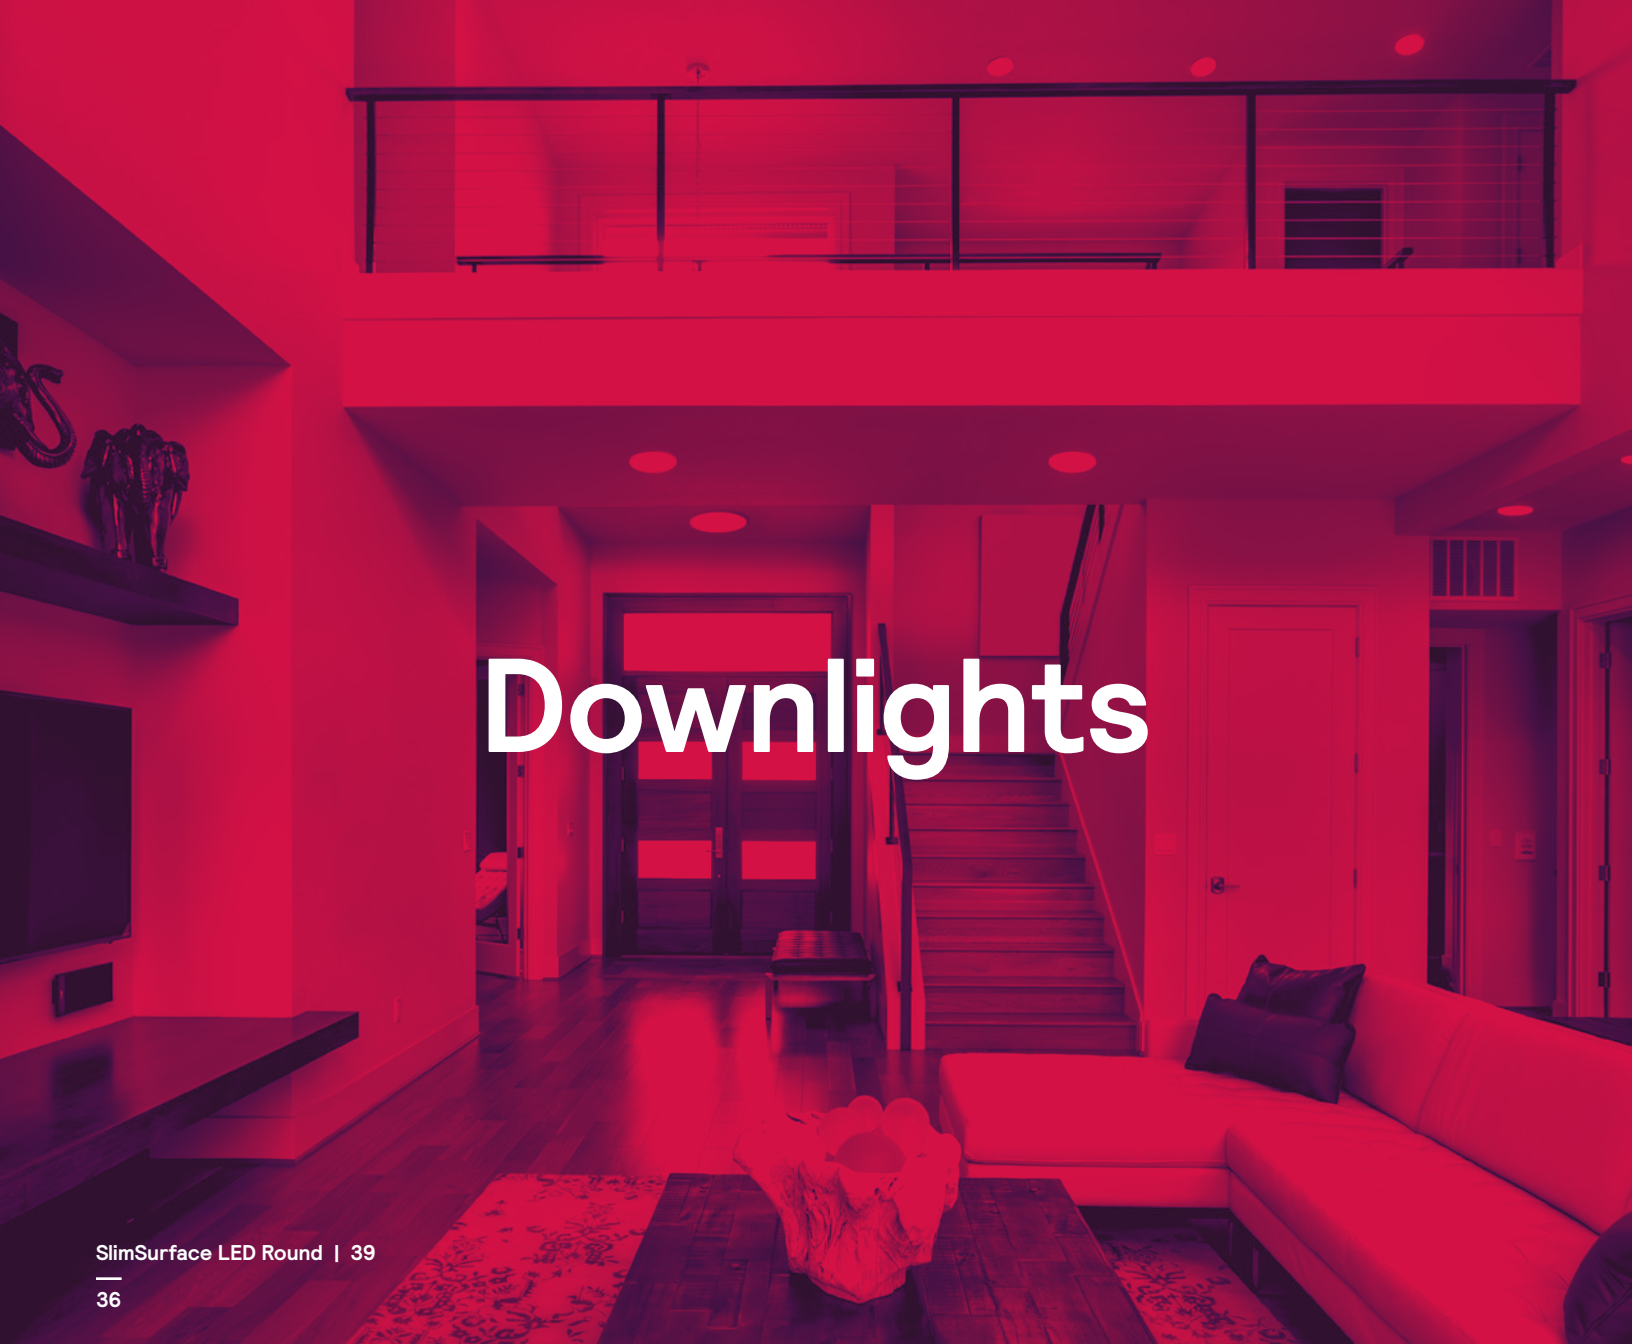A modern living room interior featuring a light-colored sectional sofa, a dark wood coffee table with a large, textured centerpiece, and a patterned rug. In the background, there is a staircase with a wooden railing and a glass-paned door. The room is illuminated by recessed ceiling lights. The entire image is overlaid with a semi-transparent red filter.

Downlights



FD

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY CONNECTED	UPC	Pallet Qty.
Flat Downlight LED					
4" Round, TRIAC / ELV Dimming					
FD4R07930TE1W	700lm, 3000K (CRI 90), 120V, White	•		190096016129	576
FD4R07940TE1W	700lm, 4000K (CRI 90), 120V, White	•		190096017027	576
6" Round, TRIAC / ELV Dimming					
FD6R09930TE1W	900lm, 3000K (CRI 90), 120V, White	•		190096016143	288
FD6R09940TE1W	900lm, 4000K (CRI 90), 120V, White	•		190096017041	288
Accessories					
FDRN	New Construction Plate, 4" & 6" Round	•		190096016167	100
FD06C	6' Extension Cable	•		190096016181	100
FD20C	20' Extension Cable	•		190096016198	100



MD



MG



C2L

Catalogue Number	Description / Features	ENERGY STAR	DLC LISTED	UPC	Pallet Qty.
Mini Downlight LED 3" Round, TRIAC Dimming					
MD3R069301FW	550lm, 3000K (CRI 90), Flood, White	•		190096017409	576
MD3R069401FW	550lm, 4000K (CRI 90), Flood, White	•		190096017416	576
Mini Gimbal LED 3" Round, TRIAC Dimming					
MG3R06930NF1B	550lm, 3000K (CRI 90), Narrow Flood, Black	•		190096017287	576
MG3R06930NF1N	550lm, 3000K (CRI 90), Narrow Flood, Brushed Nickel	•		190096017294	576
MG3R06930NF1W	550lm, 3000K (CRI 90), Narrow Flood, White	•		190096017270	432
MG3R06940NF1B	550lm, 4000K (CRI 90), Narrow Flood, Black	•		190096017317	576
MG3R06940NF1N	550lm, 4000K (CRI 90), Narrow Flood, Brushed Nickel	•		190096017324	576
MG3R06940NF1W	550lm, 4000K (CRI 90), Narrow Flood, White	•		190096017300	576
Mini Downlight / Mini Gimbal Accessories					
MDRN	New Construction Plate, 3" Round	•		190096017355	100
MD06C	6' Extension Cord	•		190096017331	100
MD20C	20' Extension Cord	•		190096017348	100
Calculite LED 1.75" Downlight, 900lm (Frame with Integral LED and optics only, trim sold separately*)					
C2L09DL930RZ10U	3000K (CRI 90), UNV, 0-10V Dimming	•		190096017126	50
C2L09DL930RE1	3000K (CRI 90), 120V, ELV Dimming	•		190096017164	50

* Trims need to be ordered separately under MTO for a complete luminaire [Frame + Trim or Micro Vetro (optional)]



SD



S5R / S7R



S4S / S6S



Catalogue Number	Description / Features		UPC	Pallet Qty.
Surface Mount Downlight LED	TRIAC / ELV Dimming			
SD5R079301W	5" Round, 700lm, 3000K (CRI 90), 120V, White	•	190096016426	360
SD7R099301W	7" Round, 1000lm, 3000K (CRI 90), 120V, White	•	190096016433	240
SlimSurface LED Round	5" Round, TRIAC / ELV Dimming			
S5R827K7	600lm, 2700K (CRI 80), 120V, White	•	662057988672	336
S5R927K7	600lm, 2700K (CRI 90), 120V, White	•	662057988702	324
S5R830K7	600lm, 3000K (CRI 80), 120V, White	•	662057936055	336
S5R835K7	600lm, 3500K (CRI 80), 120V, White	•	662057985480	336
S5R840K7	600lm, 4000K (CRI 80), 120V, White	•	662057985510	50
	7" Round, TRIAC / ELV Dimming			
S7R827K10	900lm, 2700K (CRI 80), 120V, White	•	662057988726	180
S7R830K10	900lm, 3000K (CRI 80), 120V, White	•	662057988740	160
SlimSurface LED Square	4" Square, TRIAC / ELV Dimming			
S4S827K7	600lm, 2700K (CRI 80), 120V, White	•	662057988788	216
S4S830K7	600lm, 3000K (CRI 80), 120V, White	•	662057988801	378
	6" Square, TRIAC / ELV Dimming			
S6S827K10	900lm, 2700K (CRI 80), 120V, White	•	662057988849	200
S6S830K10	900lm, 3000K (CRI 80), 120V, White	•	662057988863	200



RD



CR




The Commercial Retrofit Downlight LED features a **field adjustable lumen output switch** making it great for different ceiling heights and light level needs.

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
Retrofit Downlight LED					
TRIAC / ELV Dimming					
RD4R089301W	4" Round, 800lm, 3000K (CRI 90), 120V, White	•		190096016389	336
RD5R129301W	5/6" Round, 1200lm, 3000K (CRI 90), 120V, White	•		190096016396	144
Commercial Retrofit Downlight LED					
4" Round, 500lm / 750lm / 1000lm					
CR4R10930UW	4" Round, 500lm / 750lm / 1000lm, 3000K (CRI 90)	•		190096017621	336
CR4R10935UW	4" Round, 500lm / 750lm / 1000lm, 3500K (CRI 90)	•		190096017638	336
CR4R10940UW	4" Round, 500lm / 750lm / 1000lm, 4000K (CRI 90)	•		190096017645	336
6" Round, 700lm / 1000lm / 1500lm					
CR6R15930UW	6" Round, 700lm / 1000lm / 1500lm, 3000K (CRI 90)	•		190096017669	180
CR6R15935UW	6" Round, 700lm / 1000lm / 1500lm, 3500K (CRI 90)	•		190096017676	180
CR6R15940UW	6" Round, 700lm / 1000lm / 1500lm, 4000K (CRI 90)	•		190096017683	180
8" Round, 1000lm / 1500lm / 2300lm					
CR8R23930UW	8" Round, 1000lm / 1500lm / 2300lm, 3000K (CRI 90)	•		190096017706	144
CR8R23935UW	8" Round, 1000lm / 1500lm / 2300lm, 3500K (CRI 90)	•		190096017713	144
CR8R23940UW	8" Round, 1000lm / 1500lm / 2300lm, 4000K (CRI 90)	•		190096017720	144
9.5" Round, 1500lm / 2000lm / 3200lm					
CR10R30930UW	9.5" Round, 1500lm / 2000lm / 3200lm, 3000K (CRI 90)	•		190096017744	144
CR10R30935UW	9.5" Round, 1500lm / 2000lm / 3200lm, 3500K (CRI 90)	•		190096017751	144
CR10R30940UW	9.5" Round, 1500lm / 2000lm / 3200lm, 4000K (CRI 90)	•		190096017768	144



CP4R

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
CorePro 4"					
Frame					
CP4RN	New Construction Housing, IC c/w LED Connector	•		662057939094	210
CP4RR	Remodeler Housing, IC c/w LED Connector	•		662057939100	252
LED 4" Round, 10% TRIAC Dimming					
CP4RB07830W	800lm, 3000K (CRI 80), 120V, White	•		662057939018	576
CP4RB07840W	800lm, 4000K (CRI 80), 120V, White	•		662057939025	576
CorePro 5"					
Frame					
CP5RN	New Construction Housing, IC c/w LED Connector	•		662057939117	168
CP5RR	Remodeler Housing, IC c/w LED Connector	•		662057939124	144
LED 5" Round, 10% TRIAC Dimming					
CP5RB08830W	950lm, 3000K (CRI 80), 120V, White	•		662057939049	324
CP5RB08840W	1000lm, 4000K (CRI 80), 120V, White	•		662057939056	324
CorePro 6"					
Frame					
CP6RN	New Construction Housing, IC c/w LED Connector	•		662057939131	144
CP6RR	Remodeler Housing, IC c/w LED Connector	•		662057939148	168
LED 6" Round, 10% TRIAC Dimming					
CP6RB10830W	1200lm, 3000K (CRI 80), 120V, White	•		662057939070	192
CP6RB10840W	1250lm, 4000K (CRI 80), 120V, White	•		662057939087	192

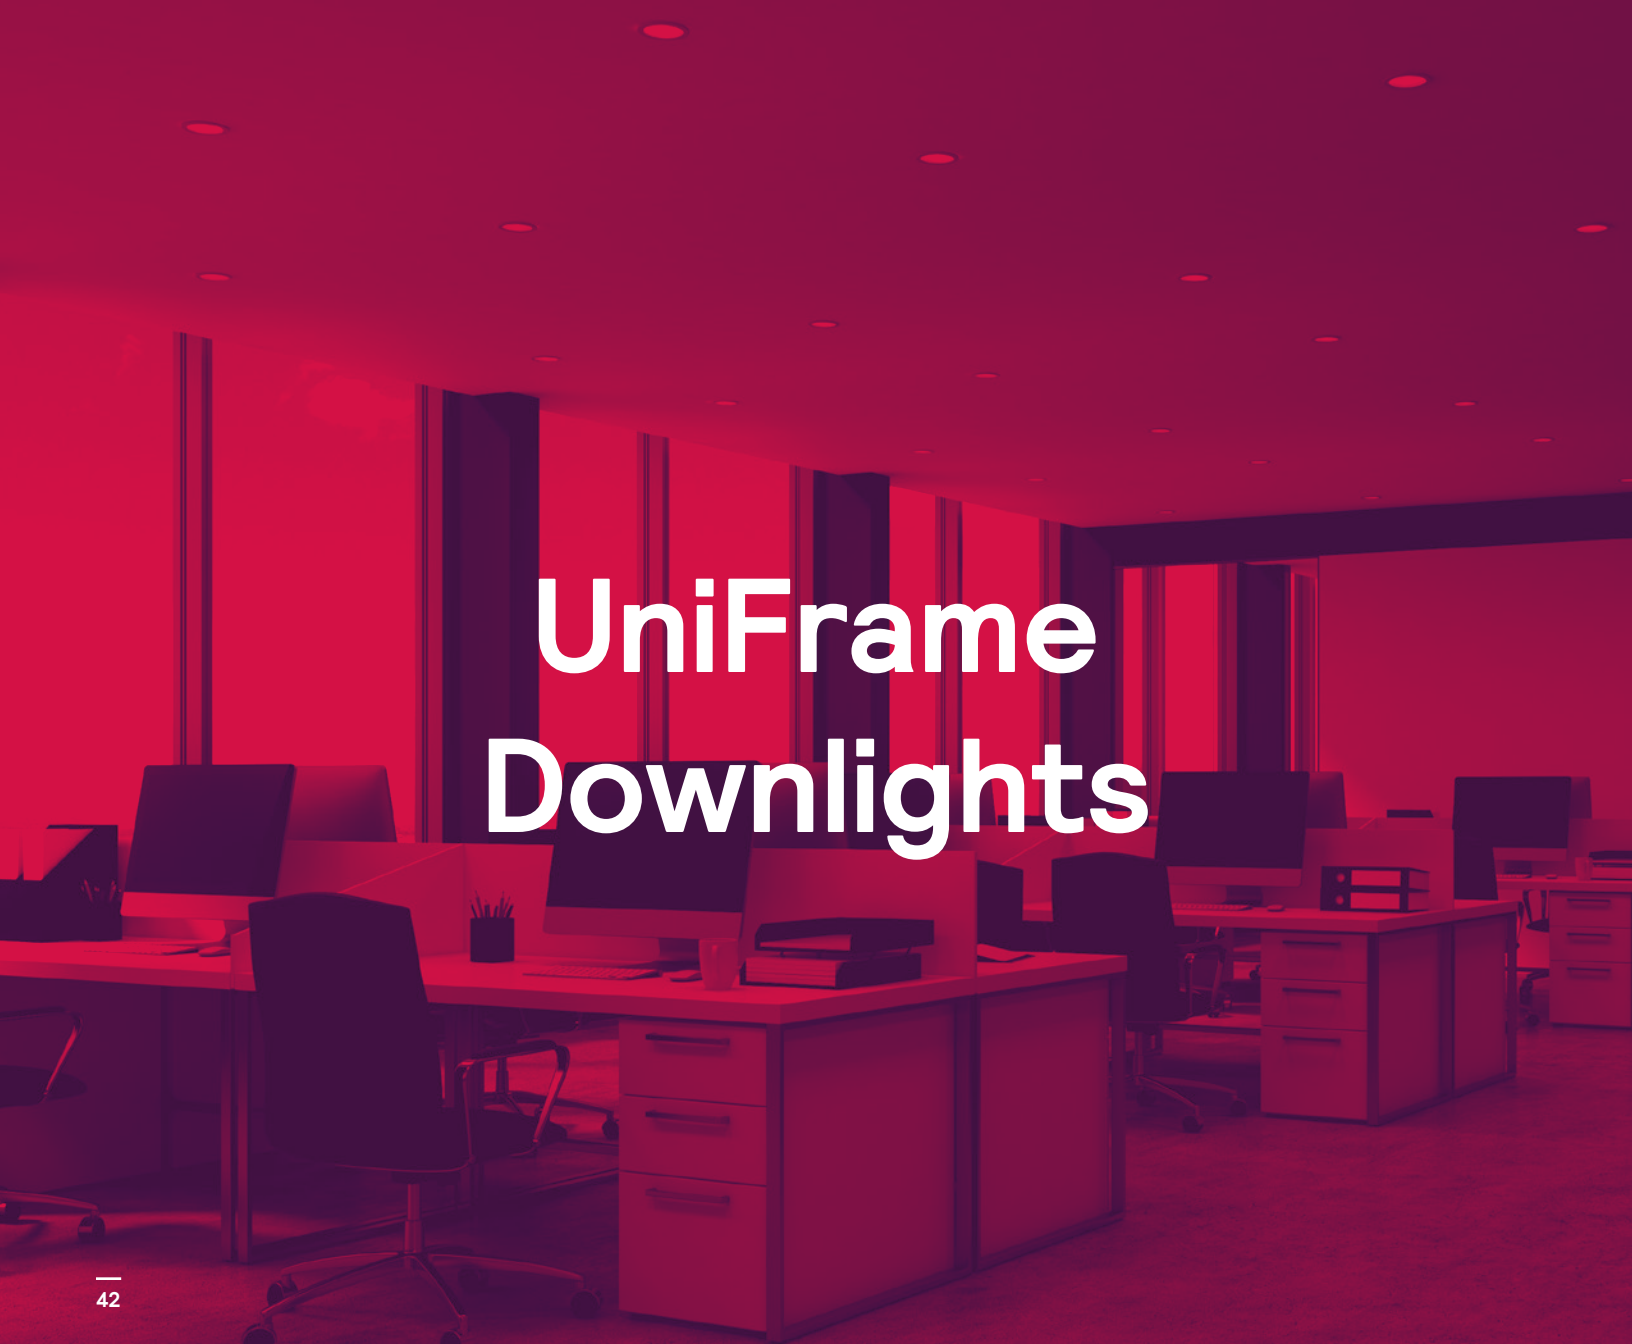


UniFrame Downlights

One frame for maximum flexibility

The **Lightolier UniFrame**, single frame solution architecture, is adaptable and designed around ever-changing project needs. Three unique downlight families all use this same frame. Your choices and flexibility are now endless.

- **Modular plug-and-play** receptacle enables quick and easy tool-free installation
- **Configurable solutions** mean installation can start sooner and be completed in stages
- **Future-proof** modular design allows easy upgrades without ceiling disturbance
- Unexpected design changes have **minimal schedule impact and waste**
- Option available for **Interact Pro wireless control**. For more information visit www.interact-lighting.com/pro

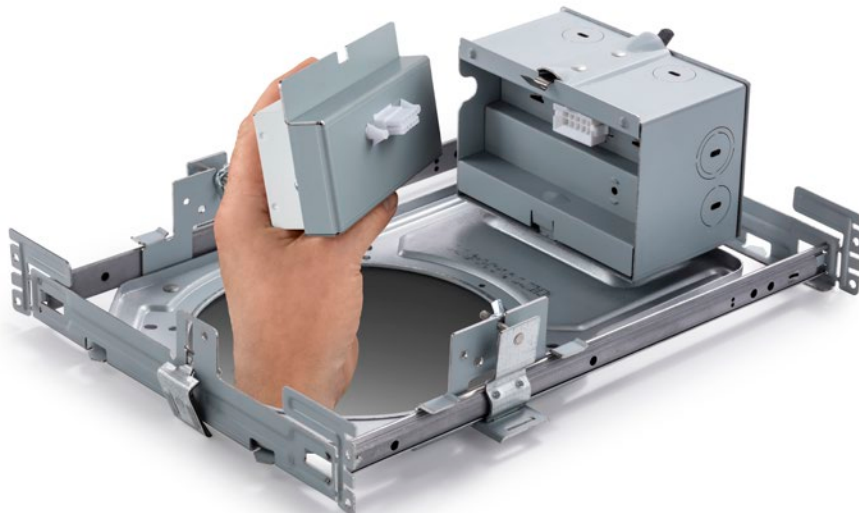

Calculite

Specification
3-part system
(pg. 44-45)



LyteProfile


Commercial
2-part system
(pg. 46-47)



EasyLyte

Light Commercial
2-part system
(pg. 48-49)





4RN



C4L



C4RDLCC



C4RDLCD



C4RDLCL

Catalogue Number	Description / Features			UPC	Pallet Qty.
Calculite LED 4"					
UniFrame 4"					
4RN	4" Round, New Construction (Non-IC), UNV	interact ready.	•	784197641924	96
4RNIP	4" Round, New Construction (Non-IC), UNV		•	190096017515	50
4RR3	4" Round, Remodeler (Non-IC), 347V		•	784197211462	50
4SN	4" Square, New Construction (Non-IC), UNV		•	784197641955	96
4" LED, Medium Beam (56°), 0-10V 1% Dimming, UNV					
C4L10830MZ10U	1000lm, 3000K (CRI 80)		•	662057974835	180
C4L10835MZ10U	1000lm, 3500K (CRI 80)		•	662057974842	180
Trim					
C4RDLCC	Comfort Clear Finish, White Flange		•	662057972008	210
C4RDLCD	Comfort Clear Diffuse Finish, White Flange		•	662057972305	50
C4RDLCL	Specular Clear Finish, White Flange		•	662057972299	50
Calculite CFL 4½"					
S4126VU	Frame 1-26W TTT 120/277V			662057932965	50
8011CCLW	Vertical Reflector			784197227227	180



6RN



C6L



C6RDLCC



C6RDLCD



C6RDLCL

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
Calculite LED 6"	UniFrame 6"				
6RN	6" Round, New Construction (Non-IC), UNV	•		784197641979	96
6RNIP	6" Round, New Construction (Non-IC), UNV	•	interact ready.	190096017553	50
6RR3	6" Round, Remodeler (Non-IC), 347V	•		784197211646	50
6SN	6" Square, New Construction (Non-IC), UNV	•		784197642006	72
	6" LED, Medium Beam (55°), 0-10V 1% Dimming, UNV				
C6L15835MZ10U	1500lm, 3500K (CRI 80)	•		662057978109	180
C6L20830MZ10U	2000lm, 3000K (CRI 80)	•		662057979533	180
C6L20835MZ10U	2000lm, 3500K (CRI 80)	•		662057979625	180
	Trim				
C6RDLCC	Comfort Clear Finish	•		662057972862	96
C6RDLCD	Comfort Clear Diffuse Finish	•		662057972886	120
C6RDLCL	Specular Clear Finish	•		662057972879	50
	Accessories				
1950	Mounting Bars 18" Set of (2) (Order in Multiples of 12)			784197145002	500
1951	Mounting Bars 27" Set of (2) (Order in Multiples of 12)			784197145033	500



4RN



P4RDL

Catalogue Number	Description / Features	ENERGY STAR	DLC	UPC	Pallet Qty.
LyteProfile LED 4"	UniFrame 4"				
4RN	4" Round, New Construction (Non-IC), UNV	•		784197641924	96
4RNIP	4" Round, New Construction (Non-IC), UNV	•	interact ready.	190096017515	50
4RR3	4" Round, Remodeler (Non-IC), 347V	•		784197211462	50
4SN	4" Square, New Construction (Non-IC), UNV	•		784197641955	96
	LED 4" Round, Comfort Clear finish, White flange, 0-10V 1% Dimming, UNV				
P4RDL10830CCZ10U	1000lm, 3000K (CRI 80)	•		190096102570	96
P4RDL10835CCZ10U	1000lm, 3000K (CRI 80)	•		190096105441	96
P4RDL15830CCZ10U	1500lm, 3000K (CRI 80)	•		190096102600	96
P4RDL15835CCZ10U	1500lm, 3000K (CRI 80)	•		190096104406	96
P4RDL20830CCZ10U	2000lm, 3000K (CRI 80)	•		190096102624	96
P4RDL20835CCZ10U	2000lm, 3000K (CRI 80)	•		190096102631	96



6RN



P6RDL

Catalogue Number	Description / Features	ENERGY STAR	DLC LISTED	UPC	Pallet Qty.
LyteProfile LED 6"	UniFrame 6"				
6RN	6" Round, New Construction (Non-IC), UNV	•		784197641979	96
6RNIP	6" Round, New Construction (Non-IC), UNV	•	interact ready.	190096017553	50
6RR3	6" Round, Remodeler (Non-IC), 347V	•		784197211646	50
6SN	6" Square, New Construction (Non-IC), UNV	•		784197642006	72
	LED 6" Round, Comfort Clear finish, White flange, 0-10V 1% Dimming, UNV				
P6RDL10830CCZ10U	1000lm, 3000K (CRI 80)	•		190096105755	50
P6RDL10835CCZ10U	1000lm, 3500K (CRI 80)	•		190096128211	50
P6RDL15830CCZ10U	1500lm, 3000K (CRI 80)	•		190096105816	72
P6RDL15835CCZ10U	1500lm, 3500K (CRI 80)	•		190096105823	72
P6RDL20830CCZ10U	2000lm, 3000K (CRI 80)	•		190096102716	72
P6RDL20835CCZ10U	2000lm, 3500K (CRI 80)	•		190096105885	72



4RN



Z4RDL

Catalogue Number	Description / Features	ENERGY STAR	DLC	UPC	Pallet Qty.
EasyLyte LED 4"	UniFrame 4"				
4RN	4" Round, New Construction (Non-IC), UNV	•		784197641924	96
4RNIP	4" Round, New Construction (Non-IC), UNV	•	interact ready.	190096017515	50
4RR3	4" Round, Remodeler (Non-IC), 347V	•		784197211462	50
4SN	4" Square, New Construction (Non-IC), UNV	•		784197641955	96
	LED 4" Round, Wide, Open downlight, Clear diffuse finish, 0-10V 1% Dimming, UNV				
Z4RDL10835WOCZ10U	1000lm, 3500K (CRI 80)	•		190096103072	96
Z4RDL10840WOCZ10U	1000lm, 4000K (CRI 80)	•		190096106639	96
Z4RDL15835WOCZ10U	1500lm, 3500K (CRI 80)	•		190096103096	96
Z4RDL15840WOCZ10U	1500lm, 4000K (CRI 80)	•		190096103102	96
Z4RDL20835WOCZ10U	2000lm, 3500K (CRI 80)	•		190096103119	96
Z4RDL20840WOCZ10U	2000lm, 4000K (CRI 80)	•		190096106875	96



6RN



Z6RDL

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY CONNECTED	UPC	Pallet Qty.
EasyLyte LED 6"	UniFrame 6"				
6RN	6" Round, New Construction (Non-IC), UNV	•		784197641979	96
6RNIP	6" Round, New Construction (Non-IC), UNV	•	interact ready.	190096017553	50
6RR3	6" Round, Remodeler (Non-IC), 347V	•		784197211646	50
6SN	6" Square, New Construction (Non-IC), UNV	•		784197642006	72
	LED 6" Round, Open downlight, Clear diffuse finish, 0-10V 1% Dimming, UNV				
Z6RDL15835WOCZ10U	1500lm, 3500K (CRI 80)	•		190096103140	72
Z6RDL15840WOCZ10U	1500lm, 4000K (CRI 80)	•		190096103157	72
Z6RDL20835WOCZ10U	2000lm, 3500K (CRI 80)	•		190096103171	72
Z6RDL20840WOCZ10U	2000lm, 4000K (CRI 80)	•		190096103195	72




LyteCaster Downlights

Defining general purpose LED downlights

Lightolier LyteCaster LED downlight and accent luminaires provide comfortable, quality illumination. LyteCaster's shallow frame height fits into tight plenum spaces and the adaptable design makes it a versatile lighting option.

- The frame includes **90° swivel** mounting bar points and offset holes for applications close to joints for easy installation
- **Modular and innovative** light engine that's easy to install and upgrade
- **High efficacy** with up to 90 lm/W helps provide greater cost and energy savings
- **Wet location listed** with no need for special lens design

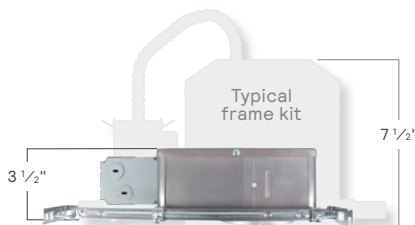

New Construction

LyteCaster LED Accent and Downlights share the same AirSeal IC rated frame that is 3 1/2" in height. The shallow height saves plenum space without compromising the physical and reflected cutoff.



Remodeler

A remodeler is available for accent and downlight in a shallow construction that is under 5 3/8". Accent is non-IC and downlight is IC/AirSeal rated.



Accent
3-part system



Downlight
3-part system



Housing



Light Engine

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY CONNECTED	UPC	Pallet Qty.
LyteCaster 3" LED Accent					
Housing					
L3ANE1	New construction with nails (Non-IC), ELV/TRIAC Dimming, 120V	•		662057999333	90
L3CE1	Remodeler (Non-IC)*, ELV/TRIAC Dimming, 120V (*not compatible with adjustable trim)	•		662057999319	120
LED					
L308830F	800lm, 3000K (CRI 80), Flood (33°)	•		662057998053	432
L308830NF	800lm, 3000K (CRI 80), Narrow Flood (22°)	•		662057998015	450
L308835F	800lm, 3500K (CRI 80), Flood (33°)	•		662057998138	450
L308835NF	800lm, 3500K (CRI 80), Narrow Flood (22°)	•		662057998121	500



Adjustable Trim



Downlight Trim



Gimbal Trim



Shower Trim



Catalogue Number	Description / Features	UPC	Pallet Qty.
Trim Round			
L3RAD	Adjustable, Diffuse Cone with white flange	662057997667	500
L3RAW	Adjustable, White Cone with white flange	662057997674	500
L3RDD	Downlight, Diffuse Cone with white flange	662057997629	500
L3RDW	Downlight, Chrome Cone with white flange	662057997636	500
L3RGA	Gimbal, Aluminum	662057997841	500
L3RGB	Gimbal, Black	662057997834	500
L3RGW	Gimbal, White	662057997827	500
L3RSW	Shower Light, White	662057997681	500
Trim Square			
L3SDD	Downlight, Diffuse Cone with white flange	662057997735	500
L3SDW	Downlight, White Cone with white flange	662057997759	500
L3SSW	Shower Light, White	662057997803	500
LyteCaster 3¼" Traditional Accessories			
0089L	3¼" LyteCaster remodeler long mounting plate	624563160072	1440
0089S	3¼" LyteCaster remodeler short mounting plate	624563107695	2160
Trims			
2076WB	3¼" Incandescent LyteCaster Basic Baffle White	662057674087	50
2076CH	3¼" Incandescent LyteCaster Basic Cone Chrome	662057698960	600



Housing



LED



L4RDD



L4RDW

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY CONNECTED	UPC	Pallet Qty.
LyteCaster 4" LED					
L4RANZ10UVA	New construction with nails (Airseal IC), 0-10V Dimming, UNV, Version A	•		662057941769	100
L4RANE1VA	New construction with nails (Airseal IC), ELV, 120V, Version A	•		662057941653	100
LED					
L4R06830VA	650lm, 3000K (CRI 80), Version A	•		662057998725	100
L4R06835VA	650lm, 3500K (CRI 80), Version A	•		662057998749	100
Trim Round					
L4RDD	Downlight, Clear diffuse with white flange			662057993706	100
L4RDW	Downlight, White with white flange			662057993713	100
LyteCaster 4¼" Traditional					
Accessories					
0092L	4¼" LyteCaster remodeler long mounting plate			624563159977	500
0092S	4¼" LyteCaster remodeler short mounting plate			624563107701	500



Housing



LED



L5RDW



L5RDD



L5RDW

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY CONNECTED	UPC	Pallet Qty.
LyteCaster 5" LED					
Housing					
L5RANZ10UVA	New construction with nails (Airseal IC), 0-10V Dimming, UNV, Version A	•		662057941714	100
L5RANE1VA	New construction with nails (Airseal IC), ELV, 120V, Version A	•		662057941707	100
LED					
L5R10830VA	1000lm, 3000K (CRI 80), Version A	•		662057941103	100
L5R10835VA	1000lm, 3500K (CRI 80), Version A	•		662057941110	100
Trim Round					
L5RBW	Baffle Downlight, White with white flange			662057993836	100
L5RDD	Downlight, Clear diffuse with white flange			662057993843	420
L5RDW	Downlight, White with white flange			662057993850	504
LyteCaster 5" Traditional					
Housing					
1002	5 1/4" Lytecaster Non-IC Frame Incandescent			624563015471	216
1004ICN	5" Incandescent Lytening New Construction IC & Non-IC Housing Nail			784197198596	144
1004ICR	5" Incandescent Lytening Remodeler IC & Non-IC Housing Screw			784197159320	144
Trim					
1076CH	5 1/4" Lytecaster Basic Specular Cone chrome reflector Trim			662057672120	210
1076WH	5" Basic White Baffle			784197107604	432



Housing



LED



L6RDW



L6RDD




L6RDW

Catalogue Number	Description / Features	ENERGY STAR	DLC LISTED	UPC	Pallet Qty.
LyteCaster 6" LED					
Housing					
L6RANZ10UVA	New construction with nails (Airseal IC), 0-10V Dimming, UNV, Version A	•		662057999715	100
L6RANE1VA	New construction with nails (Airseal IC), ELV, 120V, Version A	•		662057994079	100
LED					
L6R15830VA	1500lm, 3000K (CRI 80), Version A	•		662057941202	100
L6R15835VA	1500lm, 3500K (CRI 80), Version A	•		662057941219	100
Trim Round					
L6RBW	Baffle Downlight, White with white flange			662057993980	250
L6RDD	Downlight, Clear diffuse with white flange			662057993997	220
L6RDW	Downlight, White with white flange			662057994000	264
LyteCaster 6" Traditional					
Housing					
1102P1	6¾" Incandescent LyteCaster Non-IC Frame			784197110222	162
1176WH	6¾" Basic Baffle White			784197003517	360
1105CL	6¾" LyteCaster Reflector Alzak Cone Clear			662057679778	100
1176CH	6¾" LyteCaster Reflector Basic Cone Chrome			662057672144	240
Accessories					
1956	LyteCaster set of 4 Mounting Bar Clips			784197145132	500
VBE300	LyteCaster Vapour Barrier For 9" IC Box			784197343712	500



LytePoints Downlights



Housing



Trim



Catalogue Number	Description / Features	UPC	Pallet Qty.
LytePoints 3¾"			
	Housing		
300MRSPX	Remodeler Non-IC MR16 Magnetic Silent Pack	662057037196	540
302MRSPX	Non-IC Frame MR16 Magnetic Silent Pack	662057037141	504
303MRE	Non-IC Shallow Remodeler Electronic	784197316341	108
302MRIC7SPX	IC-Airseal Frame MR16 Magnetic Silent Pk 7" Box	662057037233	100
	Trim		
304CLX	Adjustable Cone Specular Clear	624563083418	216
305WHWX	MR16 Adjustable Baffle White	624563083319	264
375WHX	MR16 Adjustable Basic Baffle White	784197436094	486
378WHX	MR16 Adjustable Elbow White	784197436339	480
313BKX	MR16 Adjustable Gimbal Black	784197435660	432
313STX	MR16 Adjustable Gimbal Brushed Steel	784197435707	500
313WHX	MR16 Adjustable Gimbal White	784197435714	432
394CHX	MR16 Basic Cone Chrome	624563154132	500
348WHX	MR16 Open Square Adjustable White	662057036908	576



Housing



Trim



Catalogue Number	Description / Features	UPC	Pallet Qty.
LytePoints 4 1/4"			
Housing			
502AICSX	PAR20 Frame-In Kit IC/AirSeal	624563217226	200
502X	V-Frame Frame-In Kit Non-IC	624563088406	200
Trim			
594CHX	Adjustable Alzak Cone PAR20 Chrome	624563116758	200
575WHX	Adjustable Step Baffle PAR20 White	624563088451	200
516WHX	Contour PAR20 White	624563088550	200
501X	PAR20 Remodeler Swivel	624563088390	500
513BKX	Residence PAR20 Black	624563088512	200
513STX	Residence PAR20 Stainless	624563088529	200
513WHX	Residence PAR20 White	624563088543	200



Track Lighting

Track Head LED



LT08

TH



Catalogue Number	Description / Features		UPC	Pallet Qty.
CorePro LED Mini Cylinder				
ELV Dimming				
LT08RWF830BKVA	900lm, Wide Flood (35°), 3000K (CRI 80), Black	•	190096041923	100
LT08RWF830WHVA	900lm, Wide Flood (35°), 3000K (CRI 80), White	•	190096041916	100
Track Head LED				
1000lm, ELV / TRIAC (10%) Dimming				
TH10930NF1B	1000lm, 3000K (CRI 90), Narrow Flood (30°), 120V, Black	•	190096016495	100
TH10930NF1W	1000lm, 3000K (CRI 90), Narrow Flood (30°), 120V, White	•	190096016488	100
TH10930S1B	1000lm, 3000K (CRI 90), Spot (15°), 120V, Black	•	190096016471	100
TH10930S1W	1000lm, 3000K (CRI 90), Spot (15°), 120V, White	•	190096016464	100
3000lm, ELV / TRIAC (10%) Dimming				
TH30930F1B	3000lm, 3000K (CRI 90), Flood (36°), 120V, Black	•	190096016518	100
TH30930F1W	3000lm, 3000K (CRI 90), Flood (36°), 120V, White	•	190096016501	100
TH30930NF1B	3000lm, 3000K (CRI 90), Narrow Flood (22°), 120V, Black	•	190096016532	100
TH30930NF1W	3000lm, 3000K (CRI 90), Narrow Flood (22°), 120V, White	•	190096016525	100



6278WH



6320WH



8201WH



Catalogue Number	Description / Features	UPC	Pallet Qty.
LyteSpot PAR Ring			
6278WH	50W PAR20 White	784197627805	200
6282WH	75W PAR30S White	624563060259	200
Basic Track Head			
6320WH	Universal Lytespot White	624563019974	200
Par-Tech			
8201WH	Par-Tech Low Profile Adapter White	784197820107	200



851WH



55215WH



Monopoint



Gimbal Ring

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
LyteSpan Domelite					
851WH	MR16 50W White			662057632612	100
PAR Ring					
55215WH	250W PAR38 White			624563060242	200
55241WH	75W PAR30S Front Relamp White			624563030054	200
55242WH	250W PAR38 Front Relamp White			624563030078	200
Round Monopoint					
6190BK	Black			784197619015	200
6190WH	White			784197619022	200
Gimbal Ring					
9030NBK	PAR30 Black			662057905907	200
9030NWH	PAR30 White			662057905914	200
9038NBK	PAR38 Black			662057905938	200
9038NWH	PAR38 White			662057905945	200



LyteSpan Track



6048NWH



6049NWH



6050NWH



6054NWH

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
LyteSpan	Plain Basic 1 Circuit Track with Dead End				
6004NBK	4' Black			784197594268	200
6004NWH	4' White			784197594275	200
6008NBK	8' Black			784197594282	200
6008NWH	8' White			784197594299	200
6012NWH	12' White			784197594312	200
	Live End				
6048NBK	Black			784197594589	400
6048NWH	White			784197594596	400
	Connectors				
6049NBK	Mini Coupler Black			784197594565	400
6049NWH	Mini Coupler White			784197594572	400
6050NWH	"L" Connector White			784197594473	400
6054NBK	In-Line Connector Black			784197594329	400
6054NWH	In-Line Connector White			784197594350	400
	Power Feed				
6063WH	Saddle Canopy Kit Power Feed White			784197606305	400



KEENE

Commercial Outdoor Lighting



Garage & Canopy LED | 69



The Keene brand features contractor-friendly outdoor lighting solutions that help make the most of your time and budget. Readily available and dependable luminaires suitable for a range of commercial application types.



Area & Canopy



AL



GC40 / GC57



GC88

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
Area Light LED					
150W					
AL150-NW-G1-AR-3-8-BZ	150W, 4000K (CRI 70), Arm mount, Type 3, 120-277V, Bronze		•	783352023971	20
AL150-NW-G1-AR-3-6-BZ	150W, 4000K (CRI 70), Arm mount, Type 3, 347V, Bronze		•	783352024015	20
AL150-NW-G1-AR-4-8-BZ	150W, 4000K (CRI 70), Arm mount, Type 4, 120-277V, Bronze		•	783352023995	20
AL150-NW-G1-AR-4-6-BZ	150W, 4000K (CRI 70), Arm mount, Type 4, 347V, Bronze		•	783352024039	20
200W					
AL200-NW-G1-AR-3-8-BZ	200W, 4000K (CRI 70), Arm mount, Type 3, 120-277V, Bronze		•	783352023988	20
AL200-NW-G1-AR-3-6-BZ	200W, 4000K (CRI 70), Arm mount, Type 3, 347V, Bronze		•	783352024022	20
AL200-NW-G1-AR-4-8-BZ	200W, 4000K (CRI 70), Arm mount, Type 4, 120-277V, Bronze		•	783352024008	20
AL200-NW-G1-AR-4-6-BZ	200W, 4000K (CRI 70), Arm mount, Type 4, 347V, Bronze		•	783352024046	20
Garage & Canopy LED					
40W					
GC40-NW-G1-SM-5-8-BZ	40W, 4000K (CRI 70), Type 5 Symmetric, 120-277V, Bronze		•	783352024251	72
GC40-NW-G1-SM-5-6-BZ	40W, 4000K (CRI 70), Type 5 Symmetric, 347V, Bronze		•	783352024275	72
57W					
GC57-NW-G1-SM-5-8-BZ	57W, 4000K (CRI 70), Type 5 Symmetric, 120-277V, Bronze		•	783352024268	72
GC57-NW-G1-SM-5-6-BZ	57W, 4000K (CRI 70), Type 5 Symmetric, 347V, Bronze		•	783352024282	72
88W					
GC88-NW-G1-SM-5-8-BZ	88W, 4000K (CRI 70), Type 5 Symmetric, 120-277V, Bronze		•	624563340115	36
GC88-NW-G1-SM-5-6-BZ	88W, 4000K (CRI 70), Type 5 Symmetric, 347V, Bronze		•	624563340122	36

A photograph of a modern, two-story brick building at night. The building features large windows and a flat roof. Two floodlights are mounted on the roof, casting a bright light on the building's facade. The scene is dimly lit, with the primary light source being the floodlights. The word "Floodlights" is overlaid in large white text in the center of the image.

Floodlights



FL



TF



BT10

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
General Purpose Flood LED					
FL150-NW-G1-T-FL-6-BZ	150W, 4000K (CRI 70), Yoke mount, 347V, Bronze		•	783352024237	20
FL300-NW-G1-T-FL-8-BZ	300W, 4000K (CRI 70), Yoke mount, 120-277V, Bronze		•	783352024190	12
FL300-NW-G1-T-FL-6-BZ	300W, 4000K (CRI 70), Yoke mount, 347V, Bronze		•	783352024244	12
LED SlimFlood					
TF10-NW-G1-K-FL-8-BZ	10W, 4000K (CRI 80), Yoke/Knuckle Mount, 120-277V, Bronze		•	783352025944	756
TF30-NW-G1-K-FL-8-BZ	30W, 4000K (CRI 80), Yoke/Knuckle Mount, 120-277V, Bronze		•	783352025951	540
TF50-NW-G1-K-FL-8-BZ	50W, 4000K (CRI 80), Yoke/Knuckle Mount, 120-277V, Bronze		•	783352025968	330
TF100-NW-G1-Y-FL-8-BZ	100W, 4000K (CRI 80), Yoke Mount, 120-277V, Bronze		•	783352025975	144
TF150-NW-G1-Y-FL-8-BZ	150W, 4000K (CRI 80), Yoke Mount, 120-277V, Bronze		•	783352025982	72
TF200-NW-G1-Y-FL-8-BZ	200W, 4000K (CRI 80), Yoke Mount, 120-277V, Bronze		•	783352025999	64
Mounting Adapter					
BT10	Universal slipfitter, converts yoke mount flood to tenon mount (fits 2 3/8" O.D. tenon), bronze finish			624290377736	336



Wallpacks



LPW7



LPW16



LPW32



PW

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
LytePro LED Wall Sconce 10W					
LPW7-G3-8-BZ	10W, 4000K (CRI 70), Type 2, 120-277V, Bronze			622252813858	504
LPW7-G3-8-DGY	10W, 4000K (CRI 70), Type 2, 120-277V, Dark Gray			622252813841	504
30W					
LPW16-G3-8-BZ	30W, 4000K (CRI 70), Type 3, 120-277V, Bronze			622252813872	144
LPW16-G3-8-DGY	30W, 4000K (CRI 70), Type 3, 120-277V, Dark Gray			622252813865	144
70W					
LPW32-G3-8-BZ	70W, 4000K (CRI 70), Type 3, 120-277V, Bronze			622252813896	96
LPW32-G3-8-DGY	70W, 4000K (CRI 70), Type 3, 120-277V, Dark Grey			622252813889	96
Low Profile Wall LED 15W					
PW15-NW-G1-8-BZ	15W, 4000K (CRI 80), 120-277V, Bronze			783352024299	120
PW15-NW-G1-6-BZ	15W, 4000K (CRI 80), 347V, Bronze			783352024329	120
30W					
PW30-NW-G1-8-BZ	30W, 4000K (CRI 80), 120-277V, Bronze			783352024305	120
PW30-NW-G1-6-BZ	30W, 4000K (CRI 80), 347V, Bronze			783352024336	120
50W					
PW50-NW-G1-8-BZ	50W, 4000K (CRI 80), 120-277V, Bronze			783352024312	48
PW50-NW-G1-6-BZ	50W, 4000K (CRI 80), 347V, Bronze			783352024343	48
80W					
PW80-NW-G1-8-BZ	80W, 4000K (CRI 80), 120-277V, Bronze			624563340146	36
PW80-NW-G1-6-BZ	80W, 4000K (CRI 80), 347V, Bronze			624563340153	36



LWL



SWL



TW



WP30



WP50 / WP75

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
LWL Wall Light LED					
LWL-WW-G2-PCB-1-BZ	12W, 3000K (CRI 80), 120V, Bronze, Button Photocell installed			783352025760	288
SWL Square Wall Light LED					
SWL-WW-G1-PCB-1-BZ	13W, 3000K (CRI 80), 120V, Bronze, Button Photocell installed			783352025777	144
Tall Wall Pack LED					
TW20-NW-G1-8-BZ	20W, 4000K (CRI 70), 120-277V, Bronze		•	783352024053	108
TW20-NW-G1-PCB-1-BZ	20W, 4000K (CRI 70), 120-277V, Bronze, Button Photocell installed		•	624563340139	108
Wall Pack LED					
30W					
WP30-NW-G1-8-BZ	30W, 4000K (CRI 70), 120-277V, Bronze		•	783352024060	120
WP30-NW-G1-6-BZ	30W, 4000K (CRI 70), 347V, Bronze		•	783352024091	120
50W					
WP50-NW-G1-8-BZ	50W, 4000K (CRI 70), 120-277V, Bronze		•	783352024077	48
WP50-NW-G1-6-BZ	50W, 4000K (CRI 70), 347V, Bronze		•	783352024107	48
75W					
WP75-NW-G1-8-BZ	75W, 4000K (CRI 70), 120-277V, Bronze		•	783352024084	48
WP75-NW-G1-6-BZ	75W, 4000K (CRI 70), 347V, Bronze		•	783352024114	48





Specialty



DTD40



BL



VCXL



VWXL



P105A

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
Dusk to Dawn LED					
DTD40-NW-G3-AR-5-TL-RPC-1-GY3S	40W, 4000K (CRI 70), Arm mount, Type 5, 120V, Twist lock receptacle + Photocell, Grey			624563339836	48
DTDARMGY3S	Mounting arm with hardware, 1.5" dia steel, gray finish			783352024145	48
LED Commercial Bollard					
BL25-NW-G1-5-8-BZ	25W, 4000K (CRI 70), Type 5 Symmetrical, 120-277V, Bronze finish			624563340306	9
RoughLyte LED					
VCXL-14-NW-G1-8	Ceiling mount, 14W, 4000K (CRI 70), 120-277V			783352024770	60
VWXL-14-NW-G1-8	Wall mounted, 14W, 4000K (CRI 70), 120-277V			783352024787	60
Photocontrols					
P105A	120V Button Photocell			190096001835	48



Decorative Outdoor Lighting

Hadco landscape lighting solutions blend craftsmanship with optical performance to provide a sense of security and beauty in parks, residential, or commercial settings.





BL9



IL9




TC152-12TP

Catalogue Number	Description / Features	ENERGY STAR	DLC QUALITY	UPC	Pallet Qty.
FlexScape BL9 LED					
BL9DW-AS7	Low Voltage 9W Bullet Lighting, 3000K, Black, Stake Mount			783352020802	48
BL9DW-HS7	Low Voltage 9W Bullet Lighting, 3000K, Bronze, Stake Mount			783352020819	48
FlexScape IL9 LED					
IL9DW-A	Low Voltage 9W Inground Lighting, 3000K, Black			783352021588	24
FlexScape Transformer					
TC152-12TP	Transformer for Low Voltage output, Voltage Control Switch (Low =11.5V, High=12.5V), Line voltage amperage draw: 150VA = 0.9 AMP, integral timer and photocell, 50/60Hz input			783352015044	24

Definitions

Colour Temperature (K)

The colour of light output by a light source is referenced as correlated colour temperature (CCT) and is measured in Kelvins (K).



2700K

3000K

4000K

5000K

Colour Rendering Index (CRI)

The effect a light source has on colour appearance is expressed as CRI, on a scale of 0-100. Natural outdoor light is used as a standard with a CRI of 100.



CRI 60

CRI 80

 CRI 90

Lumens (lm)

The measurement total light output by a light regardless of direction.

Candela (cd)

The measurement of light intensity emitted by a light source in a particular direction.



The **DesignLights Consortium® (DLC)** promotes high-quality, energy-efficient lighting products in collaboration with utilities and energy efficiency program members, manufacturers, lighting designers, and federal, state, and local entities.

DLC Premium is a higher-performance classification for luminaires and retrofit kits. Products with DLC Premium classification meet higher efficacy and lumen maintenance requirements.

A **Network Lighting Controls (NLC)** consists of an intelligent network of individually addressable luminaires and control devices, allowing for application of multiple control strategies, programmability, building- or enterprise-level control, zoning and rezoning using software, and measuring and monitoring. They can save 35% or more of lighting energy use in commercial buildings while providing a host of additional capabilities and benefits.



IP65

Protected from total dust ingress. Protected from low pressure water jets from any direction.



IP66

Protected from total dust ingress. Protected from high pressure water jets from any direction.



IP67

Protected from total dust ingress. Protected from immersion between 15 centimeters and 1 meter in depth.



IP68

Protected from total dust ingress. Protected from long term immersion up to a specified pressure.



The **ENERGY STAR**® symbol is the internationally recognized and trusted mark of high efficiency. ENERGY STAR certified products meet strict technical specifications for energy performance—tested and certified against a number of standards such as ANSI, IESNA, cUL, NEMA, etc.



A wet location is one where water may drip, splash, or flow on or against electrical equipment. This icon indicates that the fixture was engineered so that water cannot enter or accumulate in the wireway, lampholders or other electrical parts.



NSF International is an accredited, independent third-party certification body that tests and certifies products to verify they meet these public health and safety standards.

Brand Line Card

IoT Platform

interact

A secure IoT platform with software applications that deliver benefits to professional customers across a variety of business verticals.

Indoor Luminaire Brands

 **LEDALITE**

by @ignify

Strikingly aesthetic, unique and bold indoor lighting to make a rich statement in professional, commercial and institutional spaces.

LIGHTOLIER

by @ignify

Impactful, reliable track and downlighting solutions with uncompromising quality for professional and commercial spaces.

Day-Brite

CFI

by @ignify

Versatile commercial and industrial indoor lighting solutions built for functionality and dependable performance throughout the product life cycle.

Lamps & Controls

PHILIPS

Global lighting leader in LED and conventional lamps for every application.

Outdoor Luminaire Brands

LUMEC

by @ignify

Contemporary outdoor lighting that blends modern and traditional style with leading-edge engineering to provide functional elegance for urban and roadway spaces.

 **GARDCO**

by @ignify

Architecturally relevant, configurable and functional lighting solutions that enhance and complement outdoor spaces.

HADCO

by @ignify

Pedestrian and Landscape lighting solutions that blend craftsmanship with optical performance to provide a sense of security and beauty in parks and other public or residential settings.

KEENE

by @ignify

Contractor-friendly outdoor lighting solutions that help make the most of your time and budget.

Specialty

 **COLOR KINETICS**

Dynamic and intelligent lighting for architectural indoor, outdoor and entertainment spaces.

Electronics

ADVANCE

by  Signify

Offering a full range of reliable and robust ballasts, LED drivers and lighting components for the electrical wholesaler and OEM channels.

bodine

Innovative emergency lighting components / unit equipment designed for safety.

Signify proudly markets the best lighting brands in the world.

Learn more about the vast array of lighting solutions available from Signify. Visit www.signify.com



